

## BRACE EXTERIOR WALL

## SEW10359

JOB NAME

TYPE


W1 (#26)



WET

ADA

Sleek and modern, the Stile brand provides the clean appearance desired by today's architects and designers. Brace delivers maximized light output, as well as creates an inviting and comfortable space utilizing efficient T5 and T5HOs. UL listed for wet locations, this wall-mounted fixture offers integral ballasts and various shielding options. Available in two distinct looks, this sleek luminaire presents versions satisfying ADA requirements. It has the ability to add the finishing touch to modern lighting designs.

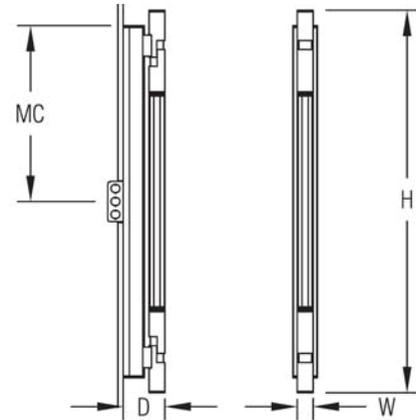

## Dimensions

W	H	D	MC
1.5 in	60.2 in	4.0 in	28.6 in
3.8 cm	152.9 cm	10.2 cm	72.6 cm

## Weight

Hanging weight: 25.0 lb (11.4 kg).

## Features

- Extruded acrylic tube with aluminum end caps maximizes output and creates uniform illumination.
- Standard thermoset polyester powder coat paint provides durable protection in a palette of color options. Custom colors available upon request.
- Versatile design allows fixture to be mounted in any orientation.

## Technical Notes

## Electrical

- Thermally protected ballast limits operating temperature.
- Integral electronic fluorescent ballast utilizes the latest energy-saving technology to maintain consistent color temperature, CRI and lumen maintenance, while eliminating the need for remote mounting and simplifying installation.
- Class "A" sound rated ballast for use in low ambient noise applications.
- ETL listed to UL standards (US and Canada) for use in wet locations.
- Meets NEC 410.73 double-ended, fluorescent lamp ballast disconnect requirements.

## Finish

- Housing and mounting components painted to match, unless otherwise specified.

## Mounting

- Mounts to 2" x 4" handy box.

## Additional Documents

[Color Chart \(http://www.specStile.com/PDFs/stile\\_color\\_chart.pdf\)](http://www.specStile.com/PDFs/stile_color_chart.pdf)

MODEL NUMBER	LAMPING	FINISH	VOLTAGE	OPTIONS	OPTIONS FINSH
<b>SEW10359</b>	<b>1F28</b>	<b>PT49</b>	<b>120V</b>	<b>AFT</b>	

Not all options are available in all configurations, consult factory for details.

Lamping		Photometry	Voltage		Options	
<input checked="" type="checkbox"/> <b>1F28</b>	<sup>1</sup> 1F28WT5/Mini Bipin	BRACE IES ZIP	<input checked="" type="checkbox"/> <b>120V</b>	120 Volt	<input checked="" type="checkbox"/> <b>AFT</b>	Frosted Tube
<input type="checkbox"/> <b>1F54</b>	<sup>1</sup> 1F54WT5H0/Mini Bipin	BRACE IES ZIP	<input type="checkbox"/> <b>277V</b>	277 Volt	<input type="checkbox"/> <b>AOS</b>	Asymmetric Opal Shield
					<input type="checkbox"/> <b>APS</b>	Asymmetric Perforated Sreen
					<input type="checkbox"/> <b>ASR</b>	Asymmetric Solid Reflector
					<input type="checkbox"/> <b>CT</b>	Cut-off Tube
					<input type="checkbox"/> <b>SOS</b>	Symmetric Opal Shield
					<input type="checkbox"/> <b>SPS</b>	Symmetric Perforated Shield
					<input type="checkbox"/> <b>SSR</b>	Symmetric Solid Reflector

<sup>1</sup> T5 & T8 Fluorescent Linear Lamp(s) Not Included

**Painted Finishes**

PT01 SuperWhite	PT07 Light Taupe	PT13 Warm Gray	PT19 Blue	PT29 Red Brass	PT42 Sky Blue	PT48 Brass
PT02 White	PT08 Medium Taupe	PT14 Light Gray	PT20 Dark Green	PT31 Medium Bronze	PT43 Teal	PT49 Bronze
PT03 Morning Light	PT09 Medium Gray	PT15 Sage	PT21 Pearl White	PT32 Dark Bronze	PT44 Green	
PT04 Warm White	PT10 Dark Gray	PT16 Spruce	PT22 Platinum	PT33 Dark Blue	PT45 Purple	
PT05 Putty	PT11 Black	PT17 Red	PT27 Deep Copper	PT40 Yellow	PT46 Aluminum	
PT06 Warm Beige	PT12 Dark Chocolate	PT18 Deep Red	PT28 Dark Stainless	PT41 Orange	PT47 Deep Red Brass	

**Metal and Plated Finishes**

AN01 Anodized Satin Aluminum
------------------------------

**Kit Details**



**AFT**  
Frosted Tube



**CT**  
Cut-off Tube



**SOS**  
Symmetric Opal Shield