



Crowne Plaza Hotel
Exterior Improvements
Site Aerial

Existing asphalt shingles to remain

Proposed porte cochere signage - see additional info

Existing asphalt shingles to remain

New fiber cement panels - Panel-2

Paint existing stucco finish - PT-2

SIGNAGE

"Wood-look" cement fiber panels at existing canopy - Panel-1

New stone at entry and columns - ST-1

A | South (Front) Entry

Paint existing stucco finish - PT-2

Existing asphalt shingles to remain

New aluminum gutter, leaders, and downspouts

Paint existing stucco finish - PT-2

"Wood-look" cement fiber panels at existing canopy - Panel-1

SIGNAGE

New stone at entry and columns - ST-1

New fiber cement panels - Panel-2

B | West (Side) Elevation)

Existing wood siding - PT-2 (replace and repair as required)

Clean and paint windows, trim and HVAC grilles - PT-4

Paint existing wood trim - PT-1

New fiber cement panels - Panel -2

Crowne Plaza Hotel Exterior Improvements Exterior Elevations



Paint existing stucco finish - PT-2
 "Wood-look" cement fiber panels at existing canopy - Panel-1

Paint existing stucco finish - PT-2
 Existing asphalt shingles to remain
 New aluminum gutter, leaders, and downspouts
 Existing signage

C | East (Side) Elevation

New stone at entry and columns - ST-1
 New fiber cement panels - Panel-2
 Paint existing stucco finish - PT-2
 Existing asphalt shingles to remain
 New aluminum gutter, leaders, and downspouts
 Existing signage



Existing wood siding - PT-2 (replace and repair as required)
 Clean and paint windows, trim and HVAC grilles - PT-4
 Paint existing wood trim - PT-1
 New fiber cement panels - Panel-2



D | North (Rear) Elevation

Existing wood siding - PT-2 (replace and repair as required)
 Clean and paint windows, trim and HVAC grilles - PT-4
 Paint existing wood trim - PT-1
 New fiber cement panels - Panel-2

Crowne Plaza Hotel
Exterior Improvements
 Exterior Elevations

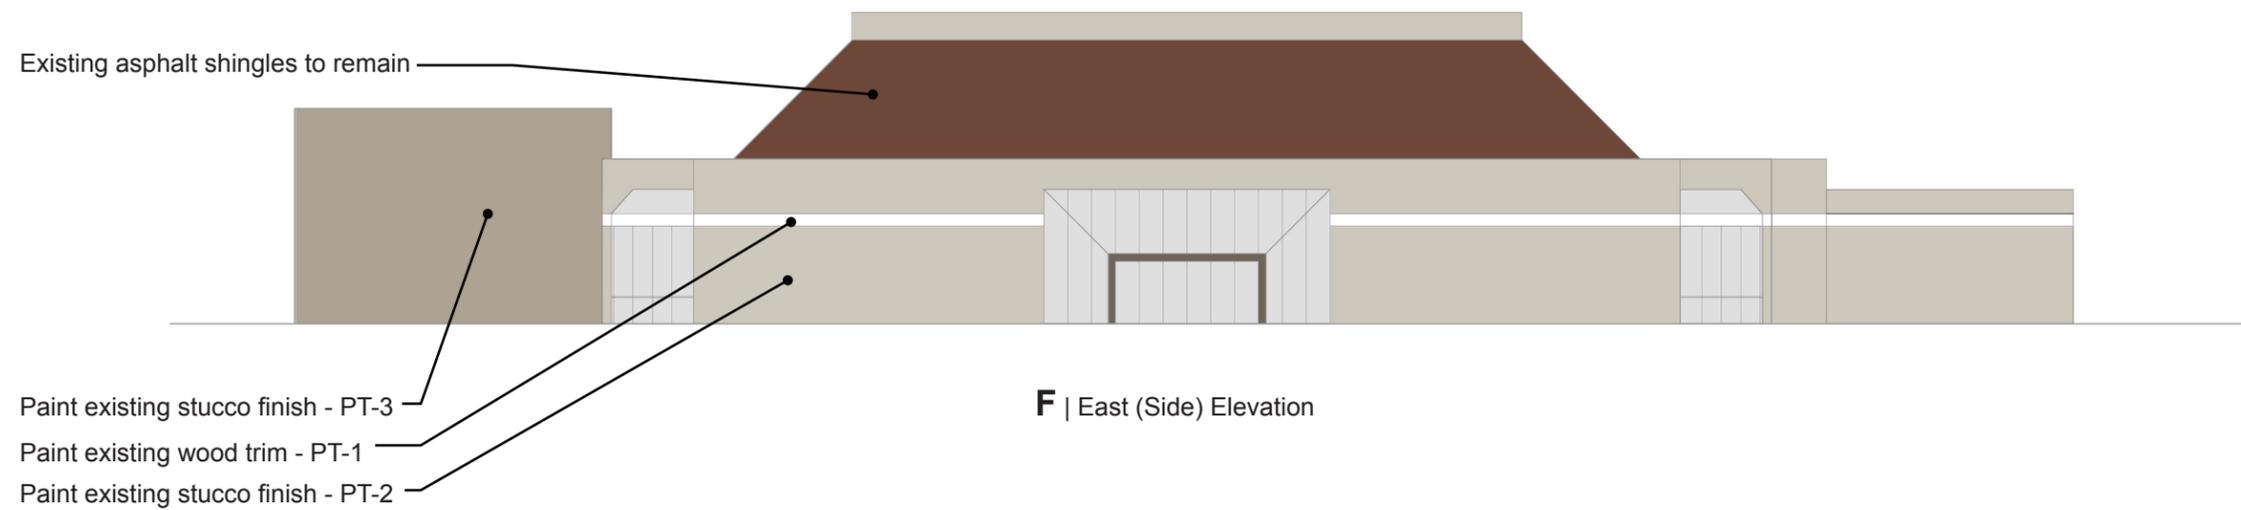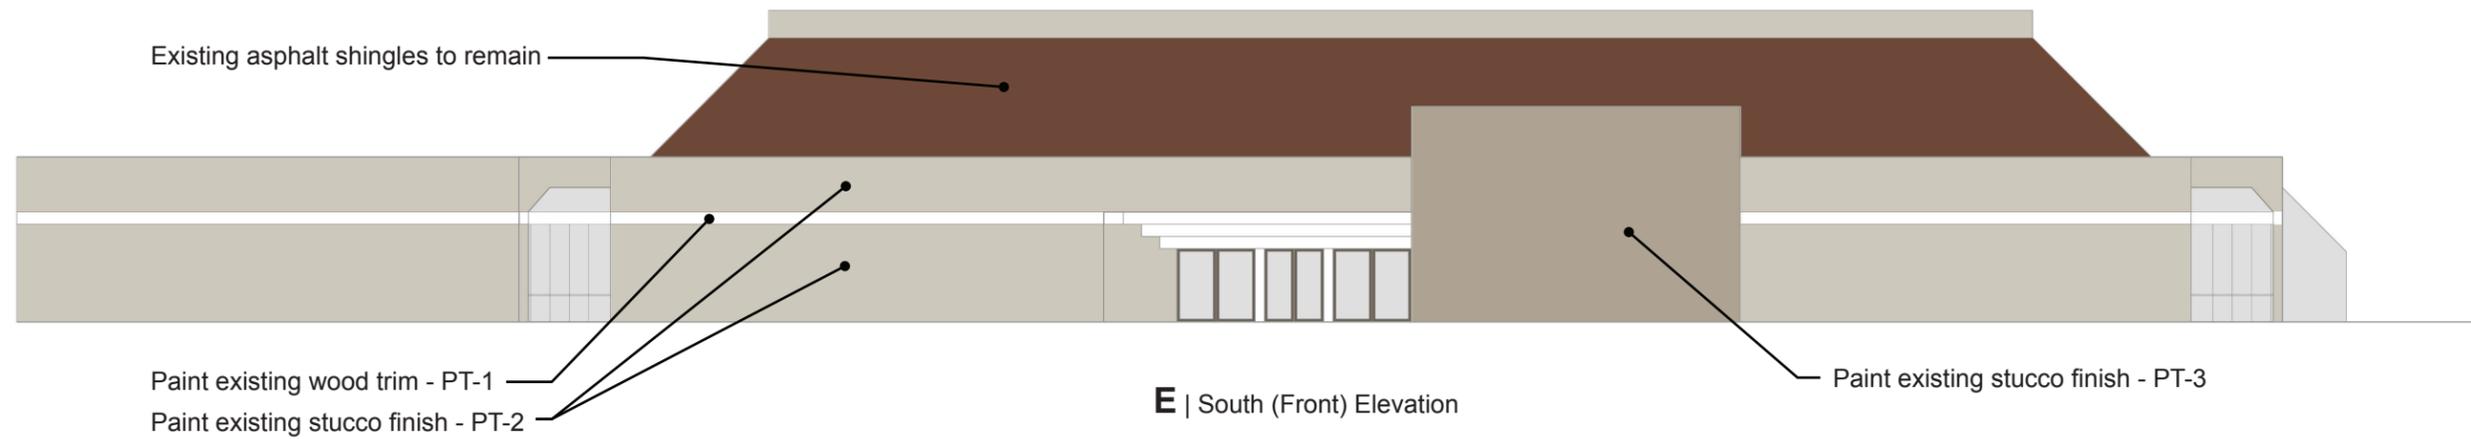

Crowne Plaza Conference Center
Exterior Improvements
 Exterior Elevations



New recessed lighting at entry.

Paint existing stucco finish - PT-2

Replace existing wall-mounted fixture with new decorative sconce.

Existing signage

New stone at entry and columns - ST-1

"Wood-look" cement fiber panels at existing canopy - Panel-1

Paint existing stucco finish - PT-2

Replace existing wall-mounted fixture with new decorative sconce.

Existing signage

