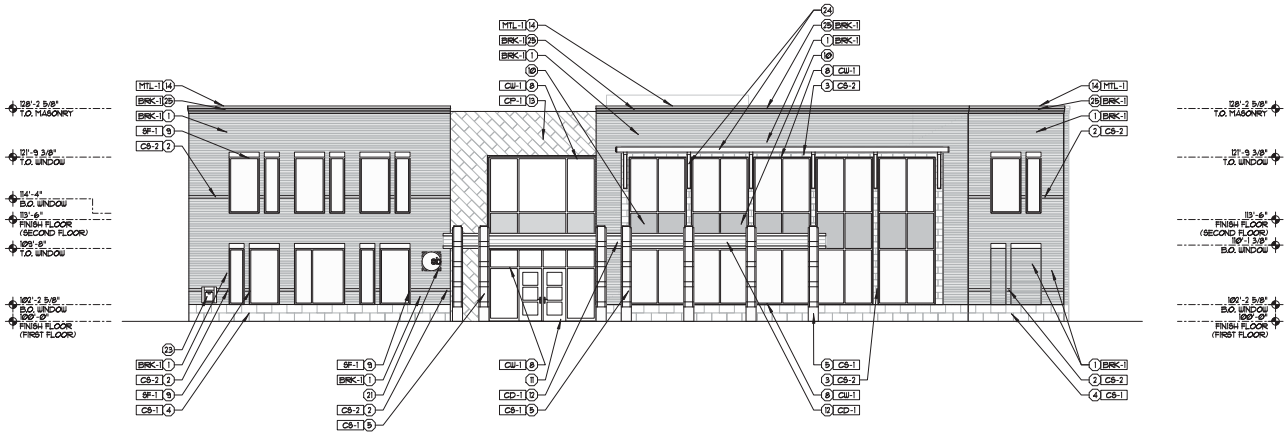

A NORTH BUILDING ELEVATION

SCALE: 1/8" = 1'-0"

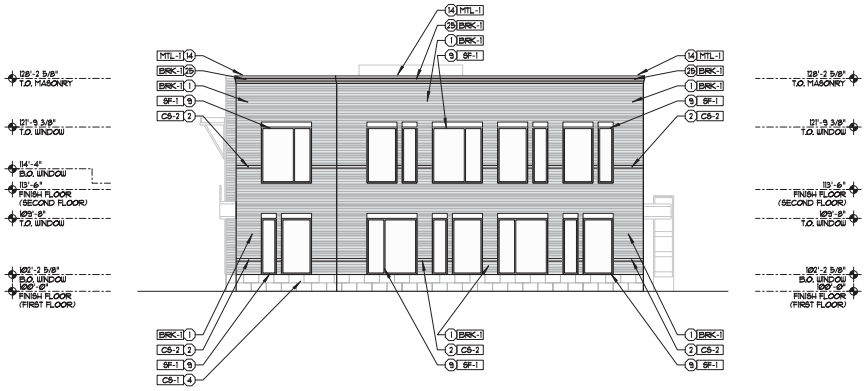

B EAST BUILDING ELEVATION

SCALE: 1/8" = 1'-0"



C SOUTH DRIVE-THRU ELEVATION

SCALE: 1/8" = 1'-0"



D WEST DRIVE-THRU ELEVATION

SCALE: 1/8" = 1'-0"

SYMBOL LEGEND

⬡	ELEVATION CODED NOTE TAG (SEE SHEET ZA-2.1 FOR SCHEDULE)
▭	MATERIAL / FINISH TAG (SEE SHEET ZA-2.1 FOR EXTERIOR MATERIAL FINISH KEY)

ELEVATION CODED NOTES

1. BRICK VENEER RUNNING BOND.
2. MANUFACTURED CAST STONE VENEER (ACCENT).
3. MANUFACTURED CAST STONE WINDOW CASING.
4. MANUFACTURED CAST STONE VENEER.
5. MANUFACTURED CAST STONE VENEER COLUMN.
6. MANUFACTURED CAST STONE SILL.
7. BRICK VENEER STREET WALL.
8. PREFINISHED ALUMINUM CURTAINWALL SYSTEM WITH 1" CLEAR LOW-E INSULATED GLASS UNITS.
9. PREFINISHED ALUMINUM STOREFRONT / WINDOW SYSTEM WITH 1" CLEAR LOW-E INSULATED GLASS UNITS.
10. 1" SPANDREL GLASS UNIT.
11. WOOD ENTRY DOOR w/ 1" CLEAR LOW-E INSULATED GLASS UNITS.
12. 4" WIDE CEDAR SIDING. (CLEAR FINISH).
13. COPPER WALL SIDING.
14. PREFINISHED METAL PARAPET COPING.
15. PREFINISHED METAL OVERFLOW DRAIN.
16. PREFINISHED METAL (24 GA.) EXTERIOR DOWNSPOUT CONNECTED TO STORM LINE.
17. ATM/ DRIVE-THRU BANK TELLER UNIT BY OWNER.
18. DRIVE-THRU BANK TELLER UNIT BY OWNER.
19. CONCRETE FILLED STEEL BOLLARD. PAINT.
20. WALL MOUNTED SIGN - 50 S.F. MAXIMUM AREA.
21. WALL MOUNTED SIGN - 6 S.F. MAXIMUM AREA.
22. GROUND MOUNTED CONDENSING UNIT(S).
23. NIGHT- DEPOSITORY BOX BY OWNER.
24. CEDAR BRACKETS w/ PREFINISHED STEEL SUNSHADE SYSTEM.
25. BRICK VENEER CORBELED COURSE (HEAD). (PULL 1/2" - TYP. OF 3 COURSES)
26. SURFACE MOUNTED DECORATIVE LIGHT FIXTURE.

EXTERIOR MATERIAL FINISH KEY

MARK	MANUFACTURER	DESCRIPTION	REMARKS
MODULAR BRICK VENEER			
BRK-1	BELDEN	MODULAR BELCREST LIGHTHOUSE VELOUR	
CEDAR SIDING			
CD-1	UFP CEDAR (OR EQUAL)	TONGUE AND GROOVE SIDING CLEAR FINISH	
COPPER WALL SIDING			
CP-1	DRI-DESIGN	COPPER WALL PANEL/SIDING PRE PATINA COPPER FINISH	
MANUFACTURED CAST STONE			
CS-1	ARRISCRAFT	ADAIR LIMESTONE MASONRY UNITS	--
CS-2	ROCK CAST	CUSTOM CAST STONE SERIES	CAST STONE DECORATIVE ACCENT BAND(S) AND WINDOW CASING
METAL COPING, FLASHING, DOWNSPOUTS			
MTL-1	DMI	DYNACLAD PVDF PAINT FINISH	
STOREFRONT/CURTAINWALL SYSTEM			
SF-1	KAWNEER	2" x 4 1/2" - TRIFAB VG 451T COLOR CHARCOAL	
CW-1	KAWNEER	2 1/2" x 6" - 1600 WALL SYSTEM 1 COLOR CHARCOAL	

FORD & ASSOCIATES

1500 West First Avenue
Columbus, Ohio 43212
P: 614.488.6252
F: 614.488.3963

ARCHITECTS

LINCOLN CONSTRUCTION

STATE BANK

Banker Drive, Dublin, Ohio

For

Lincoln Construction
4780 Shuster Road, Columbus, Ohio 43214

Copyright 2014. All Drawings are and shall remain the property of Ford & Associates Architects, Inc. and may not be used, duplicated, or altered without the written consent of the Architect.

PRELIMINARY
NOT FOR CONSTRUCTION

ISSUE	REVISION	DATE
PRELIMINARY		NOV. 15, 2013
		NOV. 25, 2013
		DEC. 5, 2013
		DEC. 10, 2013
		JAN. 3, 2014
DUBLIN PREL.		JAN. 3, 2014
DUBLIN SUB.		FEB. 3, 2014
		FEB. 4, 2014
		FEB. 5, 2014
		MAY 16, 2014

BUILDING ELEVATIONS

FAAP 13090.00

ZA-2.1

STATE BANK

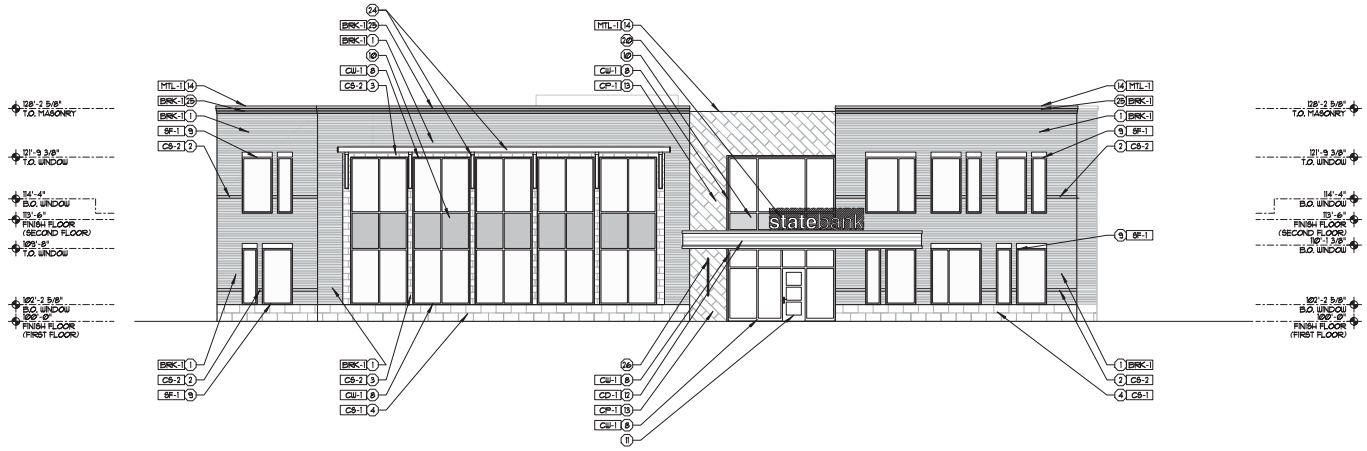

A SOUTH BUILDING ELEVATION

SCALE: 1/8" = 1'-0"

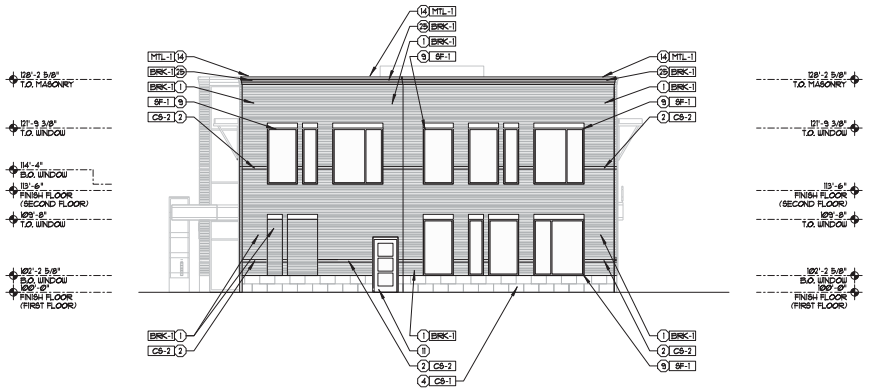

B WEST BUILDING ELEVATION

SCALE: 1/8" = 1'-0"

SYMBOL LEGEND

⬡	ELEVATION CODED NOTE TAG (SEE SHEET ZA-2.1 FOR SCHEDULE)
▭	MATERIAL / FINISH TAG (SEE SHEET ZA-2.1 FOR EXTERIOR MATERIAL FINISH KEY)

ELEVATION CODED NOTES

1. BRICK VENEER RUNNING BOND.
2. MANUFACTURED CAST STONE VENEER (ACCENT).
3. MANUFACTURED CAST STONE WINDOW CASING.
4. MANUFACTURED CAST STONE VENEER.
5. MANUFACTURED CAST STONE VENEER COLUMN.
6. MANUFACTURED CAST STONE SILL.
7. BRICK VENEER STREET WALL.
8. PREFINISHED ALUMINUM CURTAINWALL SYSTEM WITH 1" CLEAR LOW-E INSULATED GLASS UNITS.
9. PREFINISHED ALUMINUM STOREFRONT / WINDOW SYSTEM WITH 1" CLEAR LOW-E INSULATED GLASS UNITS.
10. 1" SPANDREL GLASS UNIT.
11. WOOD ENTRY DOOR w/ 1" CLEAR LOW-E INSULATED GLASS UNITS.
12. 4" WIDE CEDAR SIDING. (CLEAR FINISH).
13. COPPER WALL SIDING.
14. PREFINISHED METAL PARAPET COPING.
15. PREFINISHED METAL OVERFLOW DRAIN.
16. PREFINISHED METAL (24 GA.) EXTERIOR DOWNSPOUT CONNECTED TO STORM LINE.
17. ATM/ DRIVE-THRU BANK TELLER UNIT BY OWNER.
18. DRIVE-THRU BANK TELLER UNIT BY OWNER.
19. CONCRETE FILLED STEEL BOLLARD. PAINT.
20. WALL MOUNTED SIGN - 50 S.F. MAXIMUM AREA.
21. WALL MOUNTED SIGN - 6 S.F. MAXIMUM AREA.
22. GROUND MOUNTED CONDENSING UNIT(S).
23. NIGHT- DEPOSITORY BOX BY OWNER.
24. CEDAR BRACKETS w/ PREFINISHED STEEL SUNSHADE SYSTEM.
25. BRICK VENEER CORBELED COURSE (HEAD). (PULL 1/2" - TYP. OF 3 COURSES)
26. SURFACE MOUNTED DECORATIVE LIGHT FIXTURE.

EXTERIOR MATERIAL FINISH KEY

MARK	MANUFACTURER	DESCRIPTION	REMARKS
MODULAR BRICK VENEER			
BRK-1	BELDEN	MODULAR BELCREST LIGHTHOUSE VELOUR	
CEDAR SIDING			
CD-1	UFP CEDAR (OR EQUAL)	TONGUE AND GROOVE SIDING CLEAR FINISH	
COPPER WALL SIDING			
CP-1	DRI-DESIGN	COPPER WALL PANEL/SIDING PRE PATINA COPPER FINISH	
MANUFACTURED CAST STONE			
CS-1	ARRISCRAFT	ADAIR LIMESTONE MASONRY UNITS	--
CS-2	ROCK CAST	CUSTOM CAST STONE SERIES	CAST STONE DECORATIVE ACCENT BAND(S) AND WINDOW CASING
METAL COPING, FLASHING, DOWNSPOUTS			
MTL-1	DMI	DYNACLAD PVDF PAINT FINISH	
STOREFRONT/CURTAINWALL SYSTEM			
SF-1	KAWNEER	2" x 4 1/2" - TRIFAB VG 451T COLOR CHARCOAL	
GW-1	KAWNEER	2 1/2" x 6" - 1600 WALL SYSTEM 1 COLOR CHARCOAL	

FORD & ASSOCIATES

1500 West First Avenue
Columbus, Ohio 43212
P: 614.488.6252
F: 614.488.3963

ARCHITECTS

LINCOLN CONSTRUCTION

STATE BANK

Banker Drive, Dublin, Ohio

For

Lincoln Construction
4780 Sluster Road, Columbus, Ohio 43214

Copyright 2014. All Drawings are and shall remain the property of Ford & Associates Architects, Inc. and may not be used, duplicated, or altered without the written consent of the Architect.

PRELIMINARY
NOT FOR CONSTRUCTION

ISSUE	REVISION	DATE
PRELIMINARY		NOV. 15, 2013
		NOV. 25, 2013
		DEC. 5, 2013
		DEC. 10, 2013
		JAN. 3, 2014
DUBLIN PREL.		JAN. 9, 2014
DUBLIN SUB.		FEB. 3, 2014
		FEB. 4, 2014
		FEB. 5, 2014
		MAY 16, 2014

BUILDING ELEVATIONS

FAA# 13090.00

ZA-2.2

STATE BANK

NORTH VIEW

Ford & Associates

ARCHITECTS

STATE BANK

DUBLIN, OHIO

MAY 16, 2014

SOUTH VIEW

Ford & Associates

ARCHITECTS

STATE BANK

DUBLIN, OHIO

MAY 16, 2014