

THIS DRAWING IS COPYRIGHTED AND IS THE EXCLUSIVE PROPERTY OF BLENDON GARDENS INC. IT SHALL NOT BE REPRODUCED, TRANSFERRED OR OTHERWISE USED
WITHOUT WRITTEN PERMISSION.

KIDDIE SRY ROAD, DUBL PROPOSED 6055 AVE


REVISIONS:

DATE: MAY 25, 2017

DRAWN BY: TIM OSTERFELD

CHECKED BY: B. THORNTON

L-2

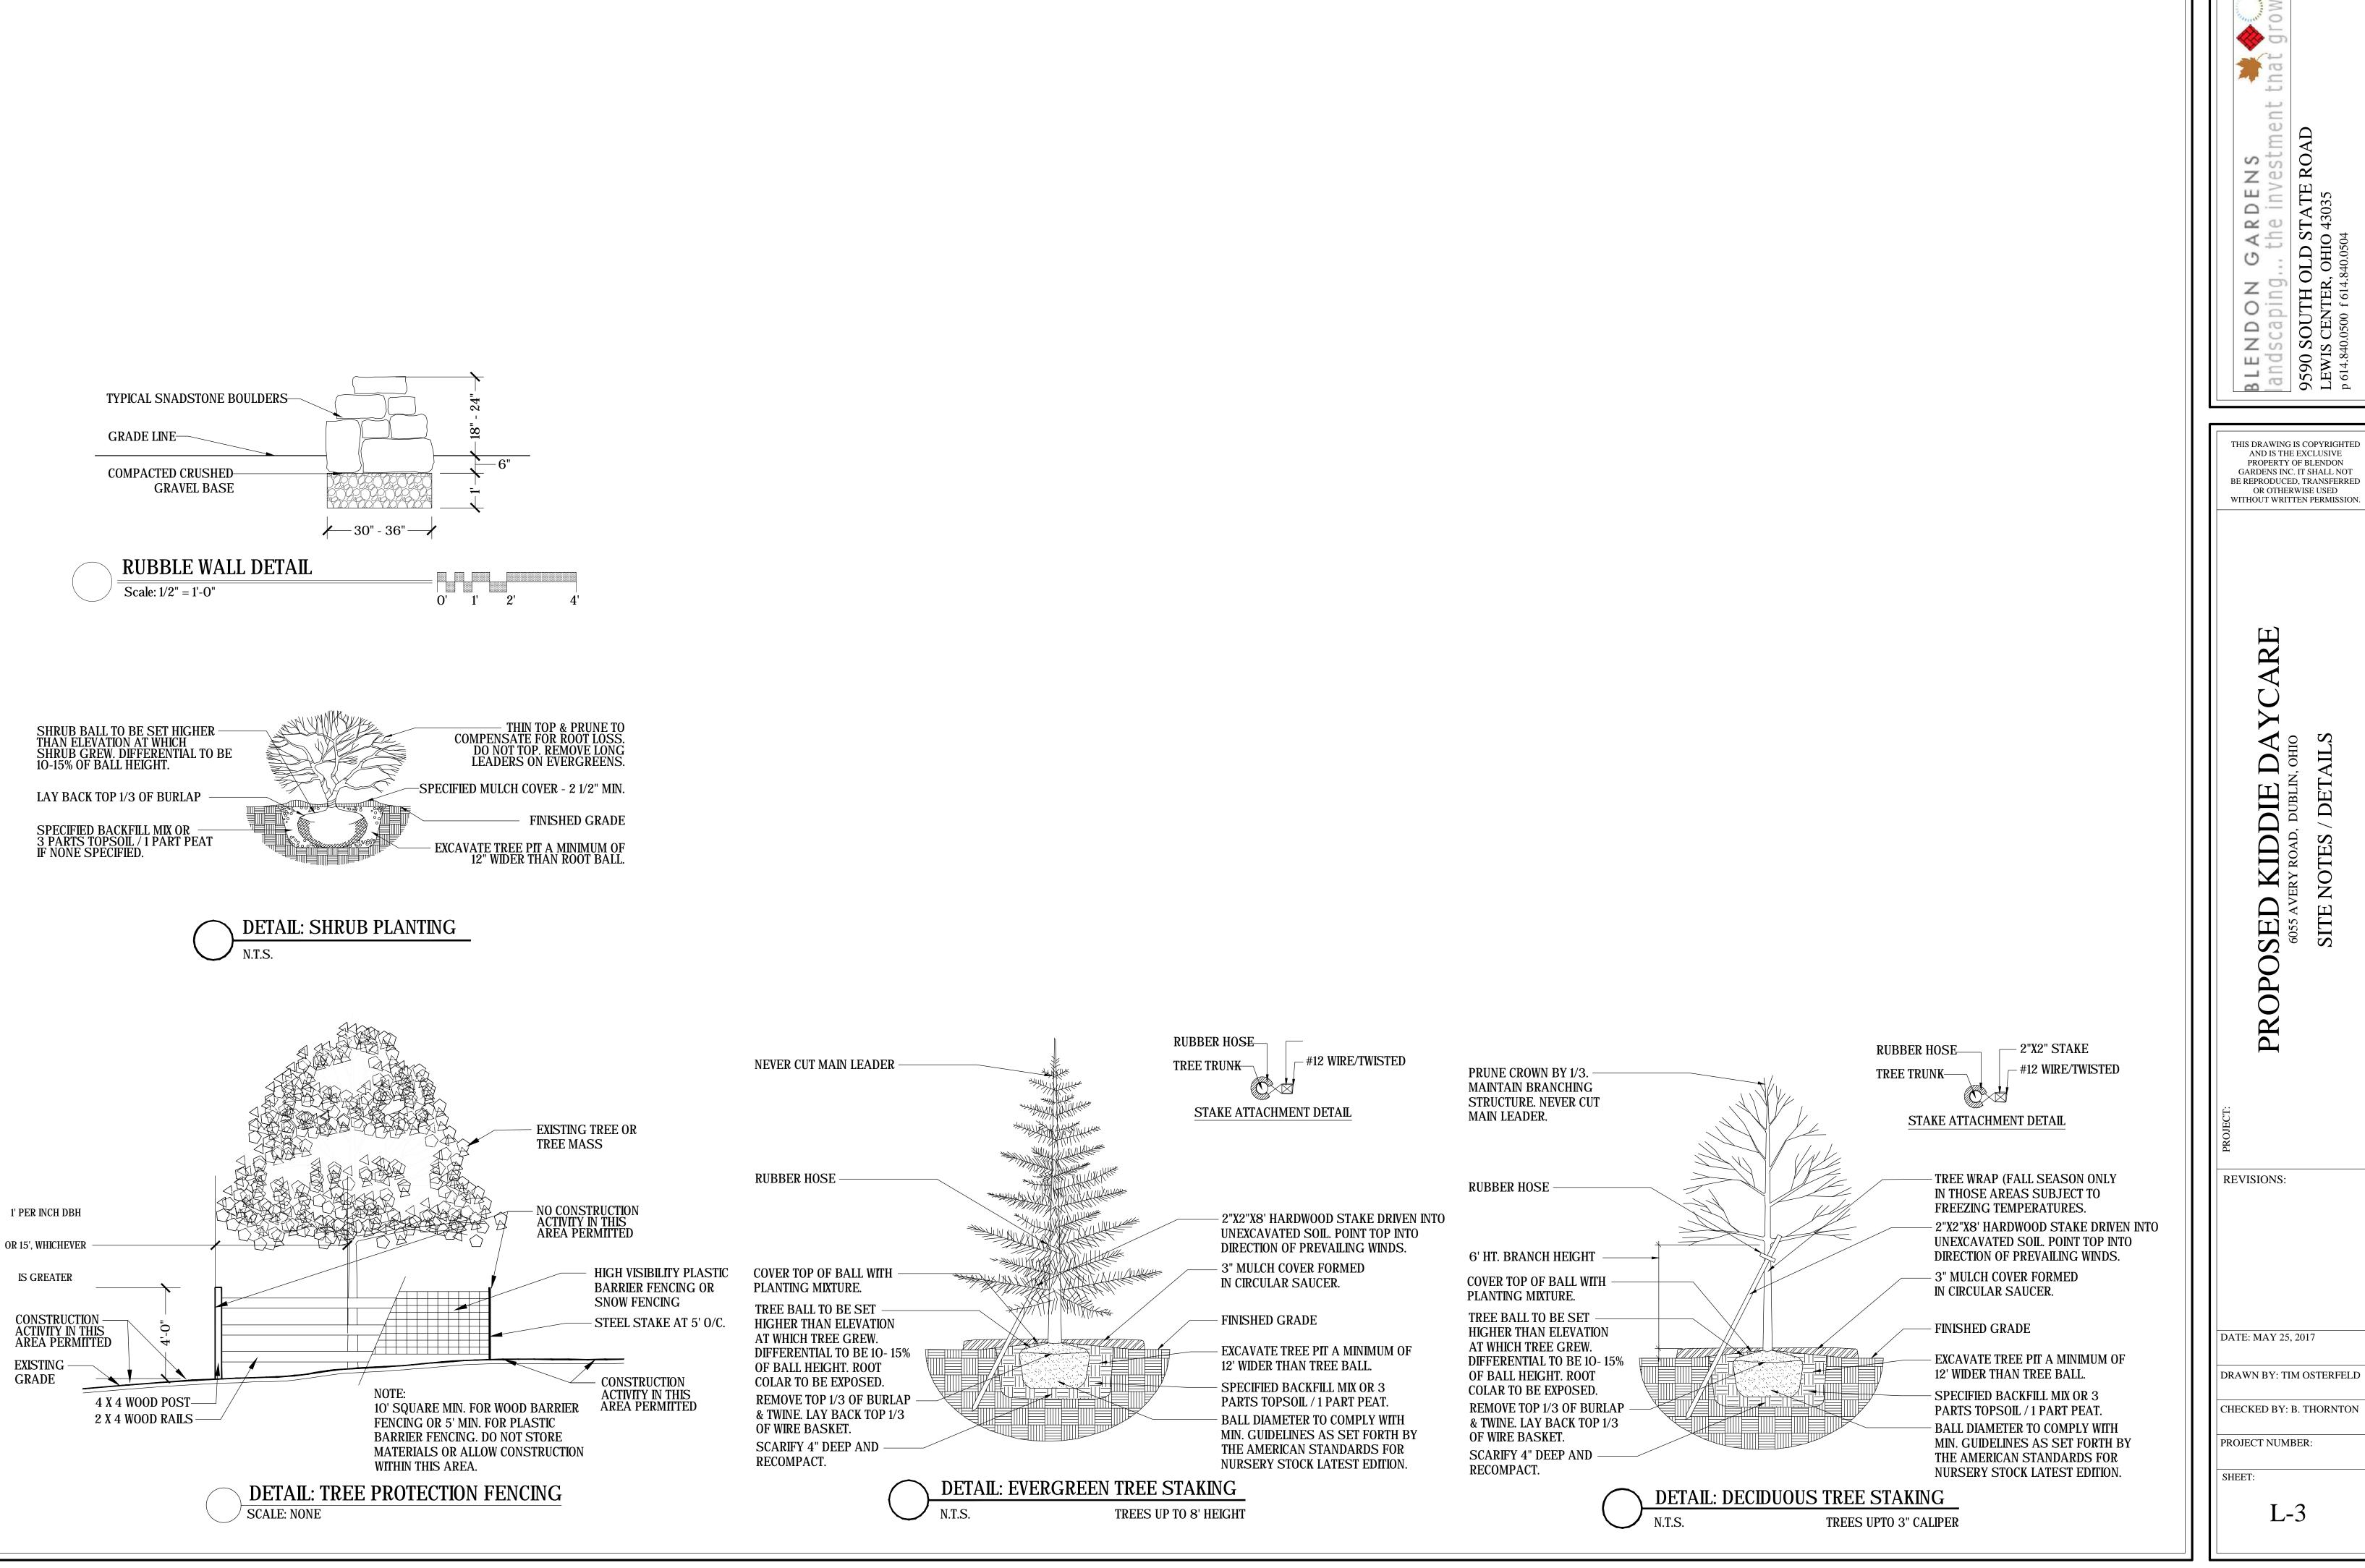

2 THIS DRAWING IS COPYRIGHTED AND IS THE EXCLUSIVE PROPERTY OF BLENDON GARDENS INC. IT SHALL NOT BE REPRODUCED. TRANSFERRED OR OTHERWISE USED WITHOUT WRITTEN PERMISSION. KIDDIE SRY ROAD, DUBL SED PROPO: **REVISIONS:**

L-3



Rubble Wall Example Photo

FirstPlay Toddler Design #5

Equipment Manufacturer



FP-525




FirstPlay Toddler Design #5

Equipment Manufacturer



FP-525



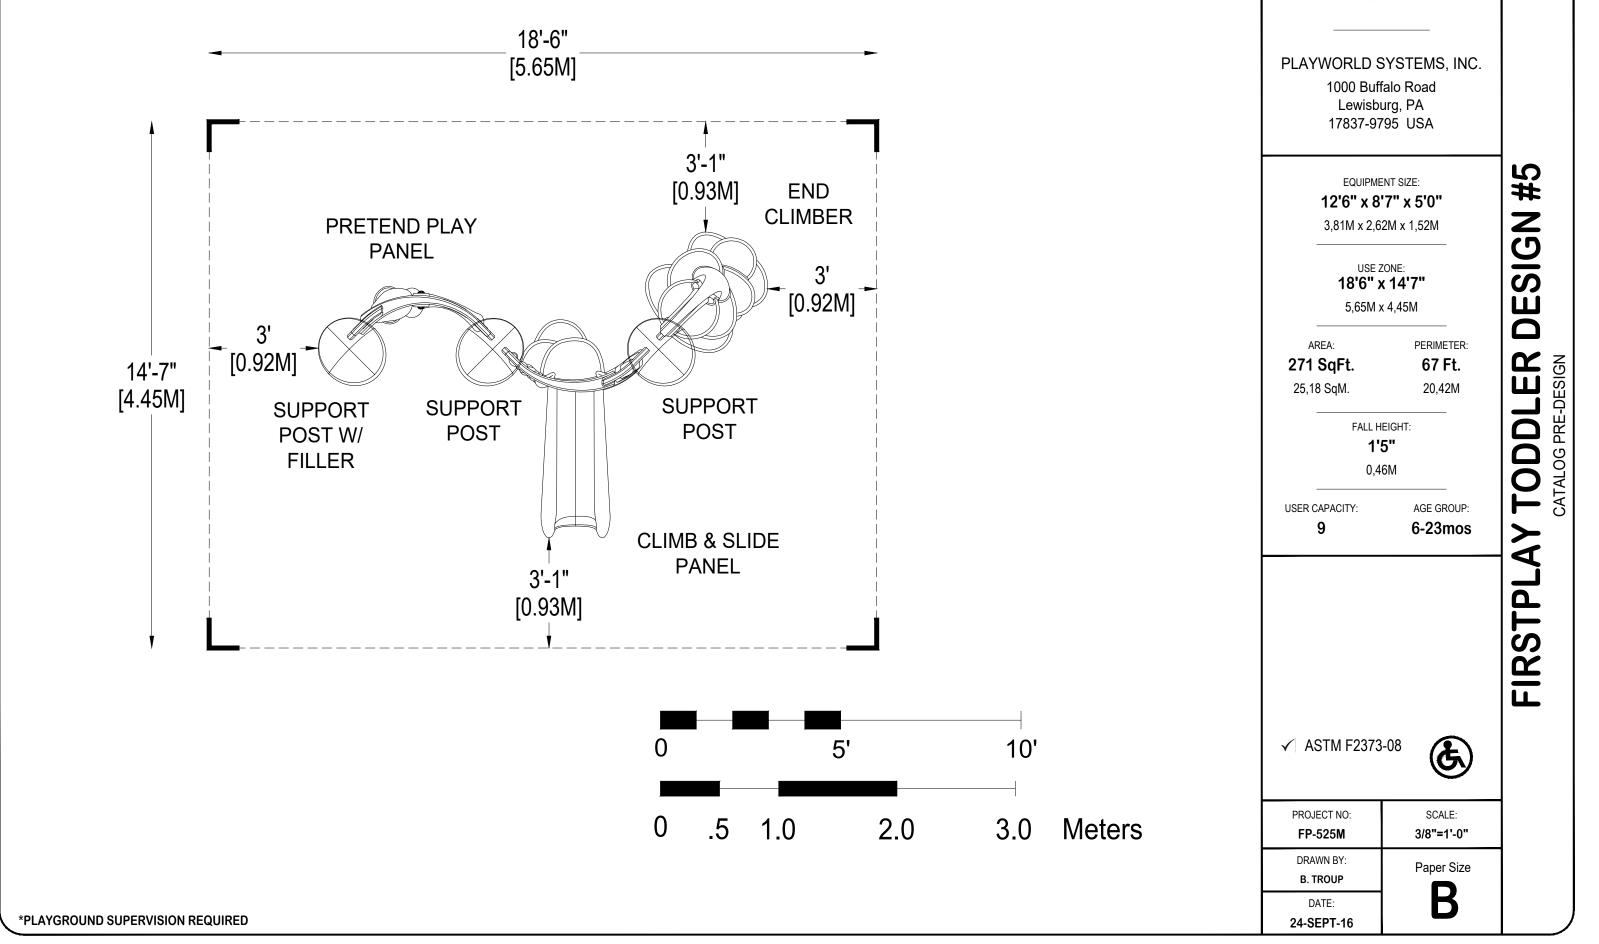

> PLAYWORLD

> PLAYWORLD

FirstPlay Toddler Design 5

Design Number: FP-525M - Bill Of Material

Ref.

No.	Part No.	Description	Quantity
	FirstPlay		
1	ZZFP4000	SUPPORT POST	3
2	ZZFP4001	PRETEND PLAY PANEL	1
3	ZZFP4002	CLIMB AND SLIDE PANEL	1
4	ZZFP4004	END CLIMBER	1
5	ZZFP4006	SUPPORT POST FILLER	1
	Additional T	ool & Maintenance Kits	
6	ZZUN9910	SURFACING WARNING LABEL KIT	1



FirstPlay Toddler Design 5

Design Number: FP-525M - Compliance and Technical Data

Reference Document: ASTM F1487

Ref. No. Part No.	Qty. Description	Unit ASTM Status	Total Weight (lbs)	Pre- Post- Consumer Recycled Content (lbs)	CO2e Footprint (kgs)	Users	Install Hours	Concrete (Yds3)	Active Play Events
1 ZZFP4000	3 SUPPORT POST	N/A	52.08		554	3	1.50	0.00	3
2 ZZFP4001	1 PRETEND PLAY PANEL	N/A	34.08		243	2	0.50	0.00	1
3 ZZFP4002	1 CLIMB AND SLIDE PANEL	N/A	65.02		423	2	0.50	0.00	1
4 ZZFP4004	1 END CLIMBER	N/A	34.61		206	2	0.50	0.00	1
5 ZZFP4006	1 SUPPORT POST FILLER	N/A	4.89		64	0	0.25	0.00	0
6 ZZUN9910	1 SURFACING WARNING LABEL KIT	Certified	0.05		1	0	0.25	0.00	0
		Totals:	190.73	0 0	1,490	9	3.50	0.00	6
			85.83 Kd	a 0 Kg 0	Kg 1	Metric T	ons	0.00	m3

FirstPlay Toddler Design 5

Design Number: FP-525M - Compliance and Technical Data

Reference Document: ASTM F1487

				Pre- Post-					
		Unit	Total	Consumer	CO2e				Active
Ref.		ASTM	Weight	Recycled Content	Footprint		Install	Concrete	Play
No. Part No.	Qty. Description	Status	(lbs)	(lbs)	(kgs)	Users	Hours	(Yds3)	Events



ASTM F1487

The lay-out for this custom playscape, design number FP-525M, has been configured to meet the requirements of the ASTM F1487 standard. In addition, each of the above components listed as "Certified" have been tested and are IPEMA certified. Components listed as "Not Applicable" do not fall within the scope of the ASTM F1487 standard and have not been tested. IPEMA certification can be verified on the IPEMA website, www.ipema.org. In the interest of playground safety, IPEMA provides a Third Party Certification Service which validates compliance.

2010 ADA Standards for Accessible Design

The lay-out was also designed to meet the 2010 Standards published 15-Sep-2010, by the Department of Justice when installed over a properly maintained surfacing material that is in compliance with ASTM F1951 "Accessibility of Surface Systems Under and Around Playground Equipment" as well as ASTM F1292, "Impact Attenuation of Surfacing Materials Within the Use Zone of Playground Equipment", appropriate for the fall height of the structure.

Installation Times

Installation times are based on one experienced installer. A crew of three experienced individuals can perform the installation within the given time, each member working 1/3 of the given hours. [Eg. Installation Time = 30 hours. For a crew of three, each member will work 10 hours on the installation for a total of 30 hours on the project.]

Carbon Footprint

The CO2e (carbon footprint given in Kilograms and Metric Tons) listed above is a measure of the environmental impact this play structure represents from harvesting raw materials to the time it leaves our shipping dock. Playworld Systems nurtures a total corporate culture that is focused on eliminating carbon producing processes and products, reducing our use of precious raw materials, reusing materials whenever possible and recycling materials at every opportunity. Playworld Systems elected to adopt the Publicly Available Specification; PAS 2050 as published by the British Standards Institute and sponsored by Defra and the Carbon Trust. The PAS 2050 has gained international acceptance as a specification that measures the greenhouse gas emissions in services and goods throughout their entire life cycle.

Pre-Consumer Recycle Content

A measurement, in pounds, that qualifies the amount of material that was captured as waste and diverted from landfill during an initial manufacturing process and is being redirected to a separate manufacturing process to become a different product. E.g. 100% of our Aluminum Tubing is made from captured waste material during the manufacturing process of extruded Aluminum products such as rods, flat bars and H-channels.

Post-Consumer Recycle Content

A measurement, in pounds, that qualifies the amount of material that was once another product that has completed its lifecycle and has been diverted from a landfill as a solid waste through recycling and is now being used in a Playworld Systems' product. E.g. **20% to 40% of the steel in our steel tubing and sheet steel have been diverted from landfills. Automobiles are scrapped and recyclable steel is purchased by the steel mill that produces our raw product. ** The amount of Post-Consumer recycled steel fluctuates daily based on the availability of the recycled steel.



Equipment Manufacturer



FUN-1481



Equipment Manufacturer



FUN-1481






Primary



Natural



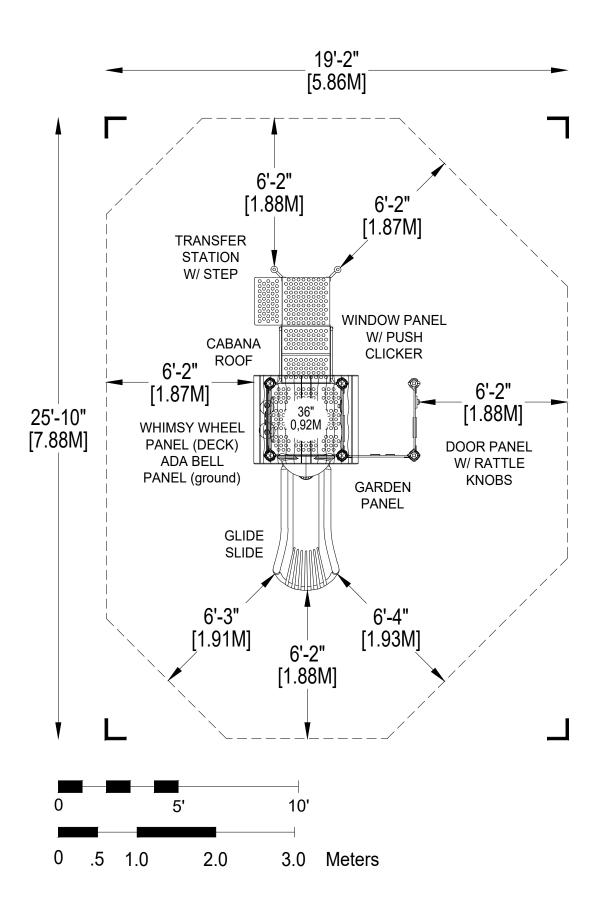



PLAYWORLD SYSTEMS, INC.

1000 Buffalo Road Lewisburg, PA 17837-9795 USA

EQUIPMENT SIZE:

6'11" x 13'6" x 10'4"

2,11M x 4,11M x 3,15M

USE ZONE: 19'2" x 25'10"

5,86M x 7,88M

AREA:

PERIMETER:

423 SqFt.

77 Ft.

39,3 SqM.

23,47M

FALL HEIGHT: **3 Ft.**

0,91M

AGE GROUP:

18

USER CAPACITY:

2-5

	IE.	Total Elevated Play Activities: 3						
	ED	Total Ground	d-Level Play Activ	vities: 3				
	ADA SCHEDULE	Accessible Elevated Activities	Accessible Ground-Level Activities	Accessible Ground-Level Play Types				
Required		2	1	1				
Provided		3	2	2				


✓ ASTM F1487-11

✓ CPSC #325



PROJECT NO: FUN-1481C	SCALE: 1/4"=1'-0"
DRAWN BY: M. MERTZ	Paper Size
DATE: 28-SEP-16	B

*PLAYGROUND SUPERVISION REQUIRED

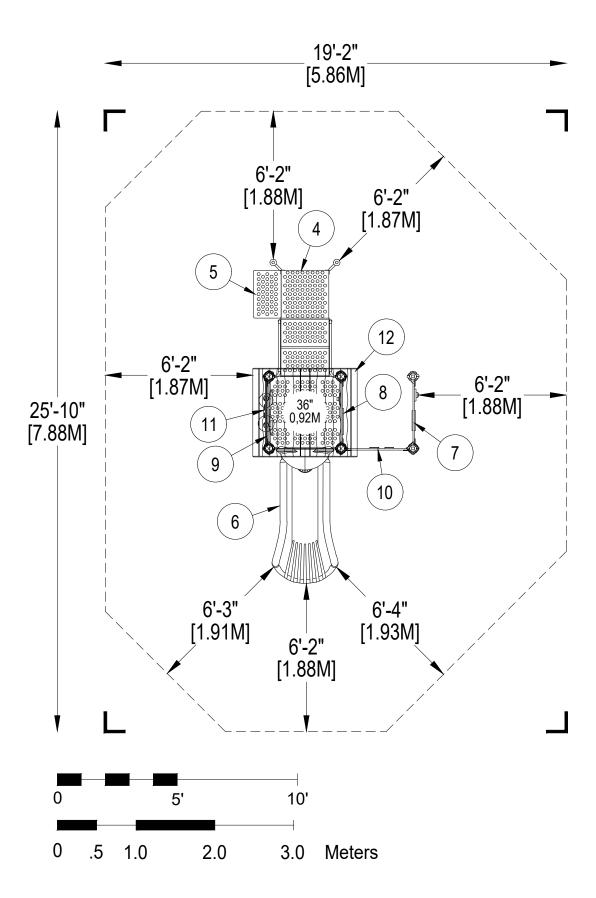



PLAYWORLD SYSTEMS, INC.

1000 Buffalo Road Lewisburg, PA 17837-9795 USA

EQUIPMENT SIZE:

6'11" x 13'6" x 10'4"

2,11M x 4,11M x 3,15M

USE ZONE: 19'2" x 25'10"

5,86M x 7,88M

AREA:

39,3 SqM.

PERIMETER:

423 SqFt.

77 Ft.

23,47M

FALL HEIGHT:

3 Ft.

0,91M

AGE GROUP:

USER CAPACITY: 18

2-5

	_						
	[]	Total Elevated Play Activities: 3					
	SCHEDULE	Total Ground	d-Level Play Activ	vities: 3			
	ADA SCH	Accessible Elevated Activities	Accessible Ground-Level Activities	Accessible Ground-Level Play Types			
Required Provided		quired 2 1		1			
		3	2	2			

✓ ASTM F1487-11


✓ CPSC #325



PROJECT NO: FUN-1481C	SCALE: 1/4"=1'-0"
DRAWN BY: M. MERTZ	Paper Size
DATE:	B
28-SEP-16	


DETAIL 1

Support Post, Spiral Slide and RockBlocks Post Footing Detail

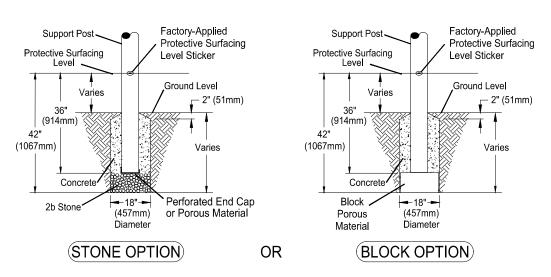

DETAIL 2


GroundZerO. Cantilever and "T" Post Footing Detail

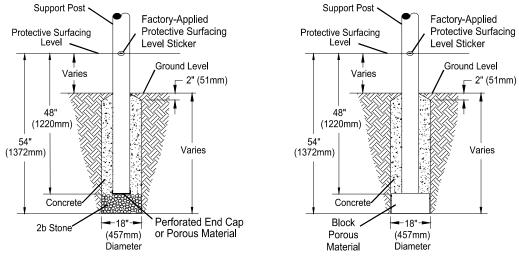

OR

(BLOCK OPTION)


DETAIL 3 Component Footing Detail

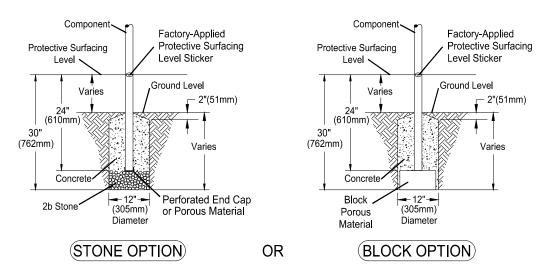

DETAIL 4

(STONE OPTION)

Surface Mount Detail

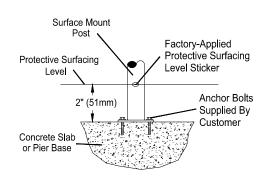

INSTALLATION NOTES:

- 1) Paved surfaces, such as asphalt and concrete, are not acceptable for use under your structure.
- 2) It is the consumer's responsibility to check with local utilities prior to excavating footings for any underground utility lines that may exist within the installation area.
- 3) It is the consumer's responsibility to check local soil conditions and drainage within the site area. Inquire with local contractors for appropriate recommendations.
- 4) If the structure is to be installed across uneven terrain maintain the support post mark for protective surfacing level at the lowest grade. Adjust other footings accordingly.
- 5) The base of footings must be below frost lines.
- 6) Do not encase the bottom of support posts in concrete. Place all posts directly on packed stone.
- 7) Assemble the entire structure before pouring concrete unless specifically instructed to do so in the individual component installation instructions.
- 8) Read completely the installation instructions provided with your structure prior to beginning construction.

SITE NOTES:

- 1) The site plan provided must be checked against the actual site area to ensure that placement of your structure meets required clearances.
- 2) The dimensions labeled are for location of footing holes, not exact placement of equipment. Assemble, plumb, and level equipment before pouring concrete.
- 3) There must be a minimum distance of 6' (1830mm) between any obstacle, sidewalk, etc., and your structure.
- 4) Slides must have a use zone that extends out from the lower exit section of the slide a distance that is at least 6' (1830mm) or equal to the vertical distance from the highest point of the sliding surface to the top of the protective surfacing, whichever is greater. The slide use zone should not extend greater than 8' (2438mm) from the end of the lower exit section
- 5) The complete area, including the space under and around the equipment, must be covered with an impact attenuating material. See the 1997 publication, "Handbook for Public Playground Safety" published by the U.S. Consumer Product Safety Commission, for guidelines and recommendations on the type and depth of surfacing material. For a copy of the "Handbook for Public Playground Safety" write to: U.S. Consumer Product Safety Commission Office of Information and Public Affairs

Washington, D.C. 20207


6) Supervise children as they play

⇒ PLAYWORLD*

PLAYWORLD SYSTEMS, INC.

1000 Buffalo Road Lewisburg, PA 17837-9795 USA

FOOTING LEGEND



COMPONENT FOOTING (DETAIL 3)



CHALLENGERS

PLAYMAKERS

F0

SPIRAL SLIDE CENTER POST FOOTING (DETAIL1)



SUPPORT POST FOOTING (DETAIL 1 or 4) (112" INDICATES POST LENGTH)



CANTILEVER, "T" POST, AND COMPONENT POST FOOTING (DETAIL 2) (ZZCH1850 INDICATES PART NUMBER)



GROUND ZERO POST FOOTING (DETAIL 2) (144" INDICATES POST LENGTH)

FOOTING DETAIL

SCALE: NOT TO SCALE

DRAWN BY: **TECH SALES**


28-JUNE-13

Paper Size

В

FOOTING LEGEND

Lewisburg, PA 17837-9795 USA



COMPONENT FOOTING (DETAIL 3)



SPIRAL SLIDE CENTER POST FOOTING (DETAIL1)



SUPPORT POST FOOTING (DETAIL 1 or 4) (112" INDICATES POST LENGTH)



CANTILEVER, "T" POST, AND COMPONENT POST FOOTING (DETAIL 2)
(ZZCH1850 INDICATES PART NUMBER)



GROUND ZERO POST FOOTING (DETAIL 2) (144" INDICATES POST LENGTH)

PROJECT NO: FUN-1481C SCALE:

1/4"=1'-0"


DRAWN BY: M. MERTZ

DATE:

Paper Size

B

28-SEP-16

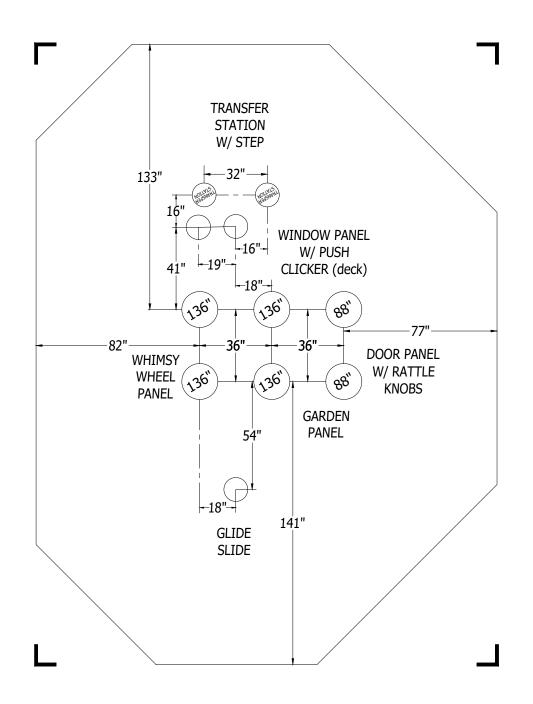

Ш CLUBHOUS CATALOG PRE-DESIGN

Design Number: FUN-1481C - Bill Of Material

Ref.

No.	Part No.	Description	Quantity
	Posts		
1	ZZCH0029	3.5in OD x 136in STEEL POST W/O CAP	4
2	ZZCH0356	3.50in x 88in STEEL POST w/CAP	2
	Decks & Kic	k Plates	
3	ZZCH0616	SQUARE COATED DECK ASSEMBLY	1
	ADA Items		
4	ZZCH2006	TRANSFER STATION (36in DECK)	1
5	ZZUN2019	APPROACH STEP FOR TRANSFER STATION	1
	Slides		
6	ZZCH3127	GLIDE SLIDE (36in DECK)	1
	Activity Pan	els	
7	ZZCH4506	DOOR PANEL W/ RATTLE KNOBS (GROUND LEVEL)	1
8	ZZCH4507	WINDOW PANEL W/ PUSH CLICKER	1
9	ZZCH4516	WHIMSY WHEEL PANEL	1
10	ZZCH4528	GARDEN PANEL (GROUND LEVEL)	1
	Audible Acti	vities	
11	ZZCH4409	ACCESSIBLE BELL PANEL	1
	Roofs & Arc	hes	
12	ZZCH9846	CABANA ROOF	1
	Additional T	ool & Maintenance Kits	
13	ZZCHGUID	CHALLENGER GUIDELINES	1
14	ZZUN9910	SURFACING WARNING LABEL KIT	1
15	ZZUN9930	PIPE SYSTEMS MAINTENANCE KIT W/ AEROSOL	1

Design Number: FUN-1481C - Compliance and Technical Data

Reference Document: ASTM F1487

Ref. No.	Part No.	Otv.	Description	Unit ASTM Status	Total Weight (lbs)	Pre- Post- Consumer Recycled Content (lbs)	CO2e Footprint (kgs)	Users	Install Hours	Concrete (Yds3)	Active Play Events
			-			(133)					
	ZZCH0029		3.5in OD x 136in STEEL POST W/O CAP	Certified	169.64		216	0	4.00	0.50	0
2	ZZCH0356		3.50in x 88in STEEL POST w/CAP	Certified	59.42		79	0	2.00	0.26	0
3	ZZCH0616	1	SQUARE COATED DECK ASSEMBLY	Certified	54.86		174	3	1.00	0.00	0
4	ZZCH2006	1	TRANSFER STATION (36in DECK)	Certified	145.80		308	2	2.00	0.09	0
5	ZZUN2019	1	APPROACH STEP FOR TRANSFER STATION	Certified	35.83		72	1	1.00	0.04	0
6	ZZCH3127	1	GLIDE SLIDE (36in DECK)	Certified	99.73		374	3	2.00	0.03	1
7	ZZCH4506	1	DOOR PANEL W/ RATTLE KNOBS (GROUND LEVEL)	Certified	25.43		232	2	1.00	0.00	1
8	ZZCH4507	1	WINDOW PANEL W/ PUSH CLICKER	Certified	29.93		195	2	1.00	0.00	1
9	ZZCH4516	1	WHIMSY WHEEL PANEL	Certified	27.83		235	2	1.00	0.00	1
10	ZZCH4528	1	GARDEN PANEL (GROUND LEVEL)	Certified	29.75		229	2	1.00	0.00	1
11	ZZCH4409	1	ACCESSIBLE BELL PANEL	Certified	22.16		211	1	0.50	0.00	1
12	ZZCH9846	1	CABANA ROOF	Certified	76.05		390	0	0.50	0.00	0
13	ZZCHGUID	1	CHALLENGER GUIDELINES	N/A	0.00		1	0	0.25	0.00	0
14	ZZUN9910	1	SURFACING WARNING LABEL KIT	Certified	0.05		1	0	0.25	0.00	0
15	ZZUN9930	1	PIPE SYSTEMS MAINTENANCE KIT W/ AEROSOL	N/A			90				
				Totals:	776.48	112 182	2,805	18	17.50	0.92	6
					349.42 Kg	j 50 Kg 82	Kg 3 I	Metric To	ons	0.70 i	m3

Design Number: FUN-1481C - Compliance and Technical Data

Reference Document: ASTM F1487

				Pre- Post-					
		Uni	t Total	Consumer	CO2e				Active
Ref.		AST	ዛ Weight	Recycled Content	Footprint		Install	Concrete	Play
No. Part No.	Qty. Description	State	ıs (lbs)	(lbs)	(kgs)	Users	Hours	(Yds3)	Events



ASTM F1487

The lay-out for this custom playscape, design number FUN-1481C, has been configured to meet the requirements of the ASTM F1487 standard. In addition, each of the above components listed as "Certified" have been tested and are IPEMA certified. Components listed as "Not Applicable" do not fall within the scope of the ASTM F1487 standard and have not been tested. IPEMA certification can be verified on the IPEMA website, www.ipema.org. In the interest of playground safety, IPEMA provides a Third Party Certification Service which validates compliance.

2010 ADA Standards for Accessible Design

The lay-out was also designed to meet the 2010 Standards published 15-Sep-2010, by the Department of Justice when installed over a properly maintained surfacing material that is in compliance with ASTM F1951 "Accessibility of Surface Systems Under and Around Playground Equipment" as well as ASTM F1292, "Impact Attenuation of Surfacing Materials Within the Use Zone of Playground Equipment", appropriate for the fall height of the structure.

Installation Times

Installation times are based on one experienced installer. A crew of three experienced individuals can perform the installation within the given time, each member working 1/3 of the given hours. [Eg. Installation Time = 30 hours. For a crew of three, each member will work 10 hours on the installation for a total of 30 hours on the project.]

Carbon Footprint

The CO2e (carbon footprint given in Kilograms and Metric Tons) listed above is a measure of the environmental impact this play structure represents from harvesting raw materials to the time it leaves our shipping dock. Playworld Systems nurtures a total corporate culture that is focused on eliminating carbon producing processes and products, reducing our use of precious raw materials, reusing materials whenever possible and recycling materials at every opportunity. Playworld Systems elected to adopt the Publicly Available Specification; PAS 2050 as published by the British Standards Institute and sponsored by Defra and the Carbon Trust. The PAS 2050 has gained international acceptance as a specification that measures the greenhouse gas emissions in services and goods throughout their entire life cycle.

Pre-Consumer Recycle Content

A measurement, in pounds, that qualifies the amount of material that was captured as waste and diverted from landfill during an initial manufacturing process and is being redirected to a separate manufacturing process to become a different product. E.g. 100% of our Aluminum Tubing is made from captured waste material during the manufacturing process of extruded Aluminum products such as rods, flat bars and H-channels.

Post-Consumer Recycle Content

A measurement, in pounds, that qualifies the amount of material that was once another product that has completed its lifecycle and has been diverted from a landfill as a solid waste through recycling and is now being used in a Playworld Systems' product. E.g. **20% to 40% of the steel in our steel tubing and sheet steel have been diverted from landfills. Automobiles are scrapped and recyclable steel is purchased by the steel mill that produces our raw product. ** The amount of Post-Consumer recycled steel fluctuates daily based on the availability of the recycled steel.




Rock-N-Slide

PSD-1103-FTD

Equipment Manufacturer



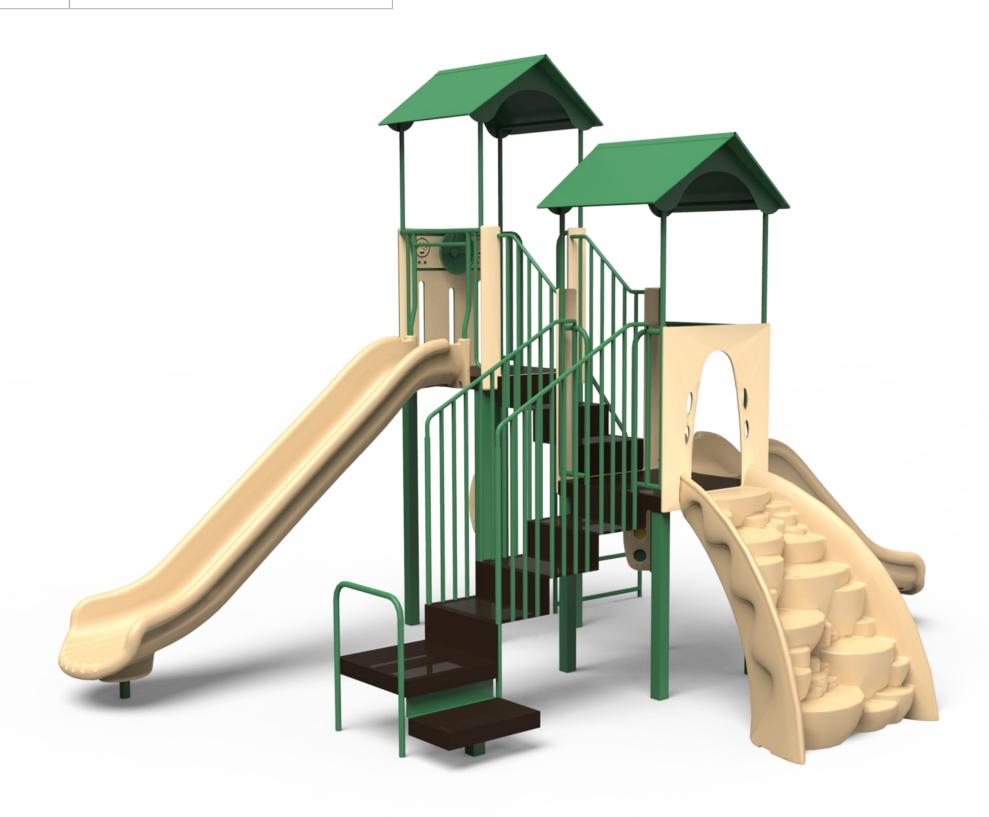


Rock-N-Slide

PSD-1103-FTD

Equipment Manufacturer





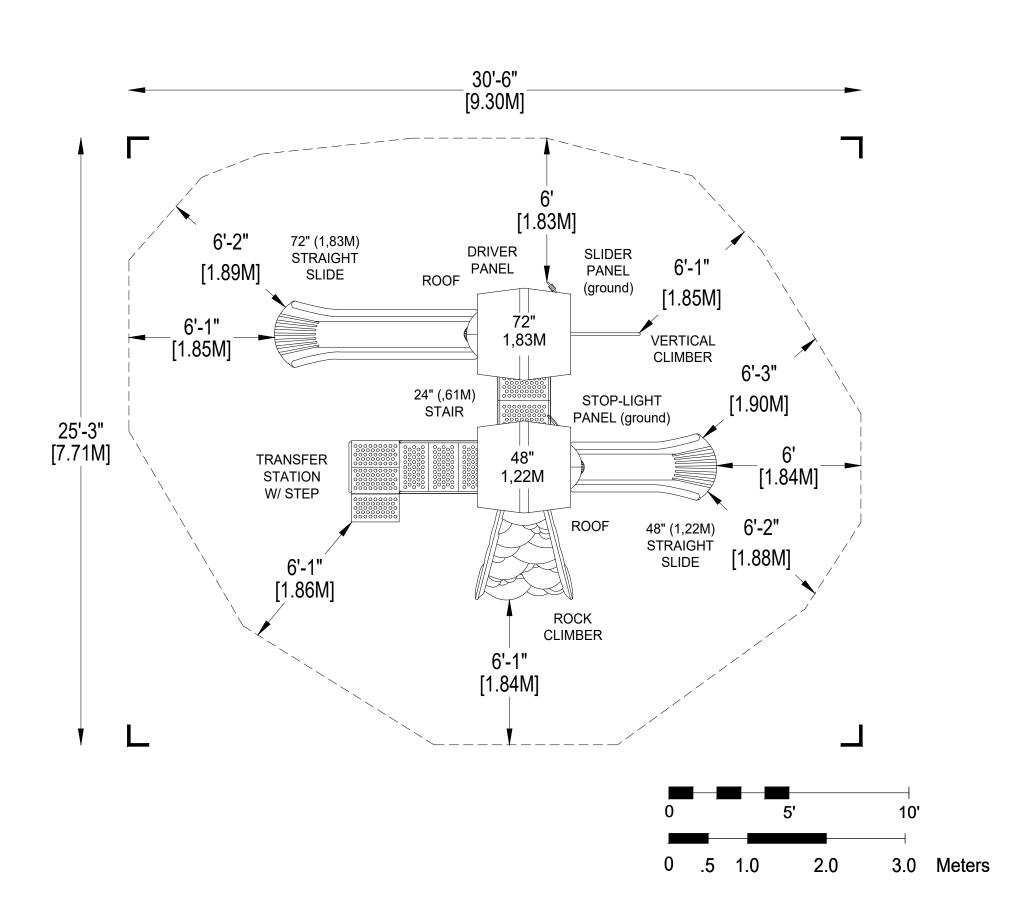



PLAYWORLD SYSTEMS, INC.

1000 Buffalo Road Lewisburg, PA 17837-9795 USA

EQUIPMENT SIZE:

18'6" x 13'3" x 13'0"

5,64M x 4,04M x 3,96M

USE ZONE: **30'6" x 25'3"**

9,30M x 7,71M

AREA: 607 SqFt. PERIMETER: 90 Ft.

56,39 SqM.

27,43M

FALL HEIGHT: 6 Ft.

1,83M

USER CAPACITY:

AGE GROUP: 5-12 19

	E	Total Elevated Play Activities: 5						
	ED	Total Ground	d-Level Play Activ	vities: 2				
	ADA SCHEDULE	Accessible Elevated Activities	Accessible Ground-Level Activities	Accessible Ground-Level Play Types				
Required		3	2	2				
Provided		5	5 2					

✓ ASTM F1487-11

✓ CPSC #325

30-SEP-16




PROJECT NO:	SCALE:
PSD-1103F-FTD	1/4"=1'-0"
DRAWN BY: B. TROUP	Paper Size
DATE:	B

*PLAYGROUND SUPERVISION REQUIRED


DETAIL 1

Support Post, Spiral Slide and RockBlocks Post Footing Detail

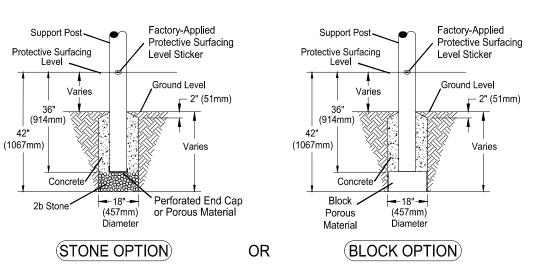

DETAIL 2


GroundZerO. Cantilever and "T" Post Footing Detail

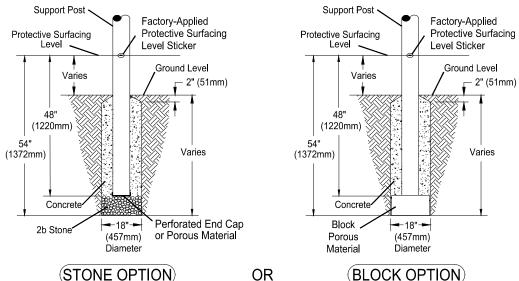

OR


(BLOCK OPTION)

DETAIL 3 Component Footing Detail

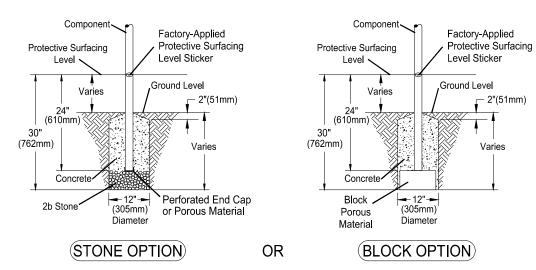

DETAIL 4

Surface Mount Detail

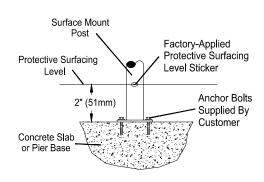

INSTALLATION NOTES:

- 1) Paved surfaces, such as asphalt and concrete, are not acceptable for use under your structure.
- 2) It is the consumer's responsibility to check with local utilities prior to excavating footings for any underground utility lines that may exist within the installation area.
- 3) It is the consumer's responsibility to check local soil conditions and drainage within the site area. Inquire with local contractors for appropriate recommendations.
- 4) If the structure is to be installed across uneven terrain maintain the support post mark for protective surfacing level at the lowest grade. Adjust other footings accordingly.
- 5) The base of footings must be below frost lines.
- 6) Do not encase the bottom of support posts in concrete. Place all posts directly on packed stone.
- 7) Assemble the entire structure before pouring concrete unless specifically instructed to do so in the individual component installation instructions.
- 8) Read completely the installation instructions provided with your structure prior to beginning construction.

SITE NOTES:

- 1) The site plan provided must be checked against the actual site area to ensure that placement of your structure meets required clearances.
- 2) The dimensions labeled are for location of footing holes, not exact placement of equipment. Assemble, plumb, and level equipment before pouring concrete.
- 3) There must be a minimum distance of 6' (1830mm) between any obstacle, sidewalk, etc., and your structure.
- 4) Slides must have a use zone that extends out from the lower exit section of the slide a distance that is at least 6' (1830mm) or equal to the vertical distance from the highest point of the sliding surface to the top of the protective surfacing, whichever is greater. The slide use zone should not extend greater than 8' (2438mm) from the end of the lower exit section
- 5) The complete area, including the space under and around the equipment, must be covered with an impact attenuating material. See the 1997 publication, "Handbook for Public Playground Safety" published by the U.S. Consumer Product Safety Commission, for guidelines and recommendations on the type and depth of surfacing material. For a copy of the "Handbook for Public Playground Safety" write to: U.S. Consumer Product Safety Commission Office of Information and Public Affairs


Washington, D.C. 20207 6) Supervise children as they play

⇒ PLAYWORLD*

PLAYWORLD SYSTEMS, INC.

1000 Buffalo Road Lewisburg, PA 17837-9795 USA

FOOTING LEGEND



COMPONENT FOOTING (DETAIL 3)



SPIRAL SLIDE CENTER POST FOOTING (DETAIL1)



SUPPORT POST FOOTING (DETAIL 1 or 4) (112" INDICATES POST LENGTH)



CANTILEVER, "T" POST, AND COMPONENT POST FOOTING (DETAIL 2) (ZZCH1850 INDICATES PART NUMBER)



GROUND ZERO POST FOOTING (DETAIL 2) (144" INDICATES POST LENGTH)

FOOTING DETAIL

SCALE: NOT TO SCALE

DRAWN BY: **TECH SALES**

28-JUNE-13

Paper Size


В

*PLAYGROUND SUPERVISION REQUIRED

CHALLENGERS **PLAYMAKERS** F0

CATALOG PRE-DESIGN

ROCK-N-SL



> PLAYWORLD

COMPONENT FOOTING (DETAIL 3)



SPIRAL SLIDE CENTER POST FOOTING (DETAIL1)



SUPPORT POST FOOTING (DETAIL 1 or 4) (112" INDICATES POST LENGTH)



CANTILEVER, "T" POST, AND COMPONENT POST FOOTING (DETAIL 2) (ZZCH1850 INDICATES PART NUMBER)



GROUND ZERO POST FOOTING (DETAIL 2) (144" INDICATES POST LENGTH)

PROJECT NO:
PSD-1103F-FTD


SCALE: 1/4"=1'-0"

DRAWN BY: B. TROUP

Paper Size

DATE: **30-SEP-16**

В

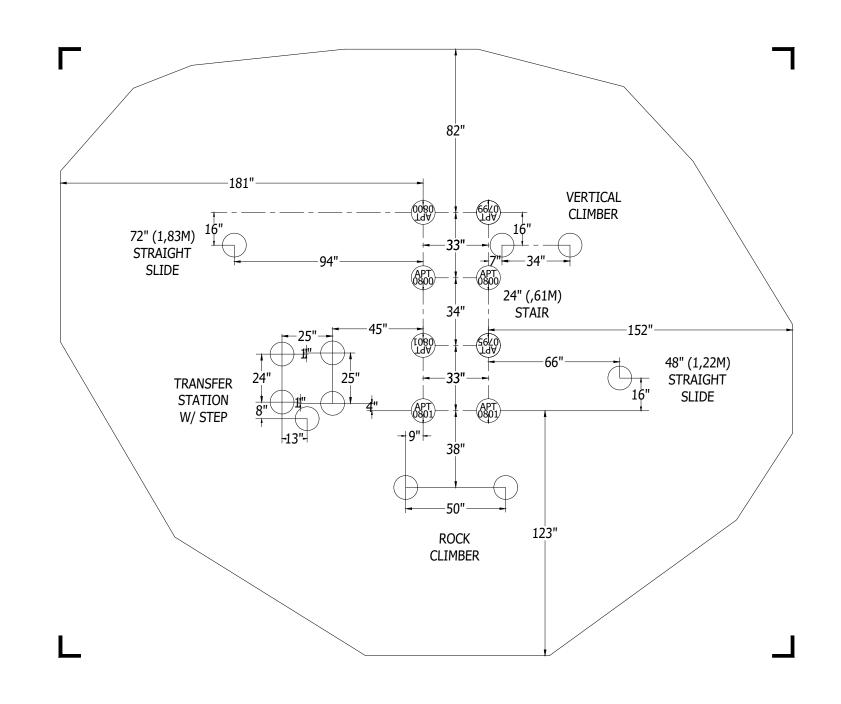

Rock-N-Slide - FTD

Design Number: PSD-1103F-FTD - Bill Of Material

Ref.

No.	Part No.	Description	Quantity
1	ZZEL0001	PLAY SIMPLE MODULE #1	1
2	ZZEL0002	PLAY SIMPLE MODULE #2	1
3	ZZEL0005	PLAY SIMPLE MODULE #1 FOOTING KIT	1
4	77FI 0006	PLAY SIMPLE MODULE #2 & #4 FOOTING KIT	1

Rock-N-Slide - FTD

Design Number: PSD-1103F-FTD - Compliance and Technical Data

Reference Document: ASTM F1487

Ref. No.	Part No.	Qty.	Description	Unit ASTM Status	Total Weight (lbs)	Pre- P Consume Recycled Cor (Ibs)		CO2e Footprint (kgs)	Users	Install Hours	Concrete (Yds3)	Active Play Events
1	ZZEL0001	1	PLAY SIMPLE MODULE #1	Certified	851.00			2,090	10	4.50	0.00	4
2	ZZEL0002	1	PLAY SIMPLE MODULE #2	Certified	643.00			1,672	9	4.50	0.00	3
3	ZZEL0005	1	PLAY SIMPLE MODULE #1 FOOTING KIT	Certified	79.65			105	0	5.50	0.50	0
4	ZZEL0006	1	PLAY SIMPLE MODULE #2 & #4 FOOTING KIT	Certified	47.38			65	0	3.50	0.32	0
				Totals:	1,621.03	363	639	3,933	19	18.00	0.82	7
					729.46 K	a 163 Ka	288	Ka 4 1	Metric To	ons	0.62	m3

Rock-N-Slide - FTD

Design Number: PSD-1103F-FTD - Compliance and Technical Data

Reference Document: ASTM F1487

				Pre- Post-					
		Unit	Total	Consumer	CO2e				Active
Ref.		ASTM	Weight	Recycled Content	Footprint		Install	Concrete	Play
No. Part No. Q	ty. Description	Status	(lbs)	(lbs)	(kgs)	Users	Hours	(Yds3)	Events



ASTM F1487

The lay-out for this custom playscape, design number PSD-1103F-FTD, has been configured to meet the requirements of the ASTM F1487 standard. In addition, each of the above components listed as "Certified" have been tested and are IPEMA certified. Components listed as "Not Applicable" do not fall within the scope of the ASTM F1487 standard and have not been tested. IPEMA certification can be verified on the IPEMA website, www.ipema.org. In the interest of playground safety, IPEMA provides a Third Party Certification Service which validates compliance.

2010 ADA Standards for Accessible Design

The lay-out was also designed to meet the 2010 Standards published 15-Sep-2010, by the Department of Justice when installed over a properly maintained surfacing material that is in compliance with ASTM F1951 "Accessibility of Surface Systems Under and Around Playground Equipment" as well as ASTM F1292, "Impact Attenuation of Surfacing Materials Within the Use Zone of Playground Equipment", appropriate for the fall height of the structure.

Installation Times

Installation times are based on one experienced installer. A crew of three experienced individuals can perform the installation within the given time, each member working 1/3 of the given hours. [Eg. Installation Time = 30 hours. For a crew of three, each member will work 10 hours on the installation for a total of 30 hours on the project.]

Carbon Footprint

The CO2e (carbon footprint given in Kilograms and Metric Tons) listed above is a measure of the environmental impact this play structure represents from harvesting raw materials to the time it leaves our shipping dock. Playworld Systems nurtures a total corporate culture that is focused on eliminating carbon producing processes and products, reducing our use of precious raw materials, reusing materials whenever possible and recycling materials at every opportunity. Playworld Systems elected to adopt the Publicly Available Specification; PAS 2050 as published by the British Standards Institute and sponsored by Defra and the Carbon Trust. The PAS 2050 has gained international acceptance as a specification that measures the greenhouse gas emissions in services and goods throughout their entire life cycle.

Pre-Consumer Recycle Content

A measurement, in pounds, that qualifies the amount of material that was captured as waste and diverted from landfill during an initial manufacturing process and is being redirected to a separate manufacturing process to become a different product. E.g. 100% of our Aluminum Tubing is made from captured waste material during the manufacturing process of extruded Aluminum products such as rods, flat bars and H-channels.

Post-Consumer Recycle Content

A measurement, in pounds, that qualifies the amount of material that was once another product that has completed its lifecycle and has been diverted from a landfill as a solid waste through recycling and is now being used in a Playworld Systems' product. E.g. **20% to 40% of the steel in our steel tubing and sheet steel have been diverted from landfills. Automobiles are scrapped and recyclable steel is purchased by the steel mill that produces our raw product. ** The amount of Post-Consumer recycled steel fluctuates daily based on the availability of the recycled steel.

