Upper Sash

1 7/16" (36)

3 1/4" 4 27/32" (83)

Head Jamb and Sill

Scale: 3" = 1' 0"

MARVIN SIGNATURE® ULTIMATE

Clad Color Options

Our low maintenance clad-wood products feature an extruded aluminum exterior finishe paint. Because our finish meets the toughest American Architectural Manufacturers Asso richest and boldest hues to resist fading and chalking even in harsh sun or extreme weat muted, earthy tones to bold, rich colors and three pearlescent finishes. Custom color ma

The American Architectural Manufacturers Association (AAMA) awards certifications to m simulate the harsh conditions that a finish will encounter throughout the life of the windo AAMA verification provides independent verification that our finishes are best-in-class.





UDHG2 - 25

Ver 2019.3 2019-06-24

Single Hung

Double Hung

Lower Sash

Lower Sash Upper Sash

3 1/4" 4 27/32" (83)


19972255 Marvin Architectural Detail Manual

Existing House and New Addition: Marvin Ultimate Windows and Doors







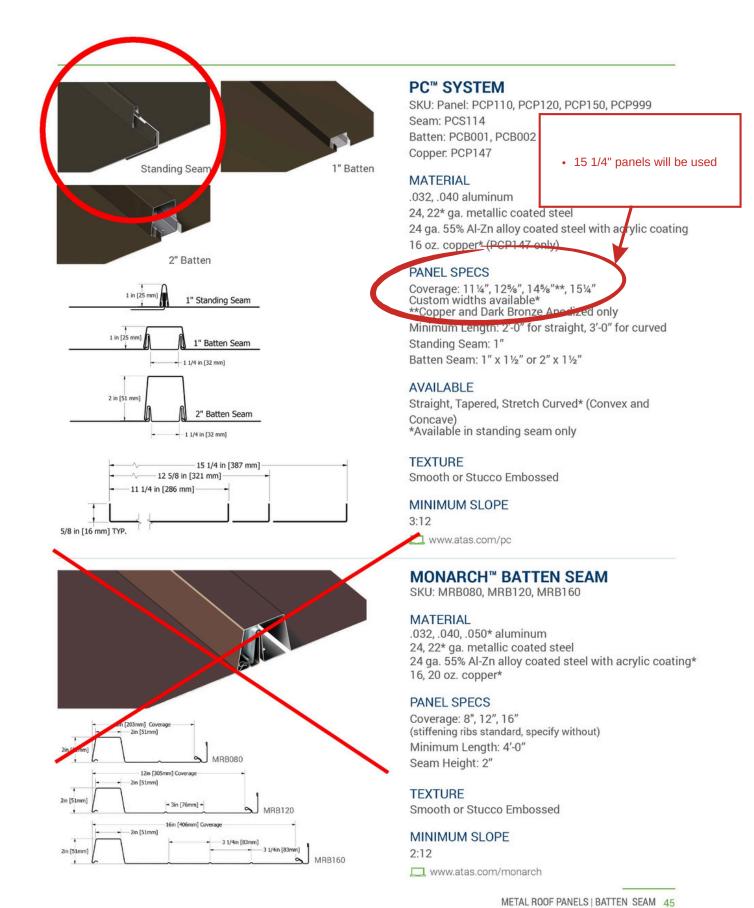

CHAR BROWN

Reference Number: 29

SRI: 20 **TSR:** 0.24

MATERIALS AVAILABILITY


REQUEST COLOR SAMPLES

New Addition: Standing Seam Roof

16 LoE3-340 Hurricane* 29 Triple Pane"


99 Special

*FCM and VCM only

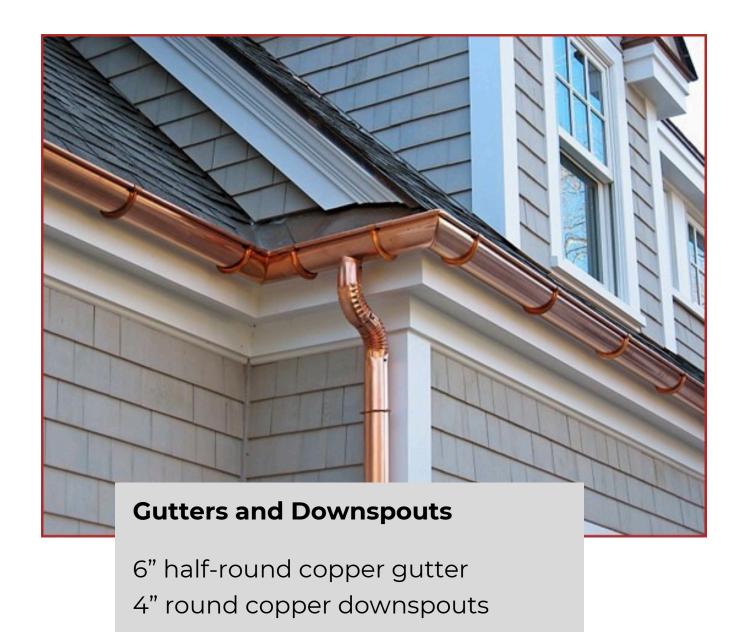



Curb-Mounted Skylights

Size Chart and Codes

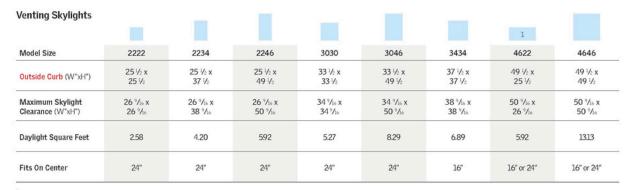

Only available in VCS.

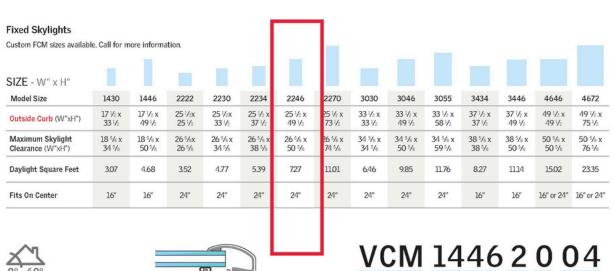

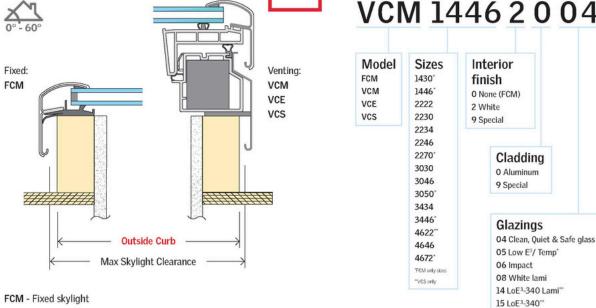

VCM - Manual venting skylight

VCE - Electric venting skylight

VCS - Solar Powered "Fresh Air" skylight

Existing House and Additions: Copper Gutters and Velux Skylights



5W2840 Hammered Silver

Existing HouseSiding



5W7069 Iron Ore

New and Existing House All Trim



Specifications: LP® SmartSide® Trim

BRUSHED SMOOTH TRIM

SMOOTH APPEARANCE, ADVANCED DURABILITY OF ENGINEERED WOOD

- Helps protect against moisture intrusion, impacts from hail, and damage from freeze/thaw cycles
- Treated with the SmartGuard® process for superior protection against many weather conditions and resistance to termites and fungal decay
- 16' length can result in faster installation and fewer seams
- · Primed for exceptional paint adhesion
- · Backed by an industry-leading 5/50-year limited warranty






Existing House: Lap Siding, Trim, and Brick Veneer




Benchmark Ash Cladding 1×4 T/G (JEM)

INSTALLATION TYPE:	INSTALLATION METHOD:
Visible	Screw
WIDTH:	THICKNESS:
3.7 In	.79 In
PROFILE:	COVERAGE:
T&G	3.5 In
BRAND:	SPECIES:
Benchmark Ash	White Ash
TEXTURE:	COLOR:
Smooth	Brown
MODIFICATION STRENGTH: Intense	FINISH: Unoiled
USE:	APPLICATION:
Exterior, Interior	Cladding
ISE.	ADDI ICATION:

REQUEST A SAMPLE

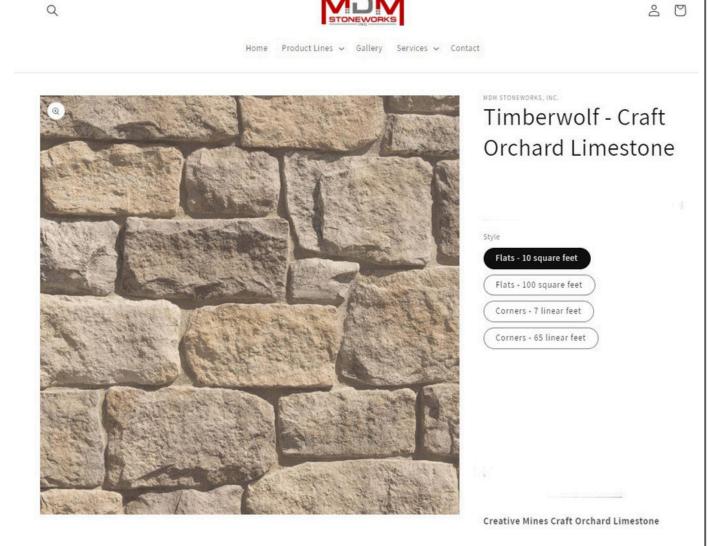

5W7069 Iron Ore

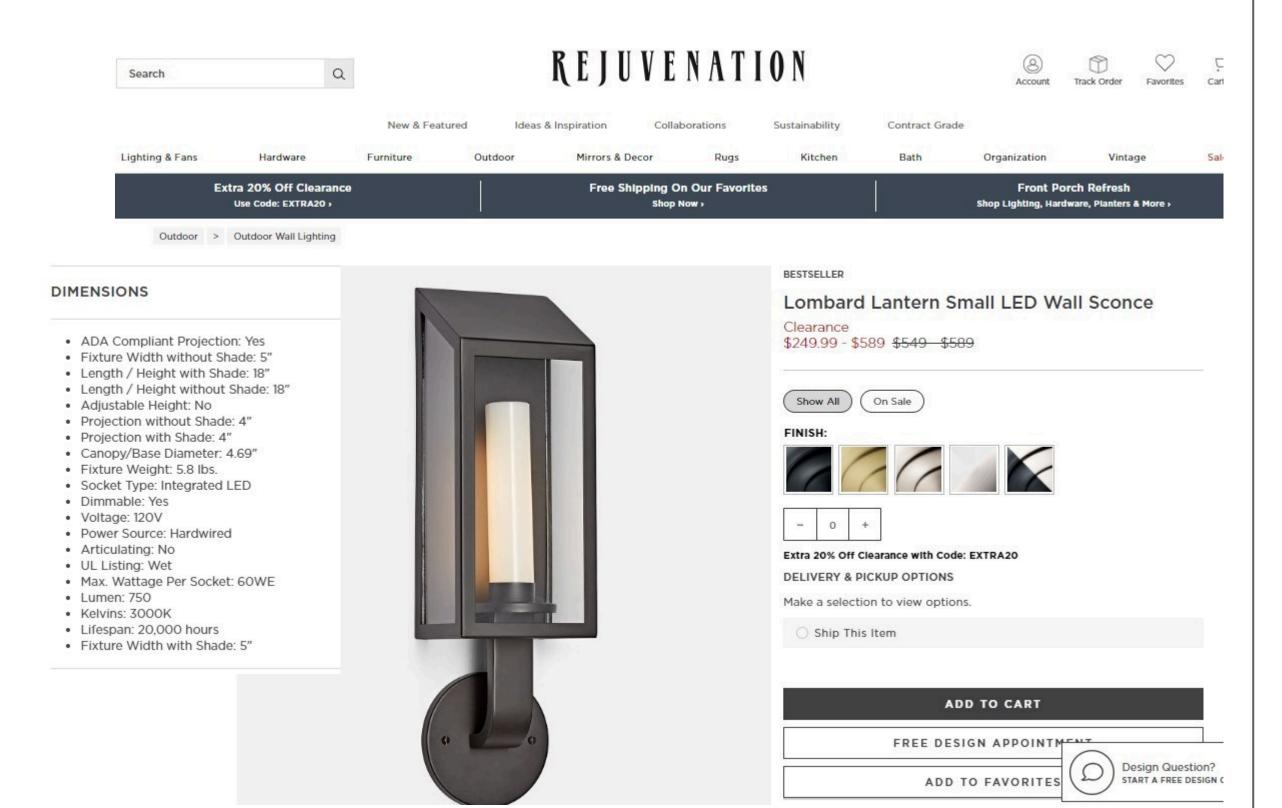

Exterior Light Fixtures




Traditional Overhead Garage Doors

Cladded with Thermally-Modified White Ash Vertical Siding to Match Addition



5W7069 Iron Ore

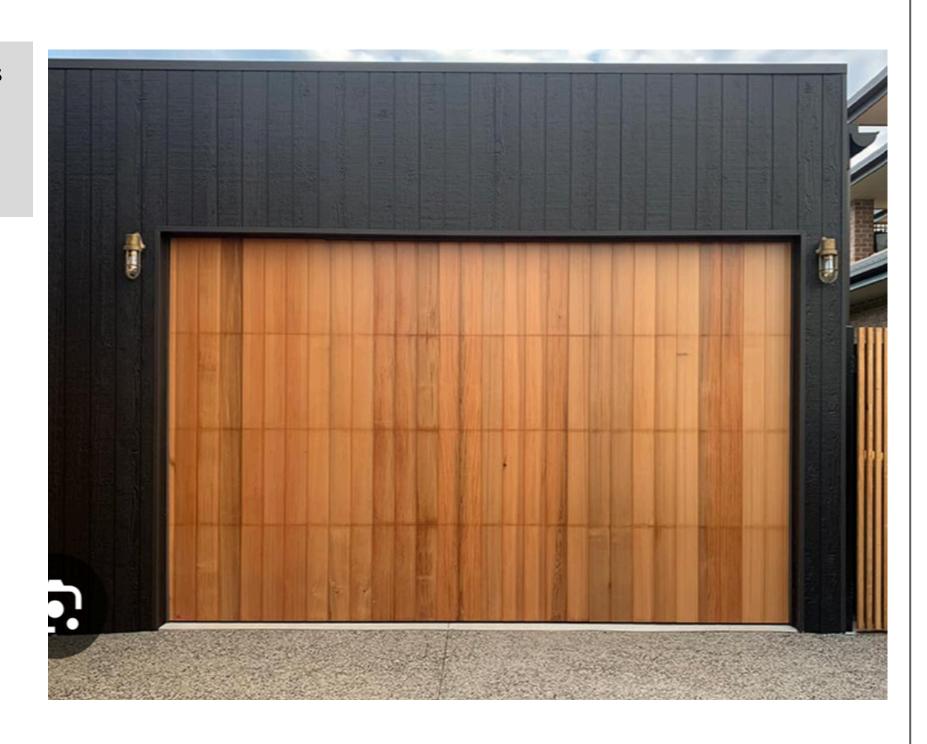



Front and Back Door

Restore Front Door Color Quarterswan Oak

SW2836 Quartersawn Oak

Doors