

1. ALL DIMENSIONS ARE TO FACE OF WALL (UNLESS NOTED OTHERWISE).
SEF TURAL DRAWINGS FOR LOCATIONS OF ALL STEEL
REINFOLDIG IN WALL & FLOOF CONSTRUCTION.
SEE FINISH CONFEDULE FOR ADI ITIONAL INFORMATION OF LOCATIONS AND TYPES OF FINISH MATERIALS.
SEE ELEVATIONS AND STRUCTURAL DRAWINGS FOR LOCATIONS OF

EXPANSION & CONTROL JOINTS CONTRACTOR SHALL PROVIDE ADDITIONAL INTERIOR CONTROL JOINTS AS REQUIRED TO COMPLY AP WITO WAR LUNG PACING REQUIREMENTS IN SPECIFICATIONS AND NATIONAL MASONRY INSTITUTE SEE DETAILS ON AXXX.

CONSTRAINED SELECTRICAL EQUIPMENT SHALL BE ON BPSOISEKEPPLO 40 SPANS AFE TO PROVIDED BY THE TRADE M CURRY IN THE EQUIPMENT. SHE MECHANICAL AND ELECTRICAL MICHAEL IN ORMATION. WORK TO BE 36068 DINATED THROUGH THE GENERAL TRADES CONTRACTOR. 62 PAD3 4/ MIN 4" THICK W/ W.W.F., UNLESS NOTED OTHERWISE).
SEE G SERIES SHEETS FOR WALL TYPE CONSTRUCTION.

PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER FLOOR AT ALL KITCHEN GREASE SHAFT LOCATIONS AND EVERY OTHER FLOOR FOR ALL OTHER SHAFT LOCATIONS. ACCESS PANELS TO FACE THE PUBLIC CORRIDOR SIDE. COORDINATE MOUNTING HEIGHT WITH ARCHITECT IN THE FIELD. DO NOT RUN PIPELINE, CONDUITS OR ANY DEVICES INTO THE SHAFT ASSEMBLIES. SHAFT ASSEMBLIES TO REMAIN FOR THE SOLE

PURPOSE OF THE MECHANICAL DUCTS. 10. ELEVATION 810.00 EQUALS 100'-0" INSTALL FIRE EXTINGUISHER SO THE INTEGRITY OF THE RATED WALL IS MAINTAINED. CONTINUE THE TYPE X GYPSUM BOARD ASSEMBLY 1. BEHIND THE FIRE EXTINGUISHER CABINET. 12. SEE A600 SERIES SHEETS FOR UNIT LAYOUT INFORMATION

ALL WOOD SILL PLATES IN WALLS AT PODIUM LEVEL TO BE PRESSURE EXTERIOR BEARING WALLS TO BE 1 HOUR RATED PER U.L.# U364. 14. REFER TO STRUCTURAL SHEETS FOR BEARING WALL CONDITIONS. 15. COORDINATE SHAFT WALL ALIGNMENT WITH ARCHITECT TO

MAINTAIN REQUIRED RATING IN ADJACENT WALLS. INSTALL 5" DIA. HEADACHE CLEARANCE BARS AT ALL GARAGE ENTRANCES AND EXITS. 16. ALL EXTERIOR BEARING WALLS ARE TO BE 2-HR RATED.

SEE STRUCTURAL DWGS FOR EXTERIOR WALL BEARING CONDITIONS SEE 6/A557 FOR WALL ASSEMBLY DESCRIPTION.

FLOOR PLAN LEGEND

INDICATES PARTITION WITH SOUND ATTENUATION INSULATION. REFER TO THE WALL PARTITION SCHEDULE 1 HR RATED WALL

1 HR RATED WALL 2 HR RATED WALL 3 HR RATED FIRE WALL

2HR SHAFT WALL UNLESS NOTED OTHERWISE, SEE G SERIES SHEETS FOR WALL TYPE SCHEDULE, RATED ASSEMBLIES AND A600 SERIES SHEETS FOR INTERIOR DETAILS. SHAFT WALL ASSEMBLY TO BE CONTINOUS AND THROUGH THE ROOF. WALL ASSEMBLY TO GO THROUGH THE PODIUM EXCEPT AT SUPPLY AND RETURN AIR FOR RESIDENTIAL CORRIDORS. PROVIDE A HORIZONTAL SHAFT WALL ASSEMBLY AT THE BOTTOM OF THE SHAFT. SEE THE GENERAL NOTES ON THIS SHEET FOR ACCESS PANEL REQUIREMENTS AT SHAFT ENCLOSURE. SEE THE SHAFT ASSEMBLY VERTICAL DETAILS. **PLAN ELEVATION**

PARCEL BOX
LINE INDICATES ORIENTATION OF KEYHOLE FOR FOR ANSI COMPLIANCE

SEMI-RECESSED FIRE EXTINGUISHER CABINET. INSTALL FIRE EXTINGUISHER SO THAT THE INTEGRITY OF RATED WALL IS MAINTANED. CONTINUE TYPE X GYP BOARD ASSEMBLY BEHIND FIRE EXTINGUISHER CABINET. UNIT SHALL NOT ENCROACH MORE THAN 4" INTO THE PATH OF EGRESS.

PORTABLE FIRE EXTINGUISHER

HEARING IMPAIRED UNIT, SEE MEP INFORMATION FOR ADDITIONAL REQUIREMENTS. SEE CODE FLOOR PLANS FOR LOCATIONS

TYPE A FULLY ACCESSIBLE UNIT. SEE CODE FLOOR PLANS FOR LOCATIONS

REQUIRED 30"X48" WHEELCHAIR CLEARANCE. 48" SHALL BE CENTERED AT SINKS AND KITCHEN RANGE 2'-10" MAXIMUM HEIGHT TO THE TOP OF THE KITCHEN OR BATHROOM SINK RIM. TYP. AT PUBLIC AREAS & TYPE A

ELECTRIC FIRE PLACE AND GYPSUM BOARD SURROUND TYP. AT ALL 1, 2 AND 3-BEDROOM PENTHOUSE UNITS U.N.O.

> VTAC FLOOR PLAN DIAGRAM (VTAC UNIT TO BE INSTALLED AT TYPICAL RESIDENTIAL LEVELS. AT PENTHOUSE LEVEL ONLY, LOCATE CLOSET AND DOOR

IN LIEU OF VTAC UNIT) TYPICAL ACCESS PANEL LOCATION FOR MECHANICAL UNIT. ACCESS PANEL TO BE PAINTED TO MATCH ADJACENT WALL

KEY PLAN

CHANGE DESCRIPTION # DATE 8 9-8-15 Addendum #2 C4

13 | 3-28-16 | C4-Bulletin #3 20 06-24-16 Bulletin 7-C4 22 | 07-08-16 | Bulletin 8-C4 28 | 10-04-16 | Bulletin 15-C4

BRIDGE PARK BUILDING C4 6640 MOONEY ST. DUBLIN, OHIO 43017



MOODY•NOLAN

Phone: (614) 461-4664


Fax: (614) 280-8881

RESPONSIVE ARCHITECTURE

EXP. DATE: 12/31/2017 Dwg. Coord.: Author Tech. Coord.: Checker 14145

LEVEL 2 OVERALL FLOOR PLAN GMP / PERMIT SET

A121 08-03-2015

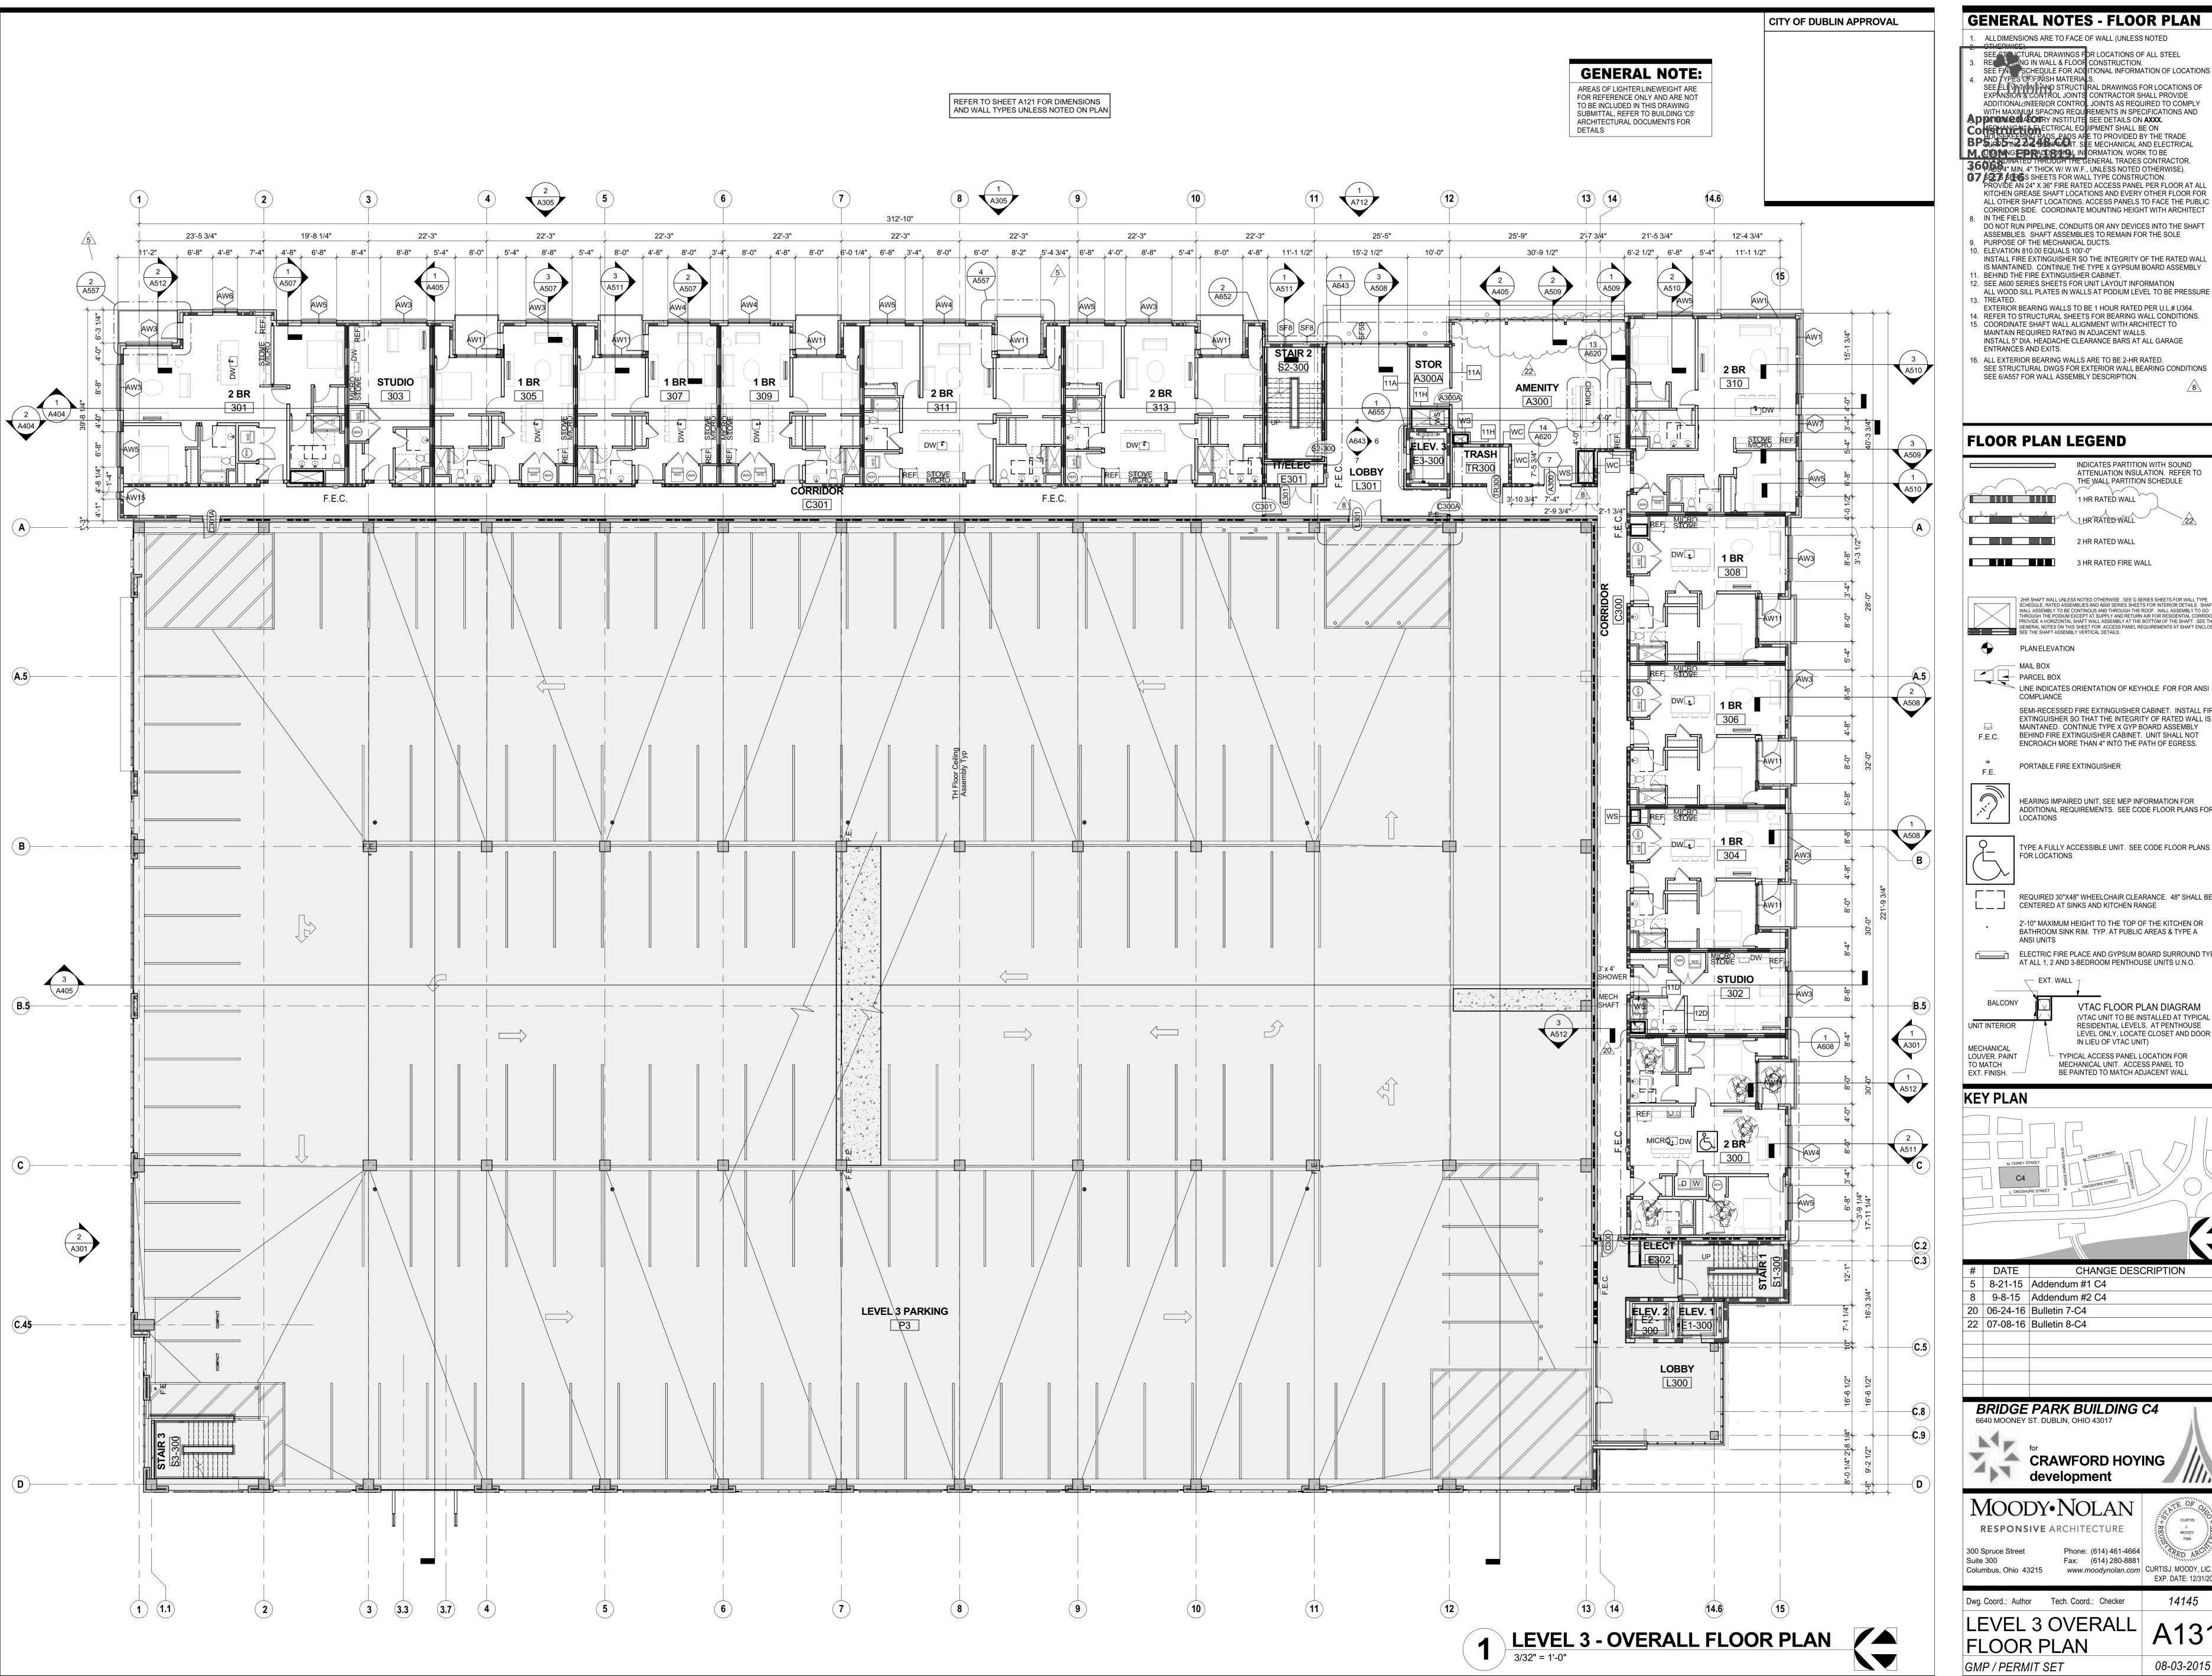

1. ALL DIMENSIONS ARE TO FACE OF WALL (UNLESS NOTED SEE ST. UCTURAL DRAWINGS FOR LOCATIONS OF ALL STEEL RECORD IN WALL & FLOOF CONSTRUCTION.
SEE FAIL SCHEDULE FOR ADDITIONAL INFORMATION OF LOCATIONS

AND TYPES OF FINISH MATERIALS.

SEE ELI VATIONS AND STRUCTURAL DRAWINGS FOR LOCATIONS OF EXPANSION & CONTROL JOINTS CONTRACTOR SHALL PROVIDE ADDITIONAL INTERIOR CONTRO. JOINTS AS REQUIRED TO COMPLY WITH MAXIMUM SPACING REQUIREMENTS IN SPECIFICATIONS AND ADDITION ASSOCIATION INSTITUTE SEE DETAILS ON AXXX.

0.7 SEE SHEETS FOR WALL TYPE CONSTRUCTION.
PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER FLOOR AT ALL KITCHEN GREASE SHAFT LOCATIONS AND EVERY OTHER FLOOR FOR ALL OTHER SHAFT LOCATIONS. ACCESS PANELS TO FACE THE PUBLIC CORRIDOR SIDE. COORDINATE MOUNTING HEIGHT WITH ARCHITECT

IN THE FIELD. DO NOT RUN PIPELINE, CONDUITS OR ANY DEVICES INTO THE SHAFT ASSEMBLIES. SHAFT ASSEMBLIES TO REMAIN FOR THE SOLE

PURPOSE OF THE MECHANICAL DUCTS. 10. ELEVATION 810.00 EQUALS 100'-0" INSTALL FIRE EXTINGUISHER SO THE INTEGRITY OF THE RATED WALL IS MAINTAINED. CONTINUE THE TYPE X GYPSUM BOARD ASSEMBLY 11. BEHIND THE FIRE EXTINGUISHER CABINET.

ALL WOOD SILL PLATES IN WALLS AT PODIUM LEVEL TO BE PRESSURE EXTERIOR BEARING WALLS TO BE 1 HOUR RATED PER U.L.# U364. 14. REFER TO STRUCTURAL SHEETS FOR BEARING WALL CONDITIONS.

15. COORDINATE SHAFT WALL ALIGNMENT WITH ARCHITECT TO MAINTAIN REQUIRED RATING IN ADJACENT WALLS. INSTALL 5" DIA. HEADACHE CLEARANCE BARS AT ALL GARAGE ENTRANCES AND EXITS.

16. ALL EXTERIOR BEARING WALLS ARE TO BE 2-HR RATED. SEE STRUCTURAL DWGS FOR EXTERIOR WALL BEARING CONDITIONS SEE 6/A557 FOR WALL ASSEMBLY DESCRIPTION.

FLOOR PLAN LEGEND

INDICATES PARTITION WITH SOUND ATTENUATION INSULATION. REFER TO THE WALL PARTITION SCHEDULE

1 HR RATED WALL 1 HR RATED WALL

3 HR RATED FIRE WALL

2HR SHAFT WALL UNLESS NOTED OTHERWISE, SEE G SERIES SHEETS FOR WALL TYPE SCHEDULE, RATED ASSEMBLIES AND A600 SERIES SHEETS FOR INTERIOR DETAILS. SHAFT WALL ASSEMBLY TO BE CONTINOUS AND THROUGH THE ROOF. WALL ASSEMBLY TO GO THROUGH THE PODIUM EXCEPT AT SUPPLY AND RETURN AIR FOR RESIDENTIAL CORRIDORS. PROVIDE A HORIZONTAL SHAFT WALL ASSEMBLY AT BOTTOM OF THE SHAFT. SEE THE GENERAL NOTES ON THIS SHEET FOR ACCESS PANEL REQUIREMENTS AT SHAFT ENCLOSURE. SEE THE SHAFT ASSEMBLY VERTICAL DETAILS.

PLAN ELEVATION

LINE INDICATES ORIENTATION OF KEYHOLE FOR FOR ANSI COMPLIANCE

SEMI-RECESSED FIRE EXTINGUISHER CABINET. INSTALL FIRE EXTINGUISHER SO THAT THE INTEGRITY OF RATED WALL IS MAINTANED. CONTINUE TYPE X GYP BOARD ASSEMBLY BEHIND FIRE EXTINGUISHER CABINET. UNIT SHALL NOT ENCROACH MORE THAN 4" INTO THE PATH OF EGRESS.

PORTABLE FIRE EXTINGUISHER

HEARING IMPAIRED UNIT, SEE MEP INFORMATION FOR ADDITIONAL REQUIREMENTS. SEE CODE FLOOR PLANS FOR

REQUIRED 30"X48" WHEELCHAIR CLEARANCE. 48" SHALL BE CENTERED AT SINKS AND KITCHEN RANGE 2'-10" MAXIMUM HEIGHT TO THE TOP OF THE KITCHEN OR BATHROOM SINK RIM. TYP. AT PUBLIC AREAS & TYPE A

ELECTRIC FIRE PLACE AND GYPSUM BOARD SURROUND TYP. AT ALL 1, 2 AND 3-BEDROOM PENTHOUSE UNITS U.N.O.

VTAC FLOOR PLAN DIAGRAM (VTAC UNIT TO BE INSTALLED AT TYPICAL

RESIDENTIAL LEVELS. AT PENTHOUSE LEVEL ONLY, LOCATE CLOSET AND DOOR IN LIEU OF VTAC UNIT)

- TYPICAL ACCESS PANEL LOCATION FOR MECHANICAL UNIT. ACCESS PANEL TO BE PAINTED TO MATCH ADJACENT WALL

KEY PLAN

CHANGE DESCRIPTION

8-21-15 | Addendum #1 C4 8 9-8-15 Addendum #2 C4 20 06-24-16 Bulletin 7-C4 22 07-08-16 Bulletin 8-C4

BRIDGE PARK BUILDING C4



development


MOODY•NOLAN RESPONSIVE ARCHITECTURE

Phone: (614) 461-4664 Fax: (614) 280-8881 Columbus, Ohio 43215 www.moodynolan.com CURTISJ. MOODY, LIC. #7066

EXP. DATE: 12/31/2017 Dwg. Coord.: Author Tech. Coord.: Checker 14145

LEVEL 3 OVERALL

A131 08-03-2015

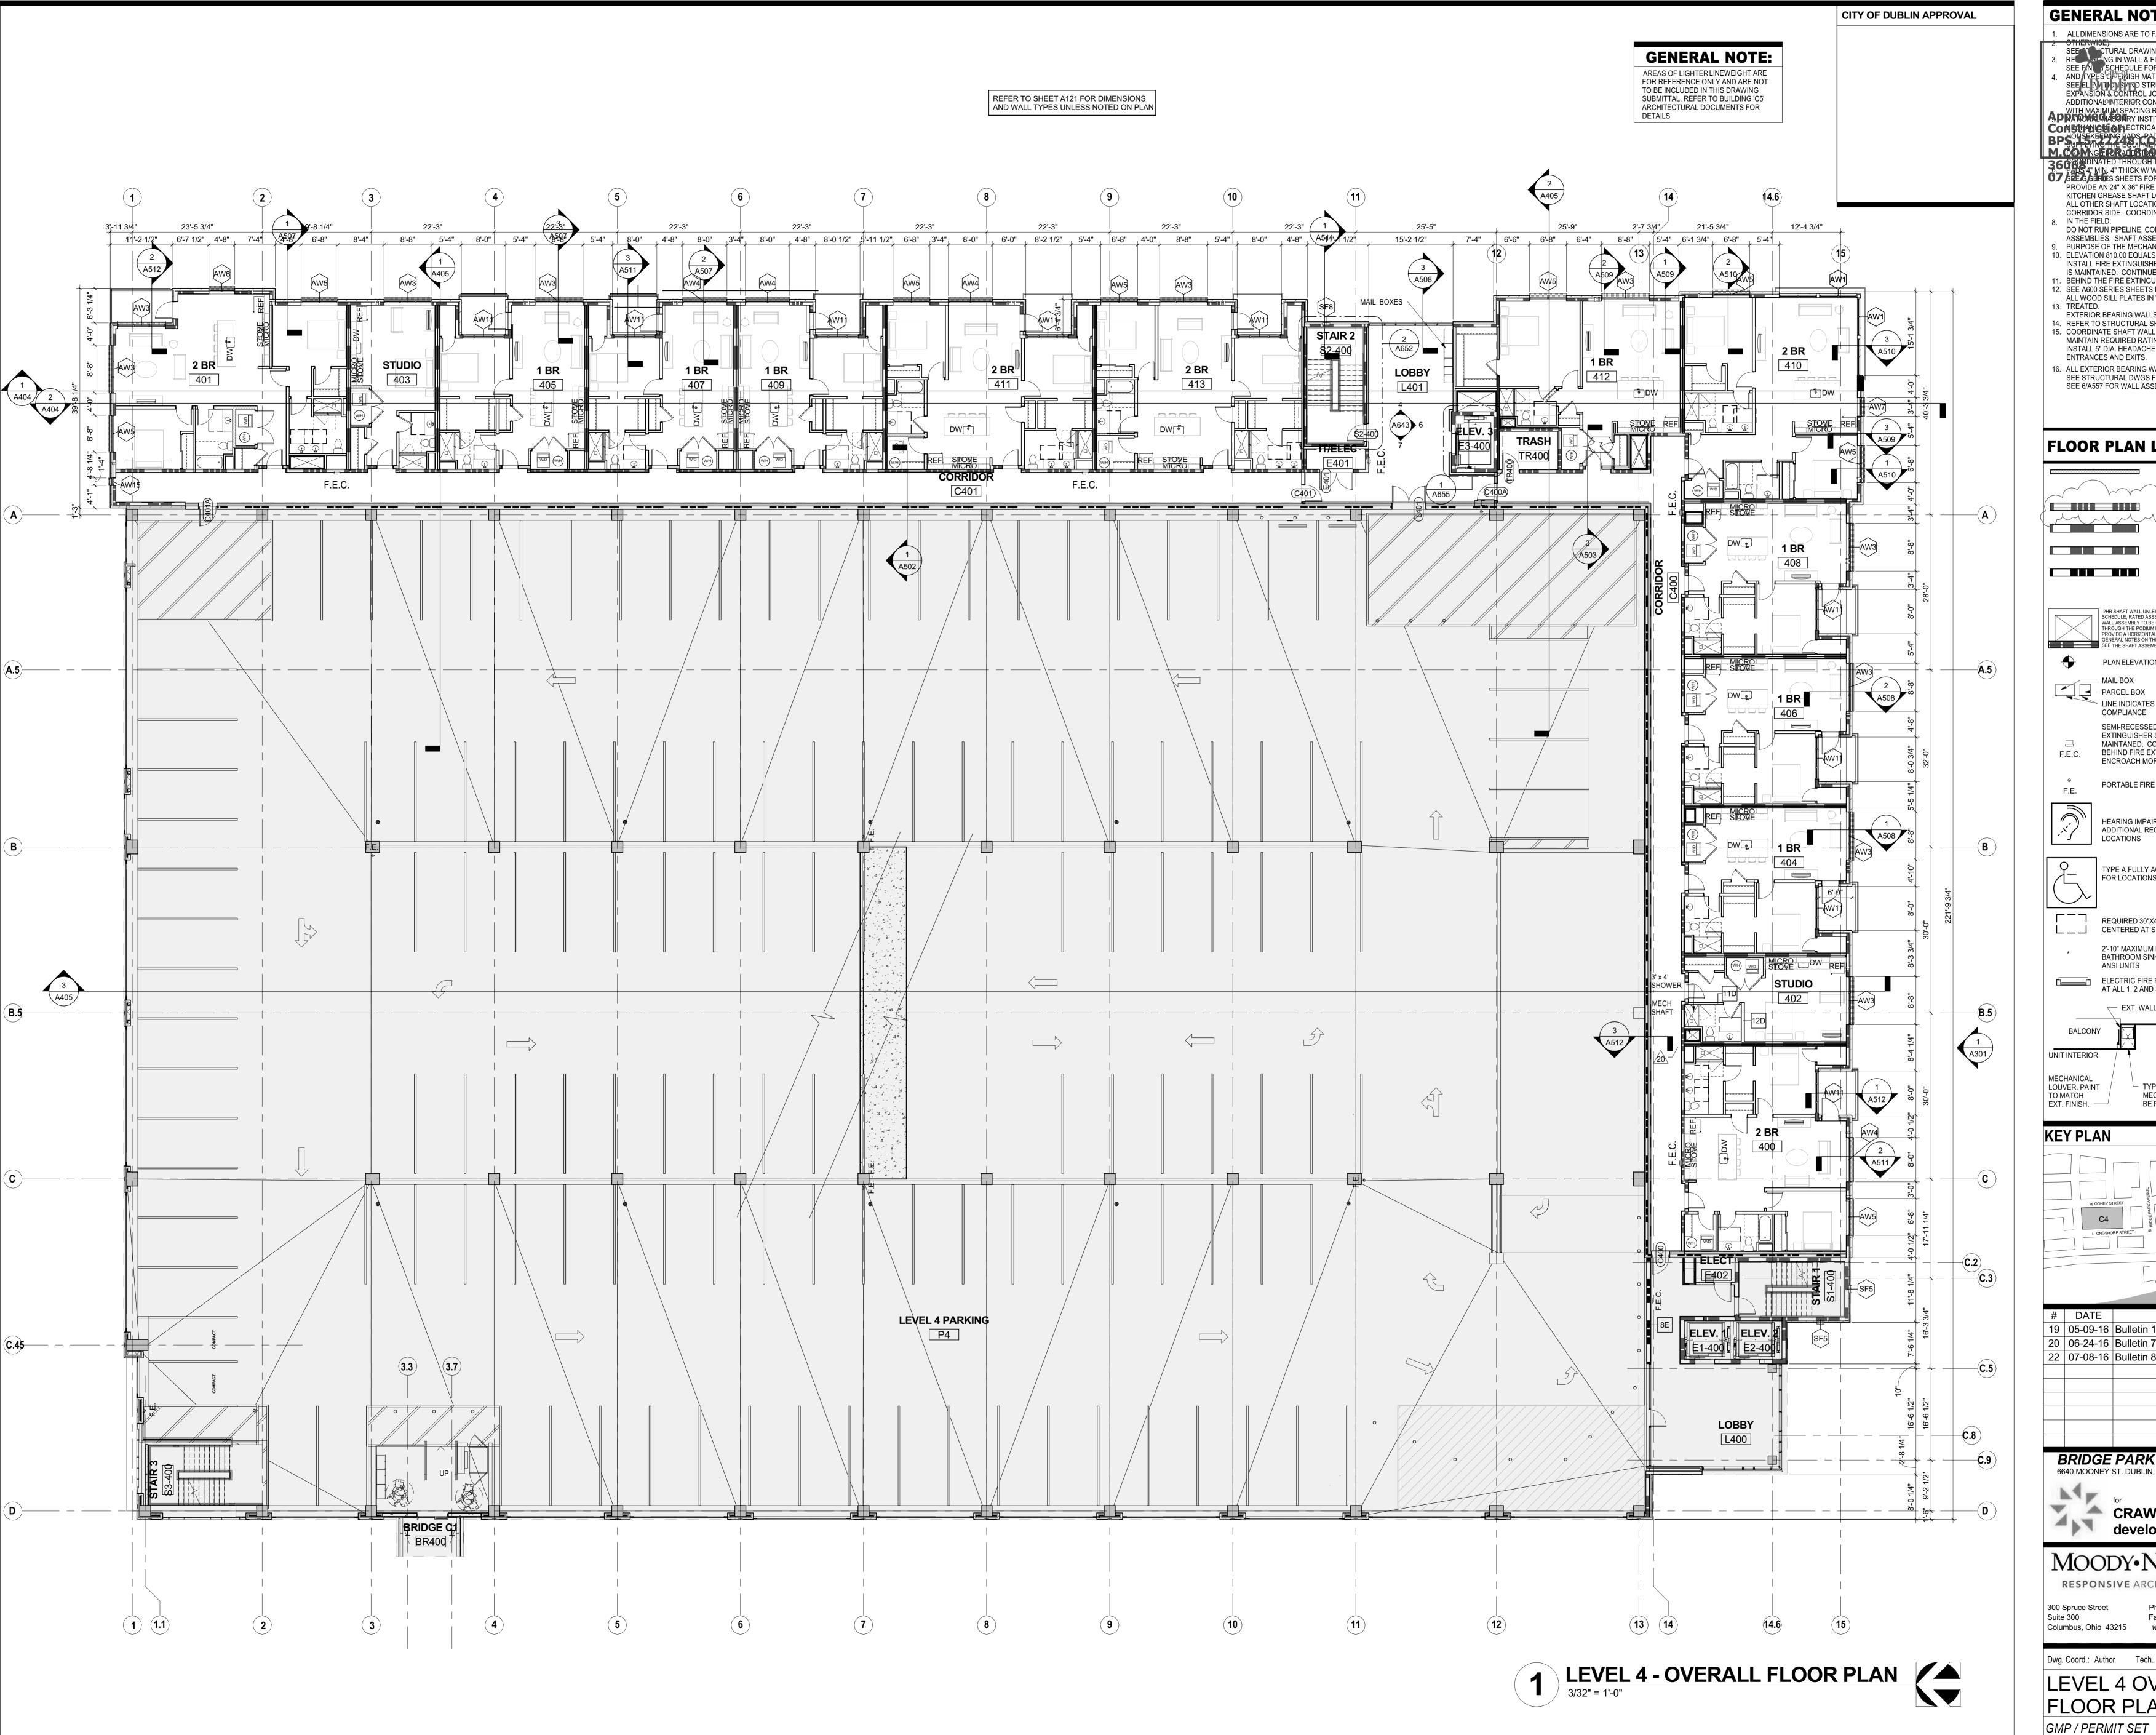

1. ALL DIMENSIONS ARE TO FACE OF WALL (UNLESS NOTED SEE TO ICTURAL DRAWINGS FOR LOCATIONS OF ALL STEEL
RECORD IN WALL & FLOOF CONSTRUCTION.
SEE FINE A SCHEDULE FOR ADDITIONAL INFORMATION OF LOCATIONS

AND TYPES OF FINISH MATERIALS.

SEE EL 19 / TIPPOS AND STRUCTURAL DRAWINGS FOR LOCATIONS OF EXPANSION & CONTROL JOINTS. CONTRACTOR SHALL PROVIDE ADDITIONAL INTERIOR CONTROL JOINTS AS REQUIRED TO COMPLY WITH MAXIMUM SPACING REQUIREMENTS IN SPECIFICATIONS AND APPROXICUATION SPECIFICATION SPE CONSTHANCT & FLECTRICAL EQUIPMENT SHALL BE ON BP JUPPEYING PADS PADS AILE TO PROVIDED BY THE TRADE
BP JUPPEYING THE EQUIPMENT. SEE MECHANICAL AND ELECTRICAL
M. ORAM NGE OR ALDS 100 AL IN FORMATION. WORK TO BE
36 GOOD INTEREST OF THE MENT OF THE

PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER FLOOR AT ALL KITCHEN GREASE SHAFT LOCATIONS AND EVERY OTHER FLOOR FOR ALL OTHER SHAFT LOCATIONS. ACCESS PANELS TO FACE THE PUBLIC CORRIDOR SIDE. COORDINATE MOUNTING HEIGHT WITH ARCHITECT

IN THE FIELD. DO NOT RUN PIPELINE, CONDUITS OR ANY DEVICES INTO THE SHAFT ASSEMBLIES. SHAFT ASSEMBLIES TO REMAIN FOR THE SOLE

. PURPOSE OF THE MECHANICAL DUCTS. 10. ELEVATION 810.00 EQUALS 100'-0" INSTALL FIRE EXTINGUISHER SO THE INTEGRITY OF THE RATED WALL

IS MAINTAINED. CONTINUE THE TYPE X GYPSUM BOARD ASSEMBLY 11. BEHIND THE FIRE EXTINGUISHER CABINET. 12. SEE A600 SERIES SHEETS FOR UNIT LAYOUT INFORMATION ALL WOOD SILL PLATES IN WALLS AT PODIUM LEVEL TO BE PRESSURE

EXTERIOR BEARING WALLS TO BE 1 HOUR RATED PER U.L.# U364. 14. REFER TO STRUCTURAL SHEETS FOR BEARING WALL CONDITIONS. 15. COORDINATE SHAFT WALL ALIGNMENT WITH ARCHITECT TO MAINTAIN REQUIRED RATING IN ADJACENT WALLS. INSTALL 5" DIA. HEADACHE CLEARANCE BARS AT ALL GARAGE

ENTRANCES AND EXITS. 16. ALL EXTERIOR BEARING WALLS ARE TO BE 2-HR RATED. SEE STRUCTURAL DWGS FOR EXTERIOR WALL BEARING CONDITIONS SEE 6/A557 FOR WALL ASSEMBLY DESCRIPTION.

FLOOR PLAN LEGEND

INDICATES PARTITION WITH SOUND ATTENUATION INSULATION. REFER TO THE WALL PARTITION SCHEDULE 1 HR RATED WALL

THR RATED WALL 2 HR RATED WALL

3 HR RATED FIRE WALL

2HR SHAFT WALL UNLESS NOTED OTHERWISE , SEE G SERIES SHEETS FOR WALL TYPE SCHEDULE, RATED ASSEMBLIES AND A600 SERIES SHEETS FOR INTERIOR DETAILS. SHAFT WALL ASSEMBLY TO BE CONTINOUS AND THROUGH THE ROOF. WALL ASSEMBLY TO GO THROUGH THE PODIUM EXCEPT AT SUPPLY AND RETURN AIR FOR RESIDENTIAL CORRIDORS. PROVIDE A HORIZONTAL SHAFT WALL ASSEMBLY AT THE BOTTOM OF THE SHAFT. SEE THE GENERAL NOTES ON THIS SHEET FOR ACCESS PANEL REQUIREMENTS AT SHAFT ENCLOSURE. SEE THE SHAFT ASSEMBLY VERTICAL DETAILS. **PLANELEVATION**

MAIL BOX PARCEL BOX

LINE INDICATES ORIENTATION OF KEYHOLE FOR FOR ANSI COMPLIANCE EXTINGUISHER SO THAT THE INTEGRITY OF RATED WALL IS MAINTANED. CONTINUE TYPE X GYP BOARD ASSEMBLY BEHIND FIRE EXTINGUISHER CABINET. UNIT SHALL NOT ENCROACH MORE THAN 4" INTO THE PATH OF EGRESS.

PORTABLE FIRE EXTINGUISHER

HEARING IMPAIRED UNIT, SEE MEP INFORMATION FOR ADDITIONAL REQUIREMENTS. SEE CODE FLOOR PLANS FOR LOCATIONS

TYPE A FULLY ACCESSIBLE UNIT. SEE CODE FLOOR PLANS FOR LOCATIONS

REQUIRED 30"X48" WHEELCHAIR CLEARANCE. 48" SHALL BE CENTERED AT SINKS AND KITCHEN RANGE 2'-10" MAXIMUM HEIGHT TO THE TOP OF THE KITCHEN OR

BATHROOM SINK RIM. TYP. AT PUBLIC AREAS & TYPE A ELECTRIC FIRE PLACE AND GYPSUM BOARD SURROUND TYP. AT ALL 1, 2 AND 3-BEDROOM PENTHOUSE UNITS U.N.O.

> VTAC FLOOR PLAN DIAGRAM (VTAC UNIT TO BE INSTALLED AT TYPICAL

RESIDENTIAL LEVELS. AT PENTHOUSE LEVEL ONLY, LOCATE CLOSET AND DOOR IN LIEU OF VTAC UNIT) TYPICAL ACCESS PANEL LOCATION FOR

MECHANICAL UNIT. ACCESS PANEL TO BE PAINTED TO MATCH ADJACENT WALL

KEY PLAN

CHANGE DESCRIPTION 19 | 05-09-16 | Bulletin 14 -C5

20 06-24-16 Bulletin 7-C4 22 07-08-16 Bulletin 8-C4

BRIDGE PARK BUILDING C4 6640 MOONEY ST. DUBLIN, OHIO 43017

CRAWFORD HOYING development

MOODY•NOLAN


RESPONSIVE ARCHITECTURE

Phone: (614) 461-4664 Fax: (614) 280-8881 Columbus, Ohio 43215 www.moodynolan.com CURTISJ. MOODY, LIC. #7066 EXP. DATE: 12/31/2017

Dwg. Coord.: Author Tech. Coord.: Checker

14145 LEVEL 4 OVERALL A141 FLOOR PLAN

08-03-2015

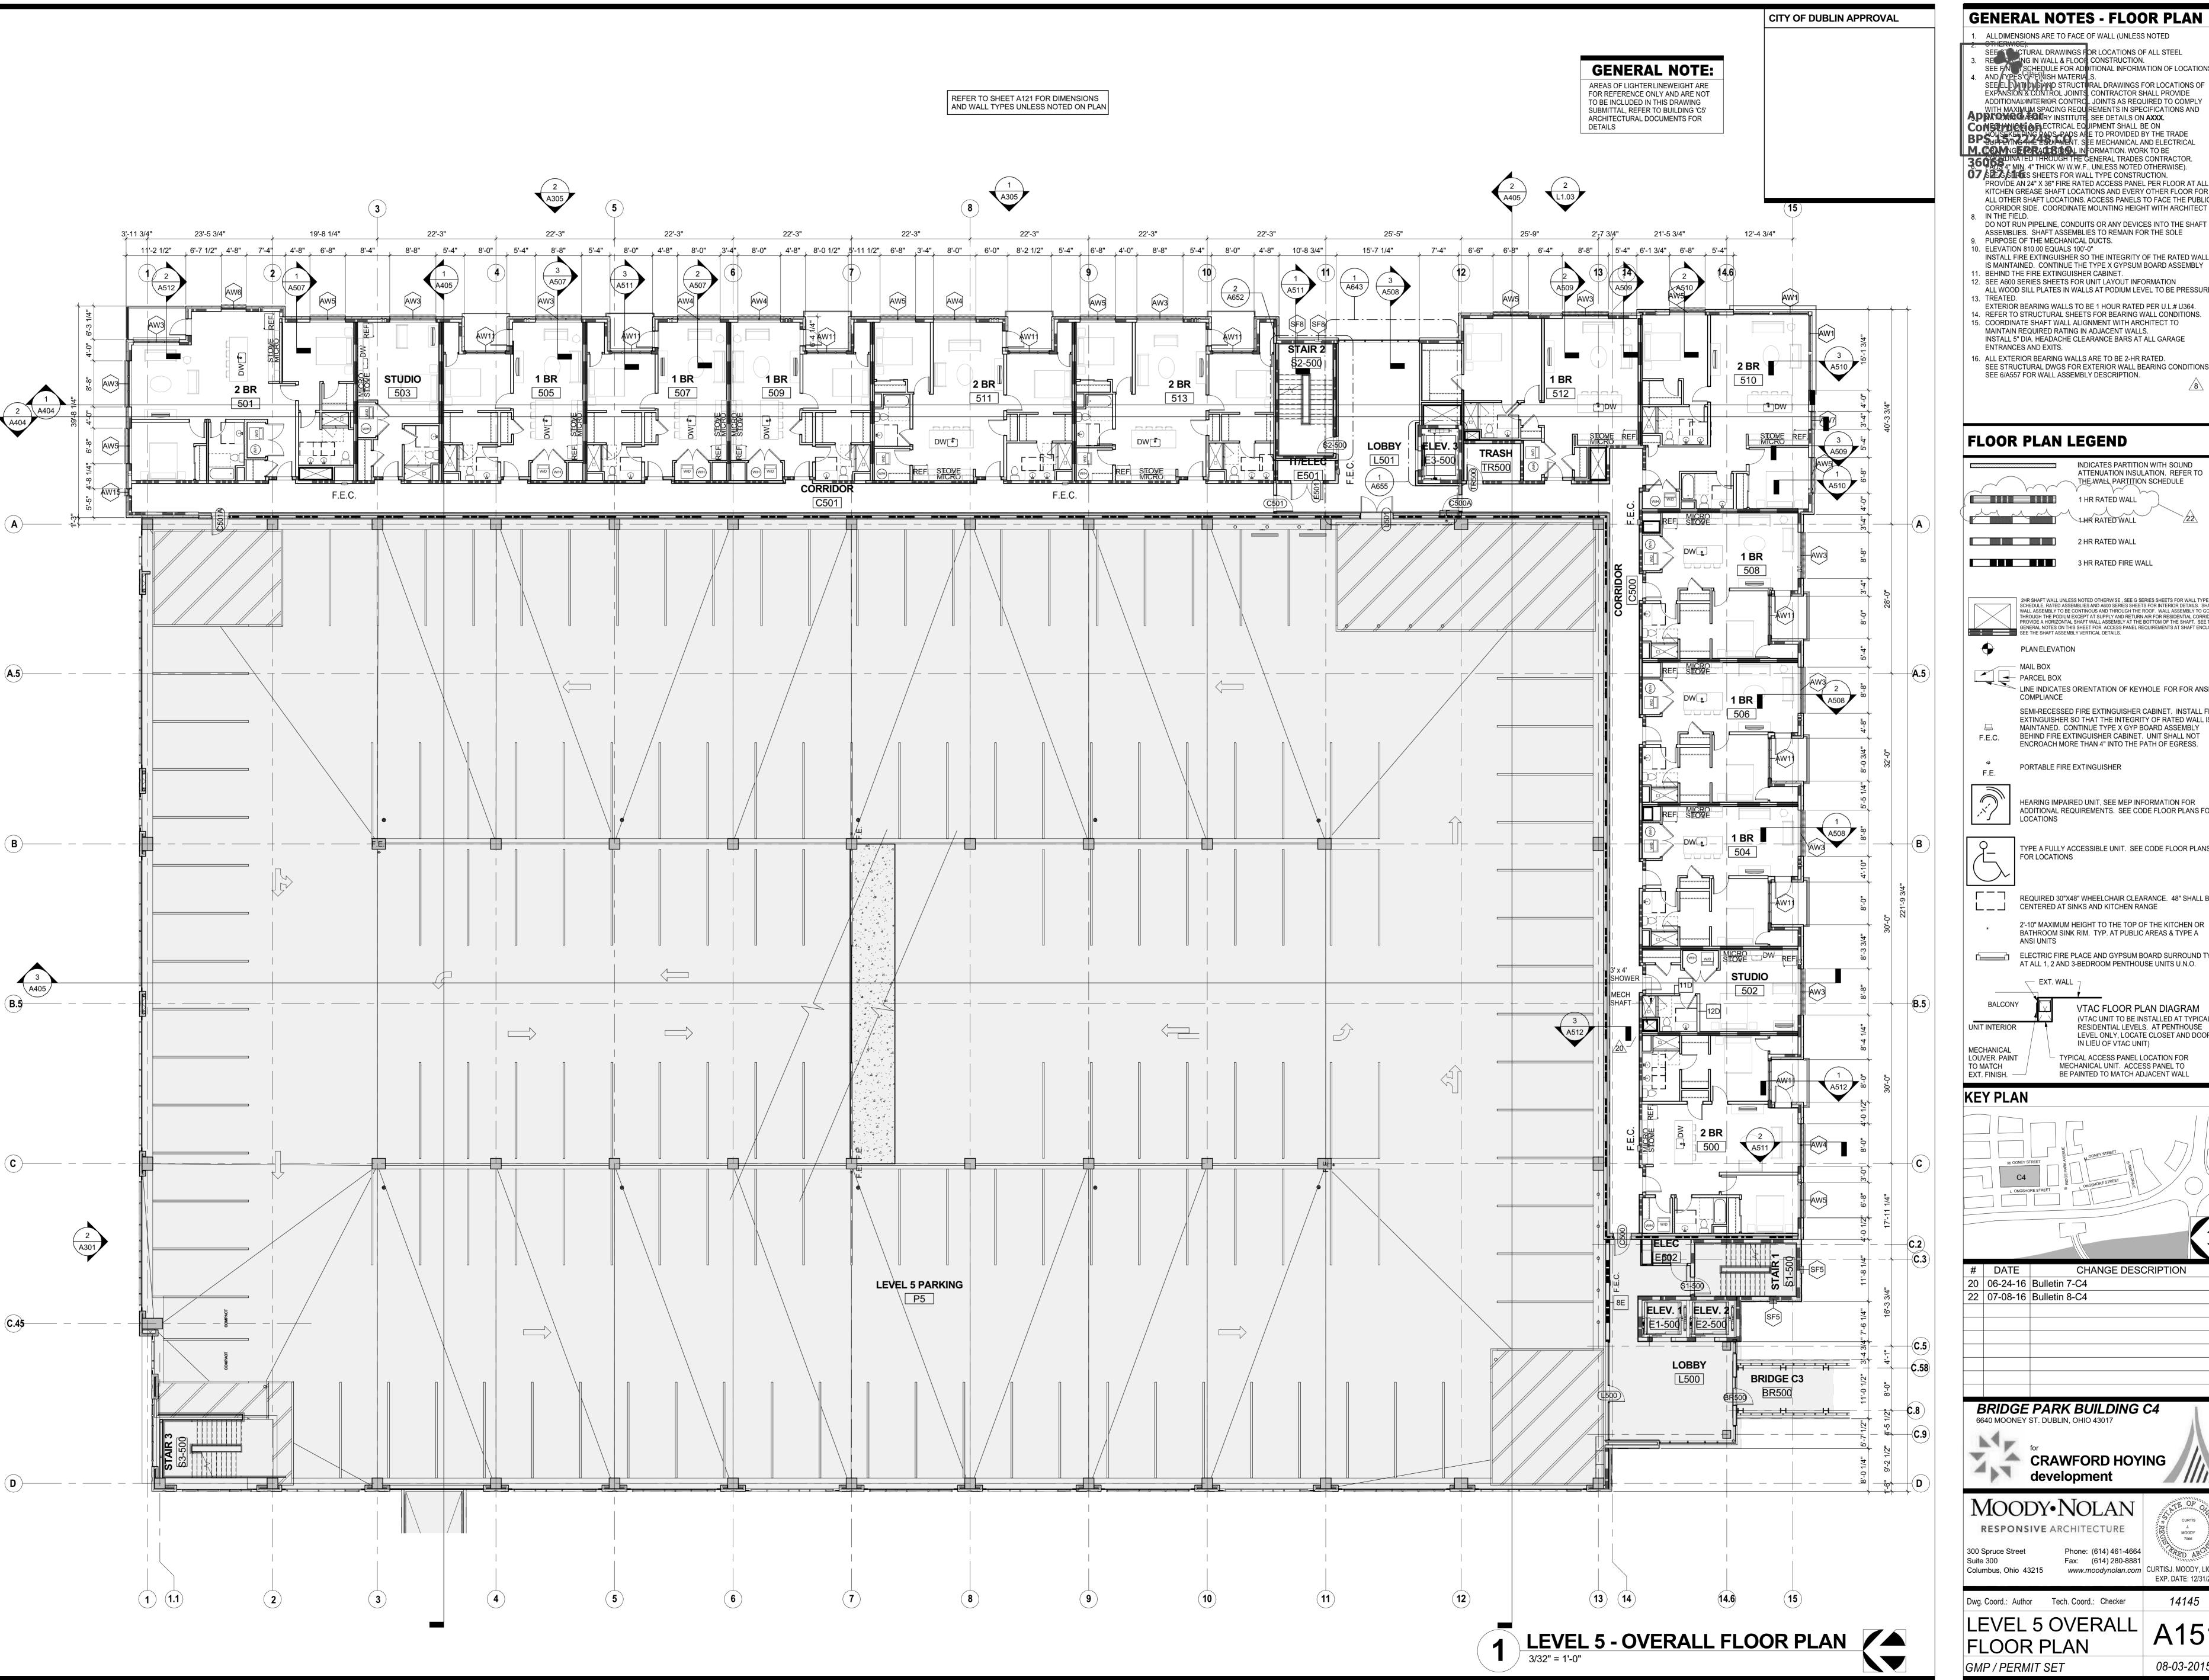

1. ALL DIMENSIONS ARE TO FACE OF WALL (UNLESS NOTED SEE TO UCTURAL DRAWINGS FOR LOCATIONS OF ALL STEEL
RE ING IN WALL & FLOOF CONSTRUCTION.
SEE FAN A SCHEDULE FOR ADDITIONAL INFORMATION OF LOCATIONS

AND TYPES OF FINISH MATERIALS.

SEE EL 1 ATT DISTAND STRUCTURAL DRAWINGS FOR LOCATIONS OF EXPANSION & CONTROL JOINTS. CONTRACTOR SHALL PROVIDE ADDITIONAL INTERIOR CONTROL JOINTS AS REQUIRED TO COMPLY WITH MAXIMUM SPACING REQUIREMENTS IN SPECIFICATIONS AND APPLICATIONS AND APPLICATIONS AND SEE DETAILS ON AXXX. CONSTINUENT & FLECTRICAL EQUIPMENT SHALL BE ON

BP SUPPLYING THE EQUIPMENT SHALL BE ON BP SUPPLYING THE EQUIPMENT. SEE MECHANICAL AND ELECTRICAL M. DRAMBET PRAIDSIDINAL INFORMATION. WORK TO BE CONTRACTOR. PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AND 25" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AND 25" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AND 25" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AND 25" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AND 25" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AND 25" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AND 25" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AND 25" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AND 25" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AND 25" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AND 25" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AND 25" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AND 25" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AND 25" FIRE RATED ACCESS PANEL PER ELOOR AT A PROVIDE AND 25" FIRE RATED ACCESS PANEL PER ELOOR AT A PAREL PER E PROVIDE AN 24" X 36" FIRE RATED ACCESS PANEL PER FLOOR AT ALL KITCHEN GREASE SHAFT LOCATIONS AND EVERY OTHER FLOOR FOR

ALL OTHER SHAFT LOCATIONS. ACCESS PANELS TO FACE THE PUBLIC CORRIDOR SIDE. COORDINATE MOUNTING HEIGHT WITH ARCHITECT DO NOT RUN PIPELINE, CONDUITS OR ANY DEVICES INTO THE SHAFT

ASSEMBLIES. SHAFT ASSEMBLIES TO REMAIN FOR THE SOLE 9. PURPOSE OF THE MECHANICAL DUCTS. 10. ELEVATION 810.00 EQUALS 100'-0" INSTALL FIRE EXTINGUISHER SO THE INTEGRITY OF THE RATED WALL

12. SEE A600 SERIES SHEETS FOR UNIT LAYOUT INFORMATION ALL WOOD SILL PLATES IN WALLS AT PODIUM LEVEL TO BE PRESSURE EXTERIOR BEARING WALLS TO BE 1 HOUR RATED PER U.L.# U364.

14. REFER TO STRUCTURAL SHEETS FOR BEARING WALL CONDITIONS.

15. COORDINATE SHAFT WALL ALIGNMENT WITH ARCHITECT TO MAINTAIN REQUIRED RATING IN ADJACENT WALLS. INSTALL 5" DIA. HEADACHE CLEARANCE BARS AT ALL GARAGE ENTRANCES AND EXITS.

16. ALL EXTERIOR BEARING WALLS ARE TO BE 2-HR RATED. SEE STRUCTURAL DWGS FOR EXTERIOR WALL BEARING CONDITIONS SEE 6/A557 FOR WALL ASSEMBLY DESCRIPTION.

FLOOR PLAN LEGEND

INDICATES PARTITION WITH SOUND ATTENUATION INSULATION. REFER TO THE WALL PARTITION SCHEDULE 1 HR RATED WALL 1 HR RATED WALL

2 HR RATED WALL 3 HR RATED FIRE WALL

2HR SHAFT WALL UNLESS NOTED OTHERWISE, SEE G SERIES SHEETS FOR WALL TYPE SCHEDULE, RATED ASSEMBLIES AND A600 SERIES SHEETS FOR INTERIOR DETAILS. SHAFT WALL ASSEMBLY TO BE CONTINOUS AND THROUGH THE ROOF. WALL ASSEMBLY TO GO THROUGH THE PODIUM EXCEPT AT SUPPLY AND RETURN AIR FOR RESIDENTIAL CORRIDORS. PROVIDE A HORIZONTAL SHAFT WALL ASSEMBLY AT THE BOTTOM OF THE SHAFT. SEE THE GENERAL NOTES ON THIS SHEET FOR ACCESS PANEL REQUIREMENTS AT SHAFT ENCLOSURE SEE THE SHAFT ASSEMBLY VERTICAL DETAILS.

PLAN ELEVATION

PARCEL BOX
LINE INDICATES ORIENTATION OF KEYHOLE FOR FOR ANSI SEMI-RECESSED FIRE EXTINGUISHER CABINET. INSTALL FIRE EXTINGUISHER SO THAT THE INTEGRITY OF RATED WALL IS MAINTANED. CONTINUE TYPE X GYP BOARD ASSEMBLY BEHIND FIRE EXTINGUISHER CABINET. UNIT SHALL NOT

ENCROACH MORE THAN 4" INTO THE PATH OF EGRESS. PORTABLE FIRE EXTINGUISHER

HEARING IMPAIRED UNIT, SEE MEP INFORMATION FOR ADDITIONAL REQUIREMENTS. SEE CODE FLOOR PLANS FOR LOCATIONS

FOR LOCATIONS REQUIRED 30"X48" WHEELCHAIR CLEARANCE. 48" SHALL BE CENTERED AT SINKS AND KITCHEN RANGE

TYPE A FULLY ACCESSIBLE UNIT. SEE CODE FLOOR PLANS

2'-10" MAXIMUM HEIGHT TO THE TOP OF THE KITCHEN OR BATHROOM SINK RIM. TYP. AT PUBLIC AREAS & TYPE A ELECTRIC FIRE PLACE AND GYPSUM BOARD SURROUND TYP.

AT ALL 1, 2 AND 3-BEDROOM PENTHOUSE UNITS U.N.O. VTAC FLOOR PLAN DIAGRAM

(VTAC UNIT TO BE INSTALLED AT TYPICAL RESIDENTIAL LEVELS. AT PENTHOUSE LEVEL ONLY, LOCATE CLOSET AND DOOR IN LIEU OF VTAC UNIT) TYPICAL ACCESS PANEL LOCATION FOR

MECHANICAL UNIT. ACCESS PANEL TO BE PAINTED TO MATCH ADJACENT WALL

CHANGE DESCRIPTION # DATE 20 | 06-24-16 | Bulletin 7-C4 22 | 07-08-16 | Bulletin 8-C4

BRIDGE PARK BUILDING C4



MOODY•NOLAN


Phone: (614) 461-4664

RESPONSIVE ARCHITECTURE

Fax: (614) 280-8881 Columbus, Ohio 43215 www.moodynolan.com CURTISJ. MOODY, LIC. #7066 Dwg. Coord.: Author Tech. Coord.: Checker

LEVEL 5 OVERALL

A151 08-03-2015

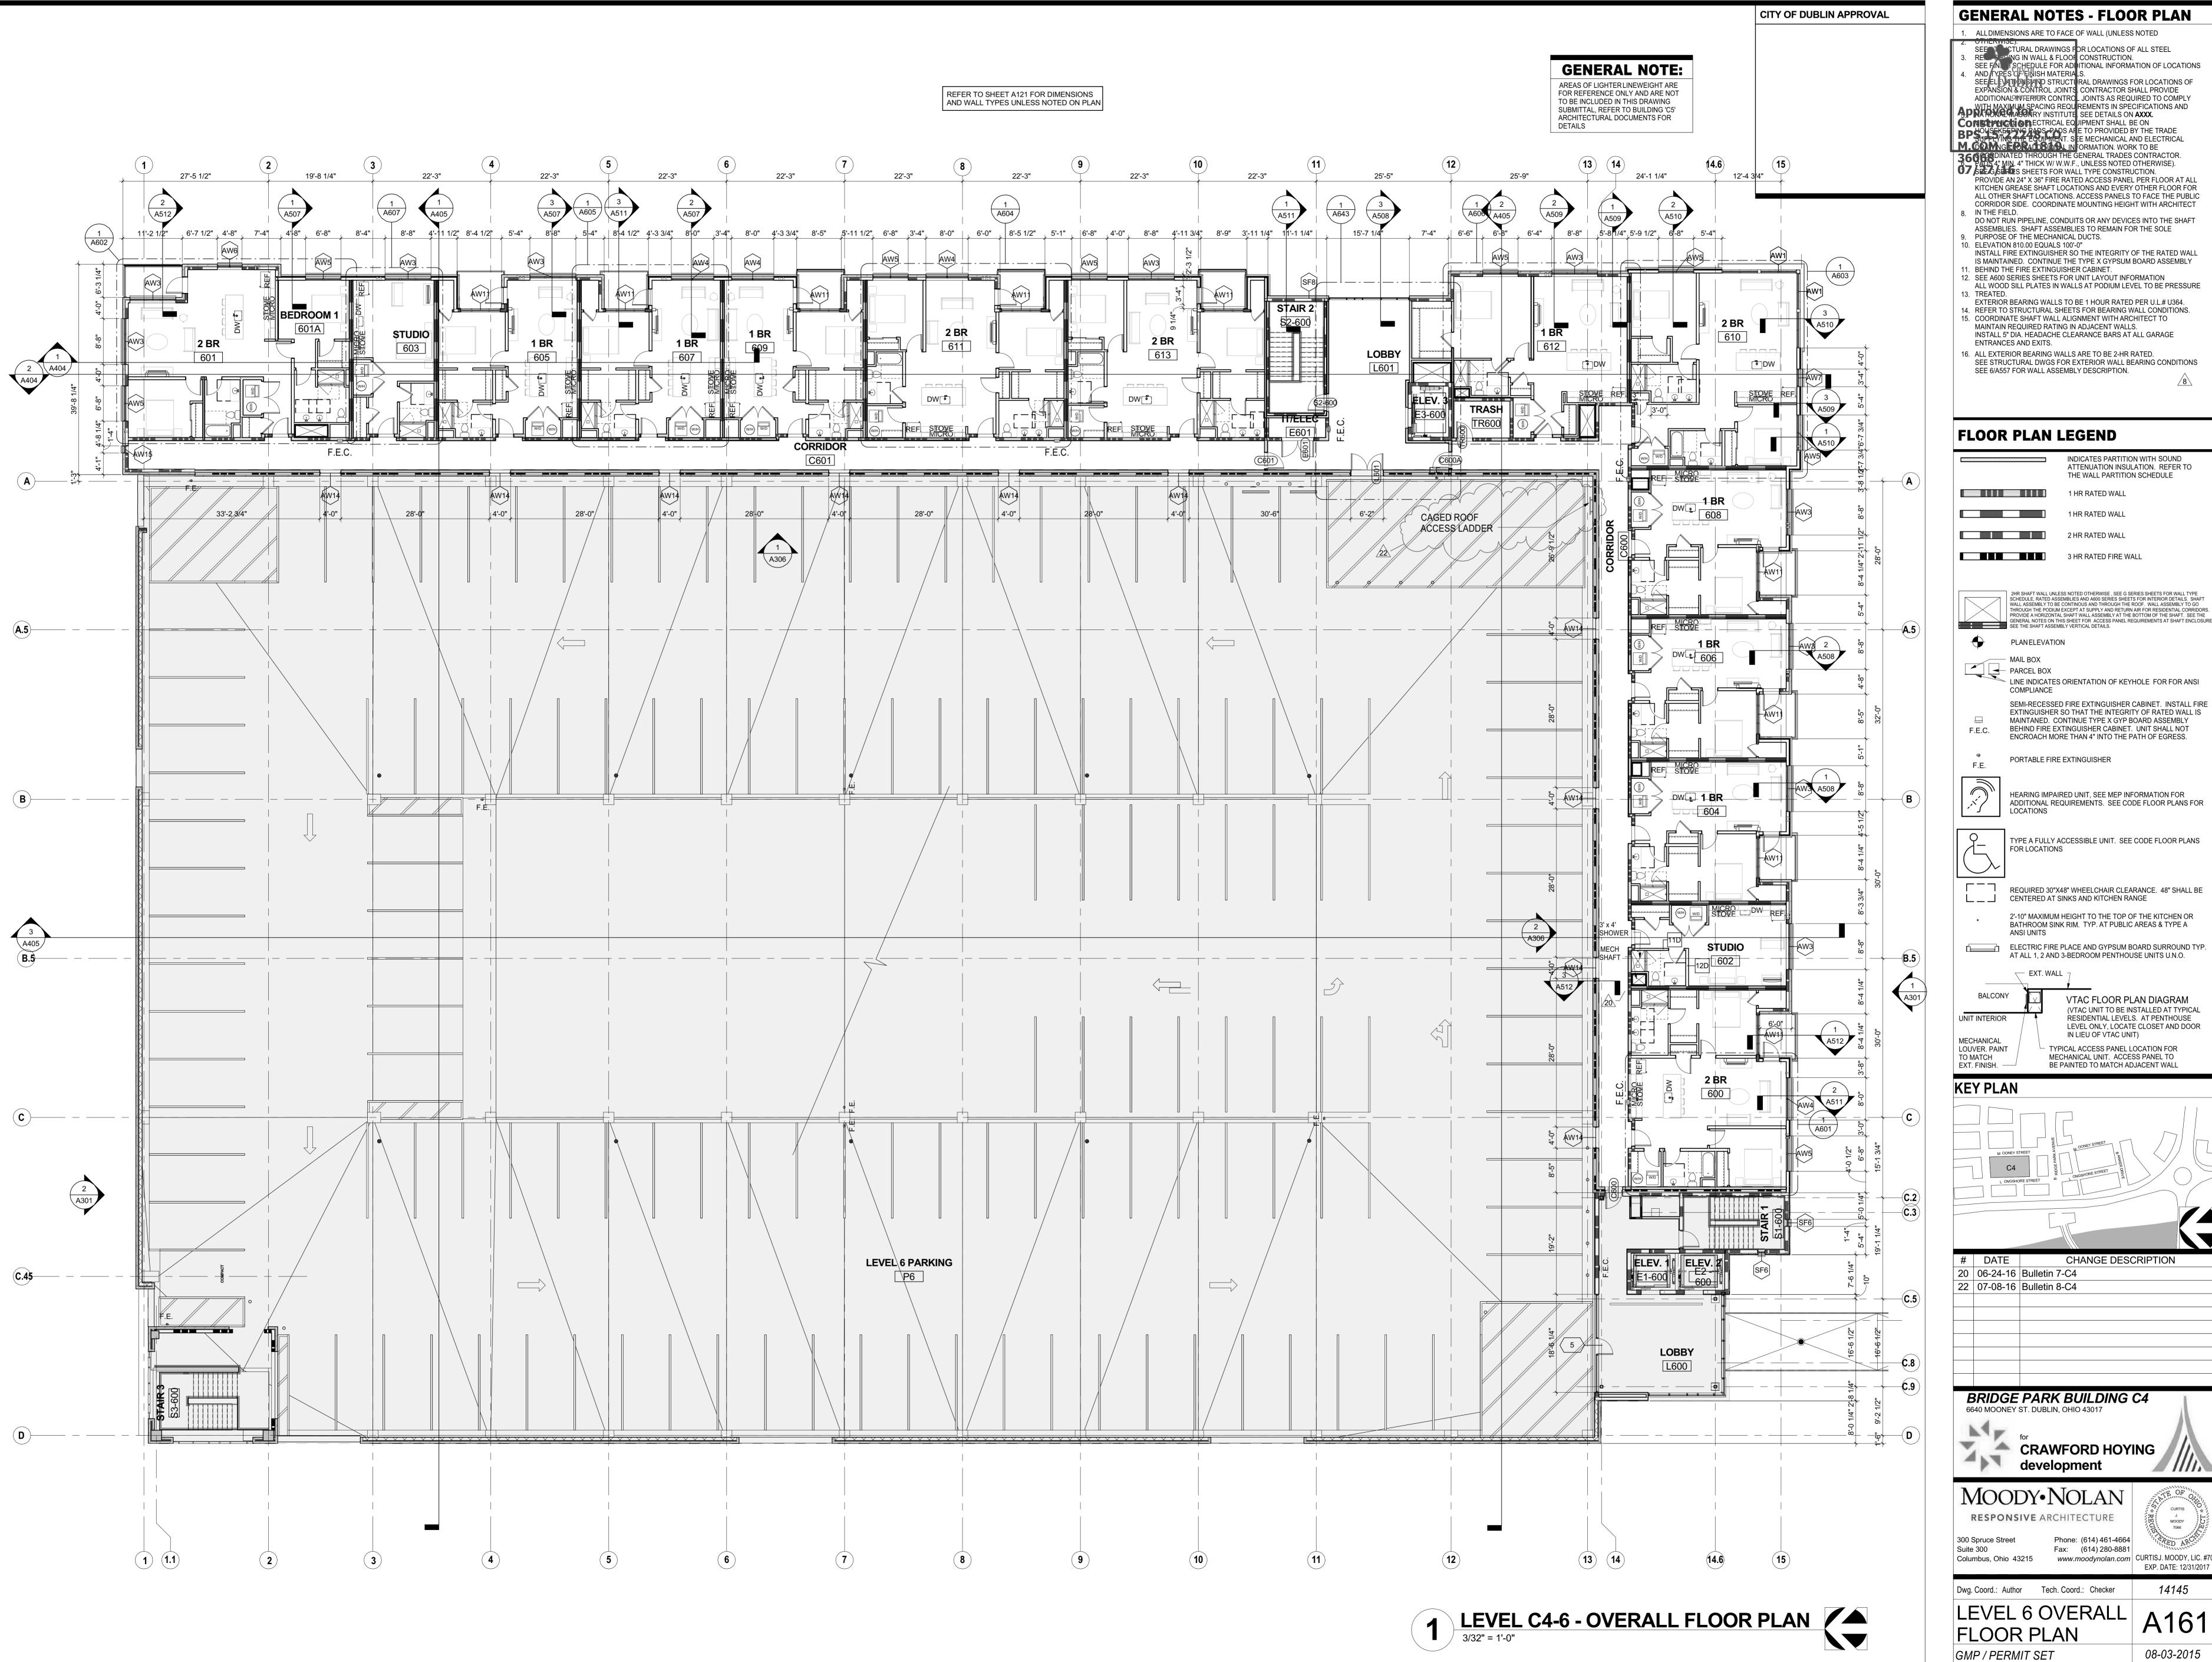

1. ALL DIMENSIONS ARE TO FACE OF WALL (UNLESS NOTED SEE TO CTURAL DRAWINGS FOR LOCATIONS OF ALL STEEL
RELIGIOUS OF ALL S AND TYPES OF FINISH MATERIALS.

SEE EL: V4100154ND STRUCTURAL DRAWINGS FOR LOCATIONS OF EXPANSION & CONTROL JOINTS. CONTRACTOR SHALL PROVIDE

INDICATES PARTITION WITH SOUND ATTENUATION INSULATION. REFER TO

THE WALL PARTITION SCHEDULE

1 HR RATED WALL

1 HR RATED WALL

SEMI-RECESSED FIRE EXTINGUISHER CABINET. INSTALL FIRE EXTINGUISHER SO THAT THE INTEGRITY OF RATED WALL IS

MAINTANED. CONTINUE TYPE X GYP BOARD ASSEMBLY BEHIND FIRE EXTINGUISHER CABINET. UNIT SHALL NOT ENCROACH MORE THAN 4" INTO THE PATH OF EGRESS.

HEARING IMPAIRED UNIT, SEE MEP INFORMATION FOR ADDITIONAL REQUIREMENTS. SEE CODE FLOOR PLANS FOR

TYPE A FULLY ACCESSIBLE UNIT. SEE CODE FLOOR PLANS

REQUIRED 30"X48" WHEELCHAIR CLEARANCE. 48" SHALL BE

2'-10" MAXIMUM HEIGHT TO THE TOP OF THE KITCHEN OR BATHROOM SINK RIM. TYP. AT PUBLIC AREAS & TYPE A

AT ALL 1, 2 AND 3-BEDROOM PENTHOUSE UNITS U.N.O.

IN LIEU OF VTAC UNIT)

TYPICAL ACCESS PANEL LOCATION FOR

MECHANICAL UNIT. ACCESS PANEL TO BE PAINTED TO MATCH ADJACENT WALL

CHANGE DESCRIPTION

VTAC FLOOR PLAN DIAGRAM (VTAC UNIT TO BE INSTALLED AT TYPICAL RESIDENTIAL LEVELS. AT PENTHOUSE LEVEL ONLY, LOCATE CLOSET AND DOOR

CENTERED AT SINKS AND KITCHEN RANGE

PORTABLE FIRE EXTINGUISHER

PLAN ELEVATION

MAIL BOX

LOCATIONS

FOR LOCATIONS

Fax: (614) 280-8881 Columbus, Ohio 43215 www.moodynolan.com CURTISJ. MOODY, LIC. #7066 EXP. DATE: 12/31/2017 Dwg. Coord.: Author Tech. Coord.: Checker 14145

LEVEL 6 OVERALL FLOOR PLAN

CRAWFORD HOYING

Phone: (614) 461-4664

development

A161 08-03-2015