




## STONE FACADE

- LOCATED ON LEVEL 00 AND LEVEL 01
- ARRISCRAFT - URBAN LEDGESTONE - DUSK (BASIS OF DESIGN) AS WALL MATERIAL WITH BASE COURSES OF NATURAL LIMESTONE
- ARRISCRAFT URBAN LEDGESTONE IS A CALCIUM SILICATE MASONRY UNIT - MAN MADE STONE WITH NATURAL INGREDIENTS CONSISTING OF: 93% SAND, 7% LIME, & FORMED W/ 1,000 TONS OF PRESSURE
- THE MANUFACTURER PROVIDES A LIFETIME WARRANTY
- LOW ABSORPTION RATE @ 8%-10%
- PRODUCT IS CURRENTLY INSTALLED ON MANY BUILDINGS IN DUBLIN, OH

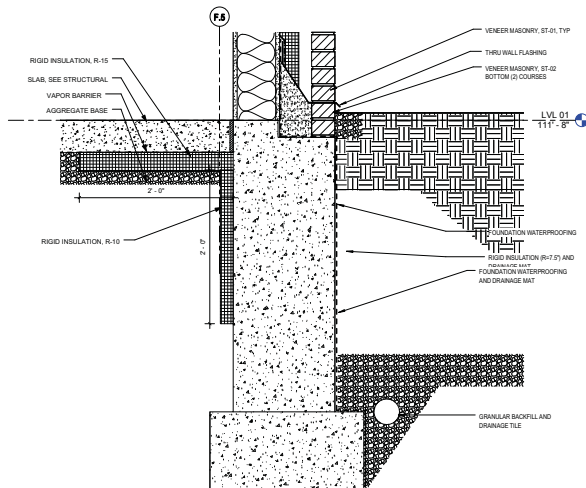

BASE LIMESTONE COURSE




- 





## METAL PANEL @ SOFFIT


- ALUMINUM COMPOSITE MATERIAL RAINSCREEN - NATURAL BRUSHED 50 ( BASIS OF DESIGN)
- COMPOSED OF TWO SHEETS OF SMOOTH .02" ALUMINUM THERMOBONDED TO A POLYETHYLENE CORE IN A CONTINUOUS PROCESS, SHEETS ARE MADE INTO PANELS THAT ARE MOUNTED TO A WATERPROOF EXTERIOR WALL
- EXTRAORDINARY FLATNESS & RIGIDITY, EXCELLENT FORMABILITY, LOW WEIGHT AND OUTSTANDING WEATHER RESISTENCE
- NATURAL, BRUSHED FINISH THAT SCATTERS COLOR AT CLOSE DISTANCES, BUT RETAINS SMOOTH ALUMINUM LOOK FROM AFAR

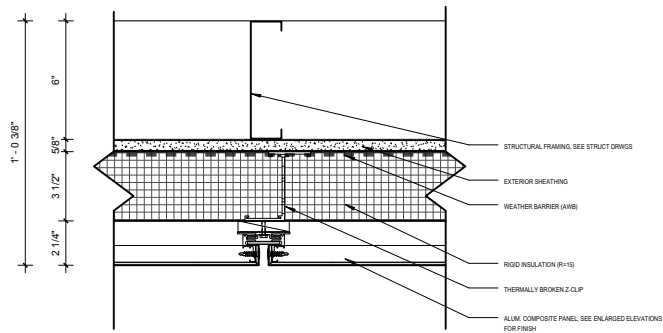



## GLASS @ STOREFRONT & CURTAIN WALL (LEVEL 01 & 02)

- VIRACON - VE1-2M (BASIS OF DESIGN), VERY CLEAR INSULATED GLASS WITH LOW REFLECTIVITY
- 1/4" VE1-2M #2, 1/2" ARGON GAS FILLED AIRSPACE, 1/4" CLEAR
- TRANSMITTANCE: 70% VISIBLE LIGHT, 32% SOLAR ENERGY, 10% ULTRA-VIOLET
- REFLECTANCE: 11% VISIBLE LIGHT-EXTERIOR, 12% VISIBLE LIGHT-INTERIOR, 31% SOLAR ENERGY

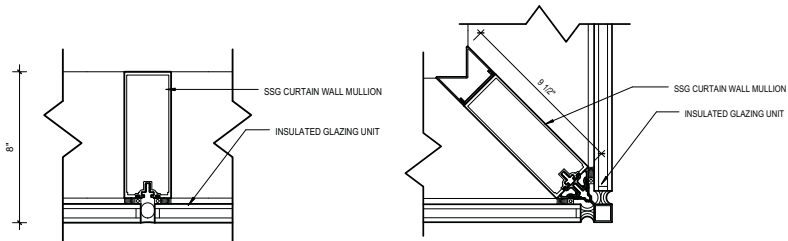


SAME GLASS SPEC USED @ CML NORTHSIDE LIBRARY





## OPAQUE PANELS @ LEVEL 02 CURTAIN WALL


- ALUMINUM COMPOSITE MATERIAL - WHITE SILVER 884 (BASIS OF DESIGN)
- COMPOSED OF TWO SHEETS OF SMOOTH .02" ALUMINUM THERMOBONDED TO A POLYETHYLENE CORE IN A CONTINUOUS PROCESS, SHEETS ARE MADE INTO PANELS THAT ARE MOUNTED TO A WATERPROOF EXTERIOR WALL
- EXTRAORDINARY FLATNESS & RIGIDITY, EXCELLENT FORMABILITY, LOW WEIGHT AND OUTSTANDING WEATHER RESISTENCE
- WHITE COLOR W/ SPARKLE ACCENTS

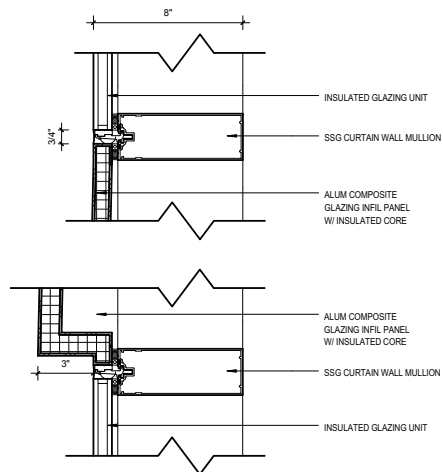



## CAST-IN-PLACE CONCRETE

- LOCATED ALONG EAST FACADE @ RAIN GARDEN AND STAIR

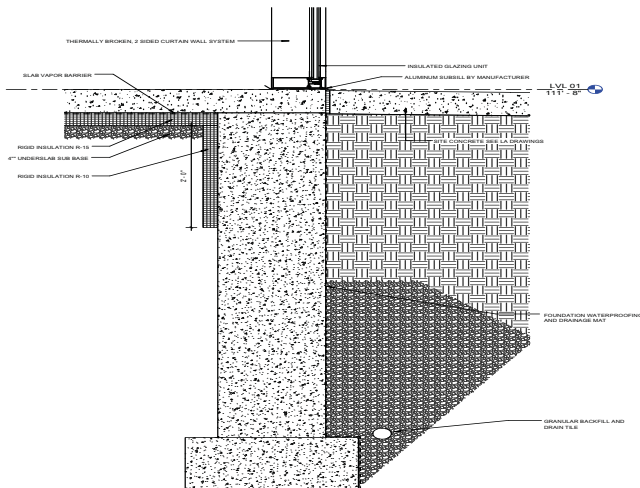



## LOUVERS @ LEVEL 02 MECHANICAL WELL

- STRUCTURALLY GLAZED INTO LEVEL 02 CURTAIN WALL TO INCREASE MECHANICAL EQUIPMENT EFFICIENCY
- 6063-T6 ALLOY LOUVER W/ 3003 H14 PERFORATED ALUMINUM SHEET - C/S PERFORM LOUVER MODEL PL-4080 (BASIS OF DESIGN)
- PERFORATED ALUMINUM SHEET TO BE POWDERCOATED TO MATCH WHITE SILVER 884 ACM IN LEVEL 02 CURTAIN WALL

