

Gardco PureForm LED wall sconce PWS with precision optics offers a sleek, low profile design that will complement a range of architectural styles.

Project: Location: Cat No: Type: Lamps: City: Notes:

Ordering guide table for PWS LED wall sconce. Columns include PWS, Number of LEDs, Drive Current, LED Color - Generation, Distribution, Emergency, Voltage, Dimming controls, Motion-sensing lens, Photo-sensing, Electrical & Shield, Finish.

- 1. Only 300mA can be used with battery backup (ESBC) configuration.
2. Extended lead times apply. Contact factory for details.
3. Available only in 120 or 277V.
4. Not available with other dimming control options.
5. Not available with motion sensor.

PWS_PureForm_wall_sconce 04/22 page 1 of 6




Gardco PureForm LED area medium P26 features a sleek, low profile design and optimal performance. PureForm area medium is designed to achieve maximum pole spacing.

Project: Location: Cat No: Type: Lamps: City: Notes:

Ordering guide table for P26 LED area medium. Columns include P26, Number of LEDs, Drive Current, LED Color - Generation, Mounting, Distribution, Voltage.

- 1. Extended lead times apply. Contact factory for details.
2. Mounts to a 4" x 5" round pole with adapter included for square poles.
3. Limited to a maximum of 45 degrees away from horizontal.
4. Not available with other dimming control options.
5. Not available with motion sensor.

P26_PureForm_area_medium 04/22 page 1 of 9

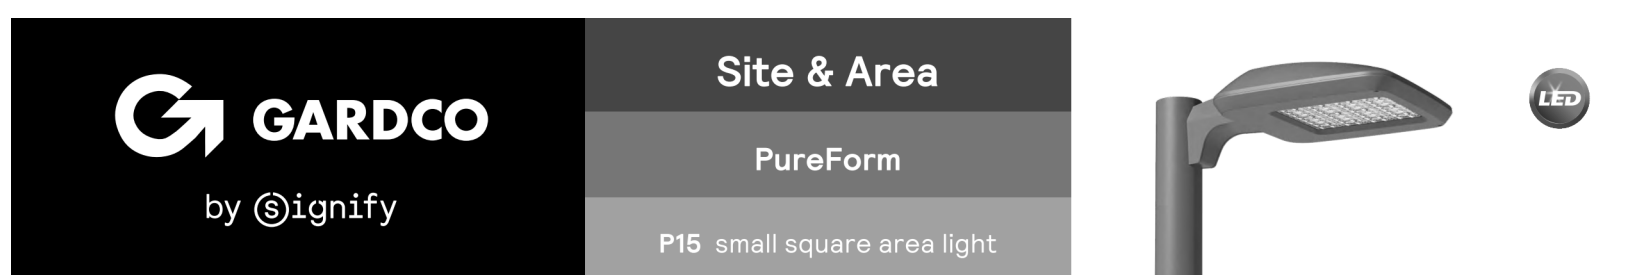


Gardco PureForm LED area small square precision P15 features a sleek, low profile design. Precision optics are optimized for maximum efficiency and uniformity.

Project: Location: Cat No: Type: Lamps: City: Notes:

Ordering guide table for P15 LED area small square. Columns include P15, Number of LEDs, Drive Current, LED Color - Generation, Mounting, Distribution, Voltage.

- 1. Product ships standard with TGA.
2. Extended lead times apply. Contact factory for details.
3. Mounts to a 4" x 5" round pole with adapter included for square poles.
4. Not available with other dimming control options (including recessed).
5. BLSD must be specified with motion sensor lens (L2 or L3).
6. Not available with photocontrols.

P15_PureForm_area_small_square_precision 10/21 page 1 of 6

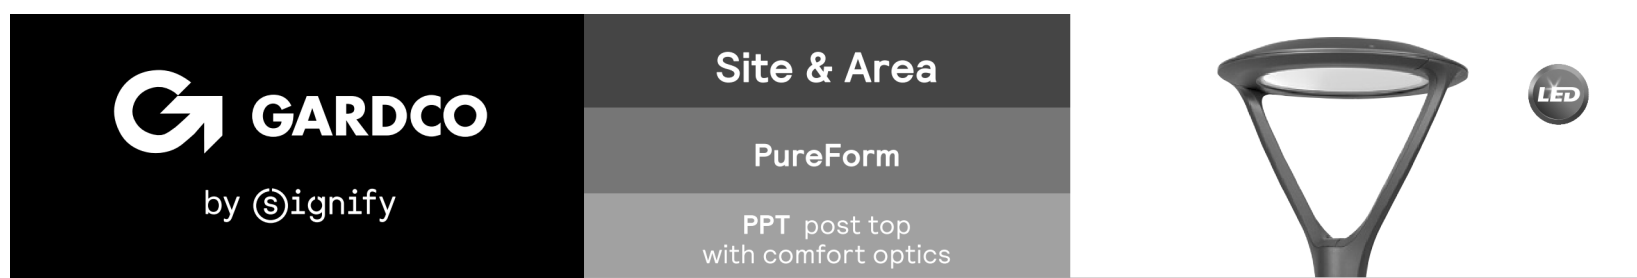

Gardco PureForm LED post top features a sleek, low profile design. Comfort optics are designed to enhance visual comfort by reducing glare.

Project: Location: Cat No: Type: Lamps: City: Notes:

Ordering guide table for PPT LED post top. Columns include PPT, Number of LEDs, Drive Current, LED Color - Generation, Mounting, Distribution, Voltage.

Options table for PPT. Columns include Dimming controls, Motion sensing, Photo-sensing, Electrical & Shield, Finish.

- 1. 150, 180, and 2100mA not available with emergency battery backup (ESBC).
2. 2100mA not available with emergency battery backup cold weather (ESBC).
3. Extended lead times apply. Contact factory for details.
4. Not available with other control options.

PPT_PureForm_post_top 04/22 page 1 of 5



HGA

333 East Erie Street Milwaukee, Wisconsin 53202 Telephone 414.278.8200

KORDA NEMETH ENGINEERING CIVIL/MECHANICAL/ELECTRICAL/PLUMBING/STRUCTURAL/TECHNOLOGY ENGINEER


KORDA 1650 WATERMARK DRIVE COLUMBUS, OH 43215 614.487.1650

MKSK LANDSCAPE ARCHITECT

MKSK 462 SOUTH LUDLOW AVE COLUMBUS, OH 43215 614.621.2796

MOUNT CARMEL HEALTH SYSTEM

MOUNT CARMEL NORTHWEST HEALTH CAMPUS 4105 EMERALD PARKWAY DUBLIN, OH

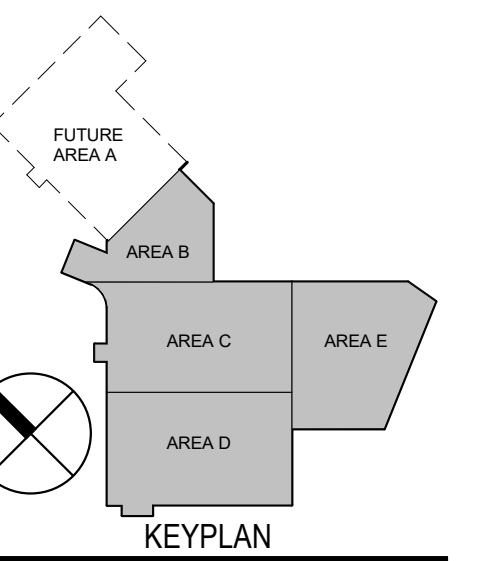

NOT FOR CONSTRUCTION

Table with 3 columns: NO, DESCRIPTION, DATE.


HGA NO: 1927-004-00

SITE DETAIL

DATE: SEPTEMBER 23, 2022 FINAL DEVELOPMENT PLAN

E109

COPYRIGHT HAMMEL, GREEN AND ABRAHAMSON, INC.

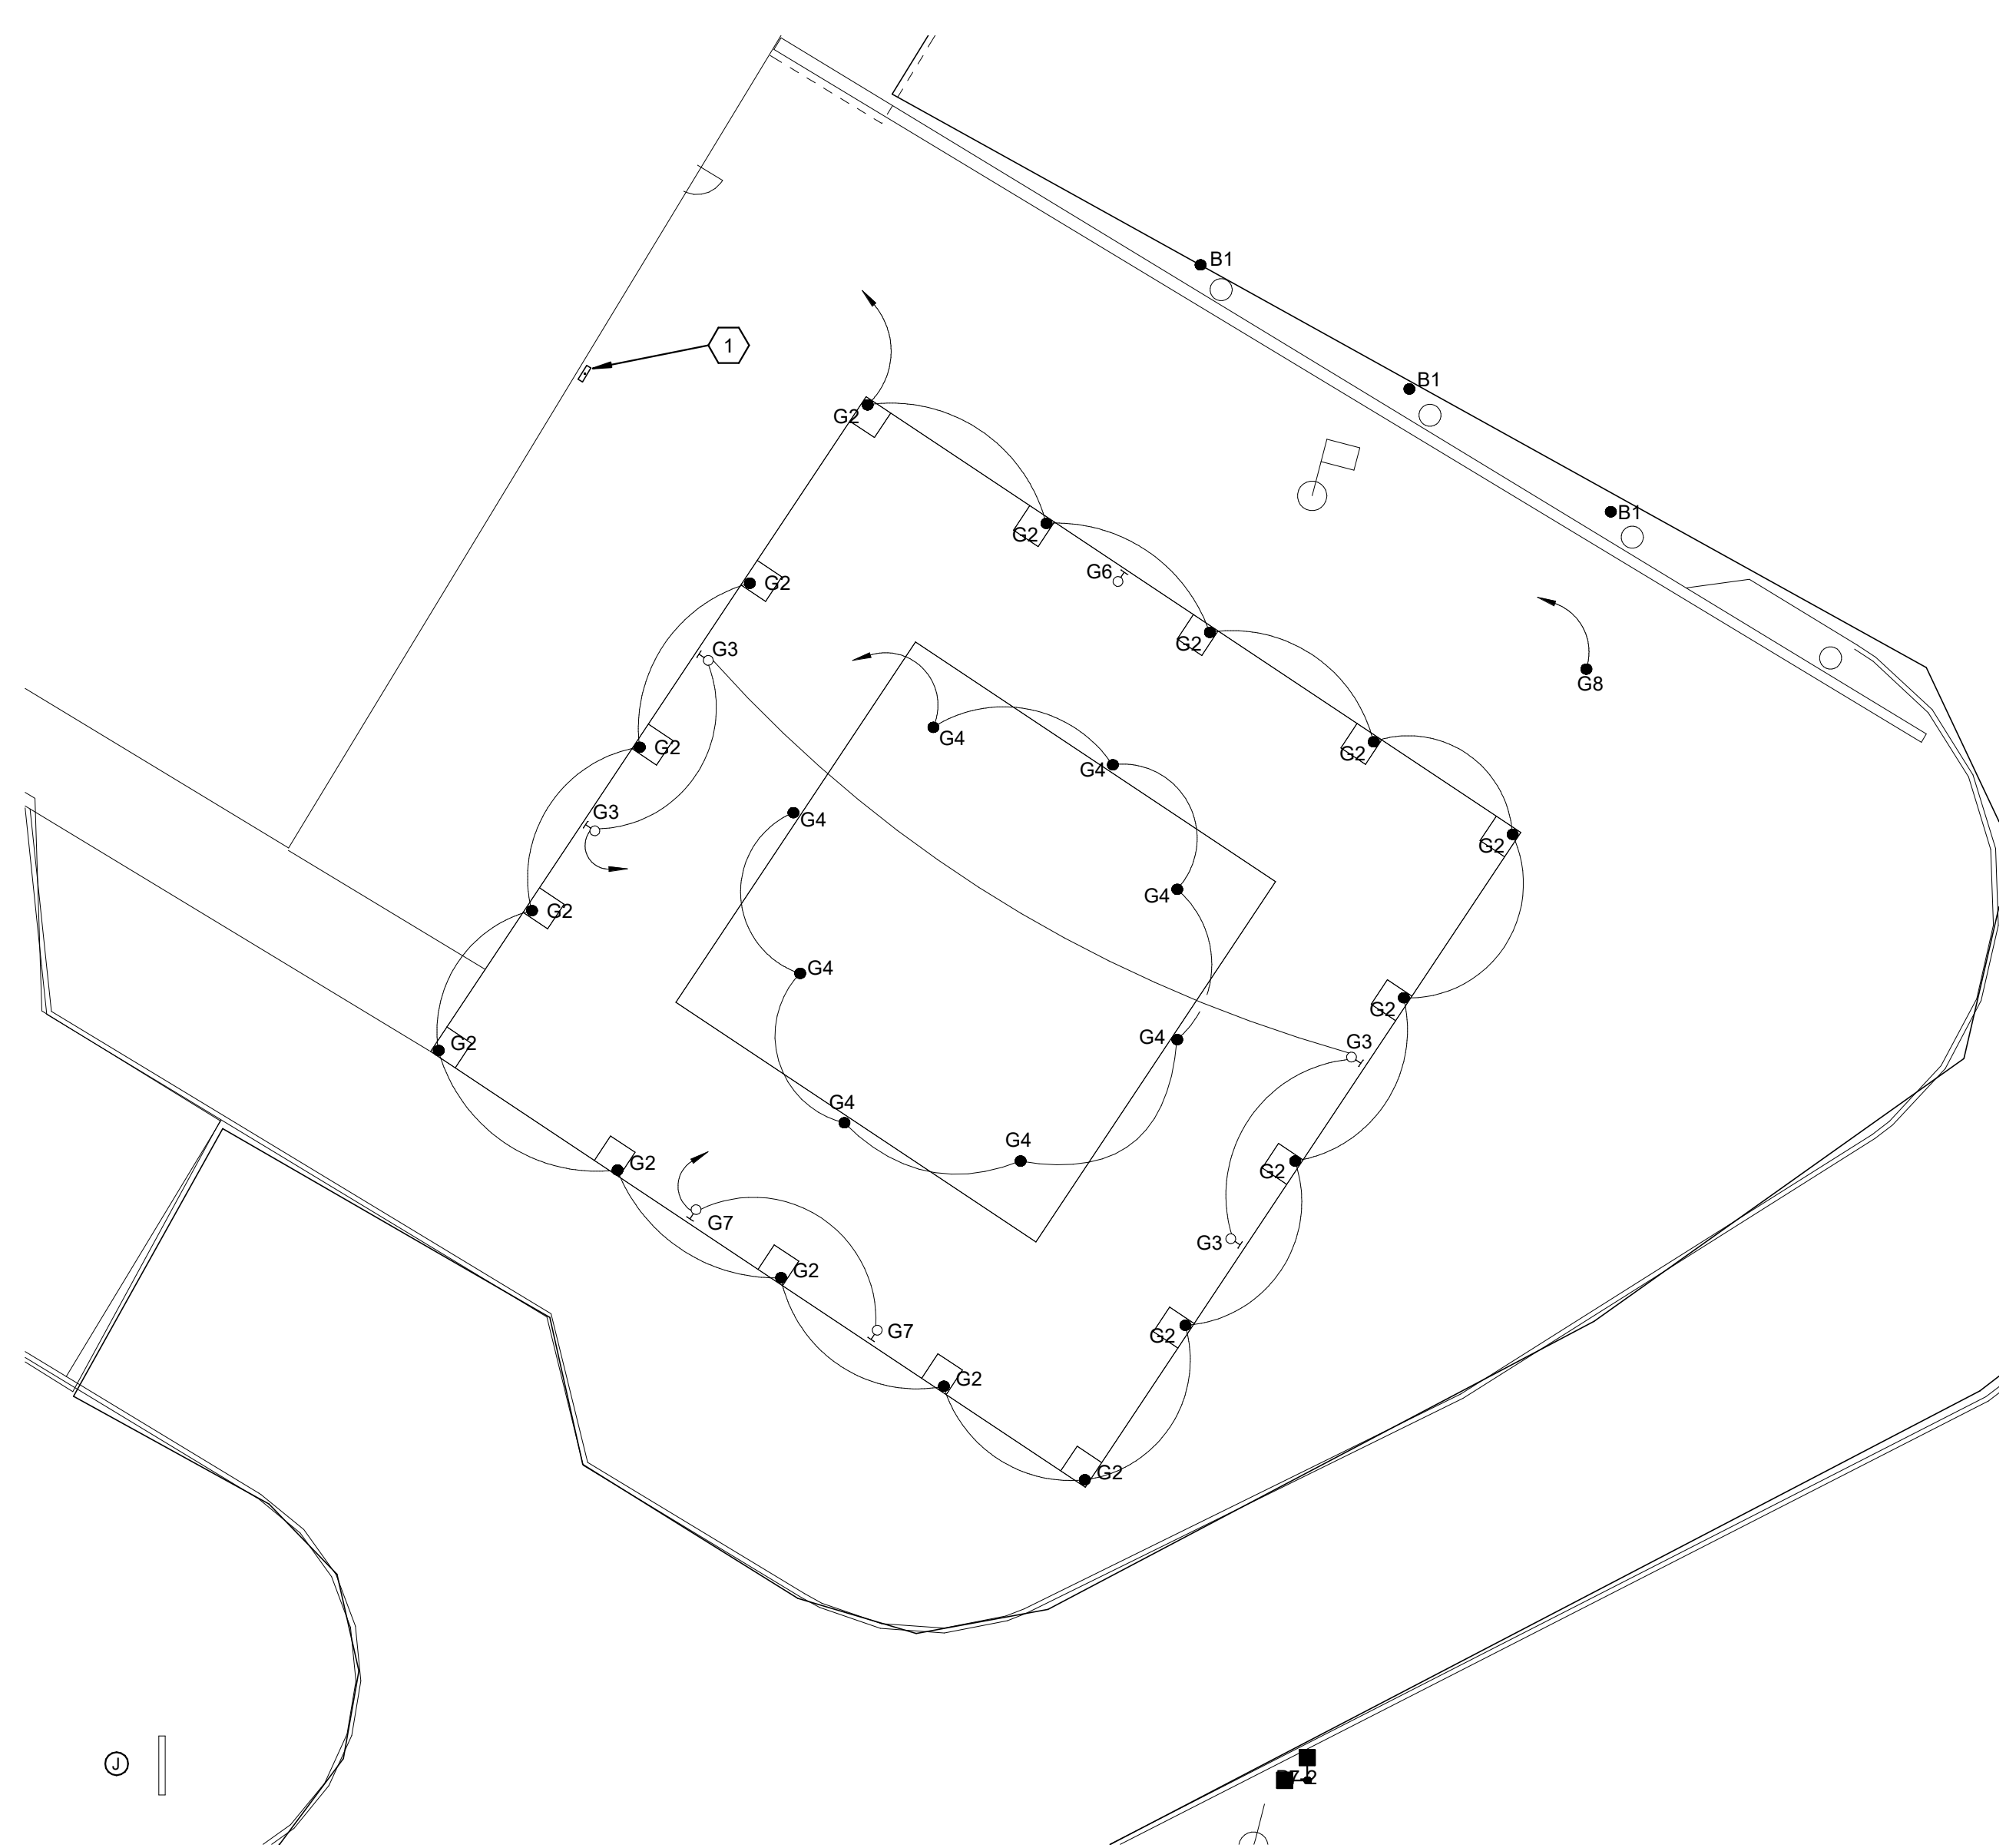

1 FLOOR PLAN
SITE PLAN AREA B - Callout 1
SCALE: 1" = 160'
0' 1' 2' 4' 8'

- GENERAL NOTES**
- ANY PRIVATE UTILITY WORK WITHIN R/W AND/OR PUBLIC EASEMENTS REQUIRE SEPARATE R/W PERMIT(S).
- CODED NOTES**
- POINT LIGHTING SYSTEM CONTROLLER. CATALOG #PHC-66002-AC-BC-HC-HWC-VC.

HGA

333 East Erie Street
Milwaukee, Wisconsin 53202
Telephone 414.278.8200

KORDA
KORDA NEMETH ENGINEERING
CIVIL/MECHANICAL/ELECTRICAL/
PLUMBING/STRUCTURAL/
TECHNOLOGY ENGINEER


KORDA
1650 WATERMARK DRIVE
COLUMBUS, OH 43215
614.487.1650

MKSK
LANDSCAPE ARCHITECT

MKSK
462 SOUTH LUDLOW ALLEY
COLUMBUS, OH 43215
614.621.2796

**MOUNT CARMEL
HEALTH
SYSTEM**

MOUNT CARMEL
NORTHWEST HEALTH
CAMPUS
4105 EMERALD PARKWAY
DUBLIN, OH

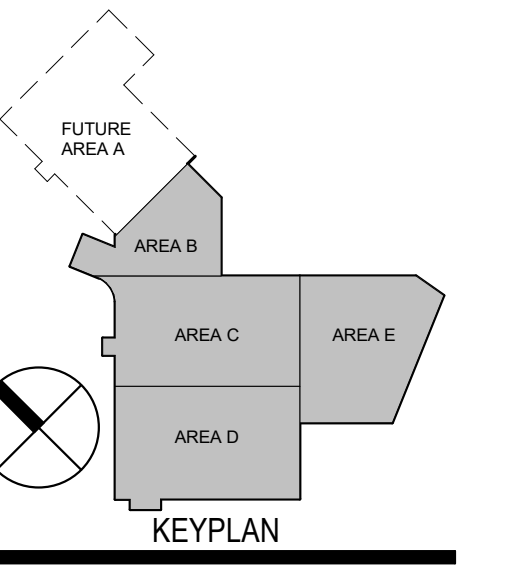

**NOT FOR
CONSTRUCTION**

NO	DESCRIPTION	DATE

ISSUANCE HISTORY - THIS SHEET
HGA NO. 1927-004-00

SITE DETAIL

DATE: SEPTEMBER 23, 2022
**FINAL DEVELOPMENT
PLAN**

E108

COPYRIGHT HAMMEL, GREEN AND ABRAHAMSON, INC.

LUMINAIRE SCHEDULE

B: BOLLARD C: CEILING CV: COVE G: GROUND H: HANDRAIL P: POLE R: RECESSED S: SUSPENDED T: TABLE UC: UNDERCABINET W: WALL X: UNIVERSAL

PARTIAL MODEL NUMBERS MAY BE SHOWN AND ARE INTENDED TO INDICATE ACCEPTABLE MANUFACTURER'S PRODUCT LINE. EXACT MODEL NUMBERS MEETING THE FIXTURE DESCRIPTION SHALL BE OBTAINED FROM THE MANUFACTURER'S AGENTS. ALL FIXTURES MAY NOT BE USED - REFER TO PLANS. DIMENSIONS MAY VARY. REFER TO THE SPECIFICATIONS SECTIONS 26 51 13 FOR ADDITIONAL REQUIREMENTS. REFER TO DRAWINGS FOR FIXTURES CIRCUITED AND CONTROL.

TAG	MANUFACTURER	SERIES	MODEL	DIMENSIONS (W X L X D)	DESCRIPTION	SOURCE	VOLTAGE	WATTAGE	COLOR TEMP	LUMENS	DIMMING	HOUSING	MOUNTING	LENS	FINISH/TRIM	OPTIONS	APPROVED MANUFACTURERS
P2	GARDCO	PUREFORM	P26-64L-700-NW-G2-2	(15.2' X 32.4' X 5.5')	SINGLE HEAD AREA LIGHT - TYPE 2	LED	480V	133 W	4000K	18803 LM	SEE OPTIONS	DIE-CAST ALUMINUM	POLE MOUNTED	TYPE 2 DISTRIBUTION	TBD	SINGLE HEAD. PROVIDE INTEGRAL MOTION SENSOR WITH BI-LEVEL DIMMING CONTROLS. BANNER ARMS.	
P3	GARDCO	PUREFORM	P26-64L-700-MW-G2-3	(15.2' X 32.4' X 5.5')	SINGLE HEAD AREA LIGHT - TYPE 3	LED	480V	133 W	4000K	18186 LM	SEE OPTIONS	DIE-CAST ALUMINUM	POLE MOUNTED	TYPE 3 DISTRIBUTION	TBD	SINGLE HEAD. PROVIDE INTEGRAL MOTION SENSOR WITH BI-LEVEL DIMMING CONTROLS. BANNER ARMS.	
P4	GARDCO	PUREFORM	P26-64L-700-MW-G2-4	(15.2' X 32.4' X 5.5')	SINGLE HEAD AREA LIGHT - TYPE 4	LED	480V	133 W	4000K	18865 LM	SEE OPTIONS	DIE-CAST ALUMINUM	POLE MOUNTED	TYPE 4 DISTRIBUTION	TBD	SINGLE HEAD. PROVIDE INTEGRAL MOTION SENSOR WITH BI-LEVEL DIMMING CONTROLS. BANNER ARMS.	
P4-2	GARDCO	PUREFORM	P26-64L-700-MW-G2-4	(15.2' X 32.4' X 5.5')	BACK TO BACK DOUBLE HEAD AREA LIGHT - TYPE 4	LED	277V	266 W	4000K	18865 LM	SEE OPTIONS	DIE-CAST ALUMINUM	POLE MOUNTED	TYPE 4 DISTRIBUTION	TBD	DOUBLE HEAD. PROVIDE INTEGRAL MOTION SENSOR WITH BI-LEVEL DIMMING CONTROLS. BANNER ARMS.	
P5	GARDCO	PUREFORM	P26-48L-500-MW-G2-2	(15.2' X 32.4' X 5.5')	SINGLE HEAD AREA LIGHT - TYPE 2	LED	UNV	75 W	4000K	10753 LM	SEE OPTIONS	DIE-CAST ALUMINUM	POLE MOUNTED	TYPE 2 DISTRIBUTION	TBD	SINGLE HEAD. PROVIDE INTEGRAL MOTION SENSOR WITH BI-LEVEL DIMMING CONTROLS. BANNER ARMS.	
P6	GARDCO	PUREFORM	P26-48L-500-MW-G2-3	(15.2' X 32.4' X 5.5')	SINGLE HEAD AREA LIGHT - TYPE 3	LED	UNV	75 W	4000K	10401 LM	SEE OPTIONS	DIE-CAST ALUMINUM	POLE MOUNTED	TYPE 2 DISTRIBUTION	TBD	SINGLE HEAD. PROVIDE INTEGRAL MOTION SENSOR WITH BI-LEVEL DIMMING CONTROLS. BANNER ARMS.	
P7	GARDCO	PUREFORM	P26-48L-500-MW-G2-4	(15.2' X 32.4' X 5.5')	SINGLE HEAD AREA LIGHT - TYPE 4	LED	UNV	75 W	4000K	10789 LM	SEE OPTIONS	DIE-CAST ALUMINUM	POLE MOUNTED	TYPE 2 DISTRIBUTION	TBD	SINGLE HEAD. PROVIDE INTEGRAL MOTION SENSOR WITH BI-LEVEL DIMMING CONTROLS. BANNER ARMS.	
P7-2	GARDCO	PUREFORM	P26-48L-500-MW-G2-4	(15.2' X 32.4' X 5.5')	90 DEGREES DOUBLE HEAD AREA LIGHT - TYPE 4	LED	UNV	75 W	4000K	10789 LM	SEE OPTIONS	DIE-CAST ALUMINUM	POLE MOUNTED	TYPE 2 DISTRIBUTION	TBD	SINGLE HEAD. PROVIDE INTEGRAL MOTION SENSOR WITH BI-LEVEL DIMMING CONTROLS. BANNER ARMS.	
P8	GARDCO	PUREFORM	P15-C-A02-840T2S	(15.6" X 22.1" X 3.4")	SINGLE HEAD AREA LIGHT - TYPE T2S	LED	480V	36 W	4000K	4070 LM	SEE OPTIONS	DIE-CAST ALUMINUM	POLE MOUNTED	TYPE 3 DISTRIBUTION	TBD	SINGLE HEAD. PROVIDE INTEGRAL MOTION SENSOR WITH BI-LEVEL DIMMING CONTROLS. BANNER ARMS.	
PT9	GARDCO	PUREFORM	PPT-196L-1150-NW-G2-2-UNV	(20.32" DIA X 19.63")	SINGLE HEAD AREA LIGHT - TYPE 2	LED	480V	51 W	4000K	4933 LM	SEE OPTIONS	DIE-CAST ALUMINUM	POLE MOUNTED	TYPE 2 DISTRIBUTION	TBD	SINGLE HEAD. PROVIDE INTEGRAL MOTION SENSOR WITH BI-LEVEL DIMMING CONTROLS. BANNER ARMS.	
W4	GARDCO	PUREFORM	PWS-48L-400-NW-G2-4	(15.58" X 15.66" X 6.16")	WALL SCONCE	LED	UNV	61 W	4000K	7938 LM	SEE OPTIONS	DIE-CAST ALUMINUM	POLE MOUNTED	TYPE 4 DISTRIBUTION	TBD		
B1	GARDCO	PUREFORM	PBL-14L-600-NW-G2-3-UNV		BOLLARD	LED	UNV	30 W	4000K		SEE OPTIONS	EXTRUDED ALUMINUM	BOLLARD	TYPE 3 DISTRIBUTION	TBD		
P3, P4 POLE	GARDCO	SSA	5"	(27' X 5')	AREA LIGHT POLE - TYPES P3, P4							EXTRUDED ALUMINUM	GROUND MOUNT		TBD	PROVIDE 17" TRANSFORMER BASE. DRILLING PER FIXTURE HEAD TYPE DESCRIPTION. BANNER ARMS. OVERALL HEIGHT OF POLE AND TRANSFORMER BASE NOT TO EXCEED 27'-0"	
P6, P7 POLE	GARDCO	SSA	4"	(16' X 4')	AREA LIGHT POLE - TYPES P6, P7							EXTRUDED ALUMINUM	GROUND MOUNT		TBD	PROVIDE 17" TRANSFORMER BASE. DRILLING PER FIXTURE HEAD TYPE DESCRIPTION. BANNER ARMS. OVERALL HEIGHT OF POLE AND TRANSFORMER BASE NOT TO EXCEED 16'-0"	
P8, PT9 POLE	GARDCO	SSA	4"	(12' X 4')	AREA LIGHT POLE - TYPES P8, PT9							EXTRUDED ALUMINUM	GROUND MOUNT		TBD	PROVIDE HEAD DRILLING PER FIXTURE HEAD TYPE DESCRIPTION	
G1	HADCO	FLEXSCAPE	B9-DWXXSP1	6" X 10"	TREE UPLIGHT	LED	277V	19 W	3000K	2000 LM	FIXED OUTPUT	DIE-CAST ALUMINUM	GROUND MOUNT		DARK BRONZE	MOUNT TO AN ARLINGTON GPD198 DARK BRONZE PEDESTAL WITH WP-GFI OUTLET	HADCO
G2	POINT LIGHTING		PRL-97004-1C-G-PLS-NC-VB	(8" Φ X 5" DP)	FATO PERIMETER LIGHT	LED	120V	3.5 W	3500K			DIE-CAST ALUMINUM	FLUSH GROUND MOUNT	GLASS			
G3	POINT LIGHTING		PSF-53063-6-T-PLS-V	24" X 4"	FLOODLIGHT	LED	120V	21 W	3500K	4725 LM		DIE-CAST ALUMINUM	GROUND MOUNT				
G4	POINT LIGHTING		PRL-97004-1C-G-PLS-NC-VB	(8" Φ X 5" DP)	TLOF PERIMETER LIGHT	LED	120V	3.5 W	3500K			DIE-CAST ALUMINUM	FLUSH GROUND MOUNT	GLASS			
G5	POINT LIGHTING		PWC-8061L-AC-ON-FF-B-G-SM-T	5" HIGH	INTERNALLY ILLUMINATED WIND CONE	LED	120V	128 W	3500K			STAINLESS STEEL	ROOF			HELIPORT WIND SOCK	
G6	POINT LIGHTING		HAPI-89001-1-F-PLS	(15" X 12" X 9")	APPROACH PATH INDICATOR	LED	120V	70 W	3500K			DIE-CAST ALUMINUM	GROUND MOUNT	GLASS		PROVIDE HAPI PROGRAMMER	
G7	POINT LIGHTING		VAGS-89021-1-F-PLS		VERTICAL ALIGNMENT	LED	120V		3500K								
G8	POINT LIGHTING		PHB-37002-WGY-1-H		HELIPORT BEACON	LED	120V		3500K							PROVIDE LIGHTING SYSTEM CONTROLLER	
G9	HADCO	LANDSCAPE	I1.5N FL	(7.5" DIA X 6")	INGROUND UPLIGHT	LED	277V	12 W	3000K			FIBERGLASS	GROUND MOUNT	BOR SILICATE	CAST BRONZE		

09/23/2022 10:00:44 AM K:\Mount... 8/19/2022 10:00:44 AM B:\365\Mount Carmel\18 - Dublin\180017\MKSK\Northwest - E108.rvt