



January 8, 2019

Chris Winkle,
VP of Land Acquisition & Development
Noah's Event Venue

Re: Noah's Event Venue Final Address
Community: City of Dublin, Franklin County, Ohio 43016

Dear Mr. Winkle,

The City of Dublin has assigned the Final address to this project as **6180 Eiterman Road**, with an alternative address of 6750 Shier Rings Road. The decision for the final address for this corner lot was made since the access driveway is located on Eiterman Road, and the direction of the building is diagonal to the interception. PID 274-001353. If you have any questions please feel free to contact our office at 614-410-4600

Please see attachment.


Sincerely,

Carlos Gonzalez
Engineering Technician I

Attachments

Cc: Email Distribution List

Caitlynn Seymour, Police

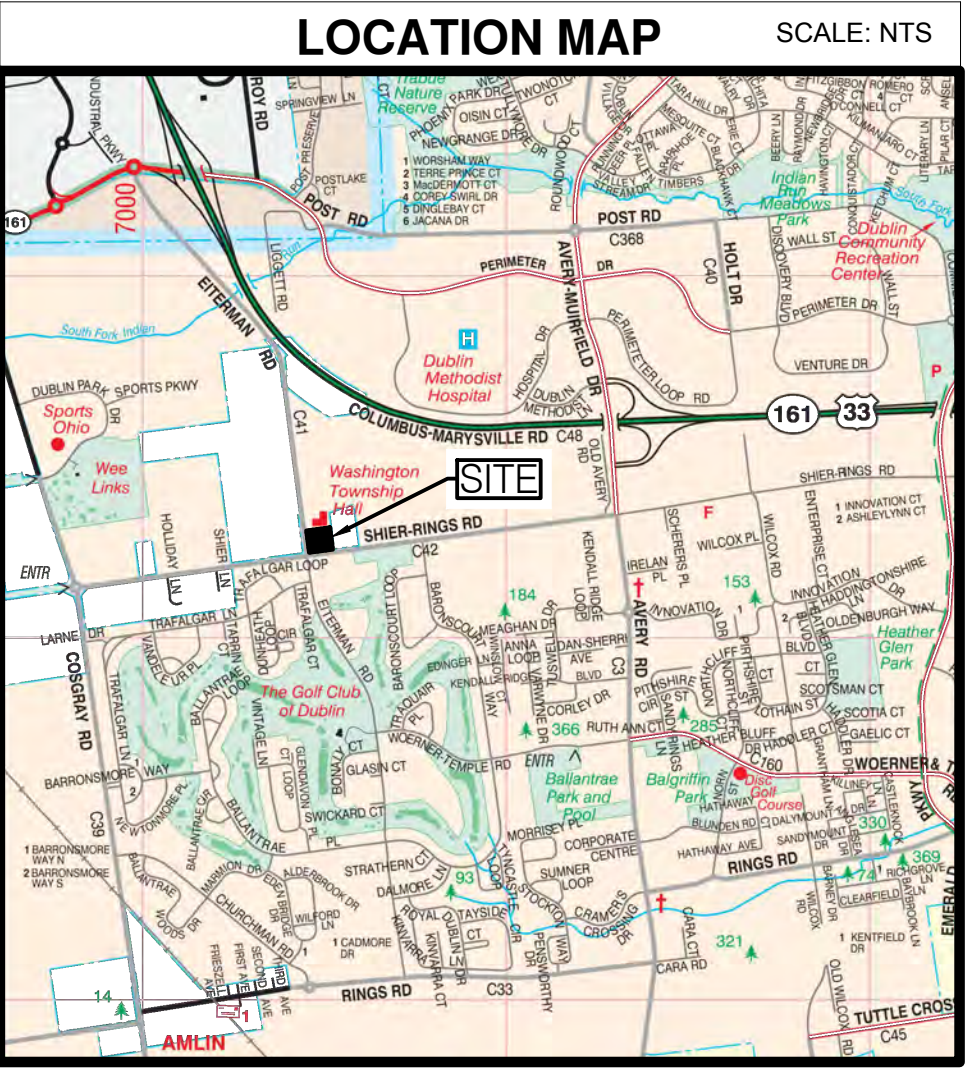

A THE CONTRACTOR SHALL CONTROL SOIL EROSION RESULTING FROM THE PROPOSED IMPROVEMENTS. THE USE OF SILT FENCING, JUTE MATTING, TEMPORARY SEEDING, SILT CHECKS, INLET PROTECTION AROUND ALL CATCH BASINS, STABILIZED CONSTRUCTION ENTRANCE(S), ETC. MAY BE REQUIRED; REFER TO PLAN. SEDIMENT CONTROL STRUCTURES/DEVICES SHALL BE INSTALLED IN ACCORDANCE WITH THE LATEST EDITION OF CITY OF DUBLIN, STATE OF OHIO STANDARDS FOR STORMWATER MANAGEMENT, LAND DEVELOPMENT AND URBAN STREAM PROTECTION. SEDIMENT CONTROL DEVICES MUST BE INSTALLED PRIOR TO BEGINNING ANY CONSTRUCTION ACTIVITY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONTINUED INSPECTION AND MAINTENANCE OF ALL SEDIMENT CONTROL DEVICES. THE CONTRACTOR SHALL FOLLOW THE REQUIREMENTS SET FORTH ON THE APPROVED STORMWATER POLLUTION PREVENTION PLAN IF APPLICABLE, OR AS DETAILED ON THE CONSTRUCTION PLANS, AS SPECIFIED BY CITY OF DUBLIN, FRANKLIN COUNTY, STATE OF OHIO, USA.


B IT IS THE CONTRACTOR'S RESPONSIBILITY TO UPDATE BMP CONTROLS AS SITE CONDITIONS WARRANT. MORE CONTROLS MAY BE REQUIRED PER SITE CONDITIONS. THE CONTRACTOR SHALL INCLUDE THESE COSTS IN THE BASE BID. ANY AREA WHERE EROSION IS OBSERVED MUST BE ADDRESSED BY THE CONTRACTOR, WHETHER SHOWN ON THE PLANS OR NOT. IN THE CASE THAT DOWNSTREAM EROSION IS OBSERVED, THE CONTRACTOR MUST CONTACT THE ENGINEER OF RECORD FOR RECOMMENDATIONS.

C PERMANENT EROSION CONTROL, TURF ESTABLISHMENT, AND SOIL STABILIZATION IS THE RESPONSIBILITY OF THE CONTRACTOR. THE INTENT OF THIS PLAN IS TO PROVIDE GUIDANCE FOR PLACEMENT OF BEST MANAGEMENT PRACTICES.


D CONTRACTOR SHALL BE RESPONSIBLE FOR PROPER CLEANING AND DISPOSAL OF ANY DEBRIS TAKEN OFF SITE. CONTRACTOR IS RESPONSIBLE FOR ALL FINES AND FEES FOR IMPROPER PLACEMENT OR MAINTENANCE OF CONTROLS.

E ALL SLOPES STEEPER THAN 3:1 SHALL HAVE BONDED FIBER MATRIX OR EROSION CONTROL MATTING APPLIED

	EXISTING CONTOURS
	PROPOSED CONTOURS
	STABILIZED CONSTRUCTION ENTRANCE
	INLET PROTECTION
	SILT FENCE
	LIMITS OF CONSTRUCTION
	TEMPORARY STOCKPILE
	CONCRETE WASHOUT
	SLOPE STABILIZATION PLANTING WITH FIBER MATRIX OR EROSION CONTROL MATTING APPLIED. CROWN VETCH SEE PERMANENT SEEDING SPEC ON C302

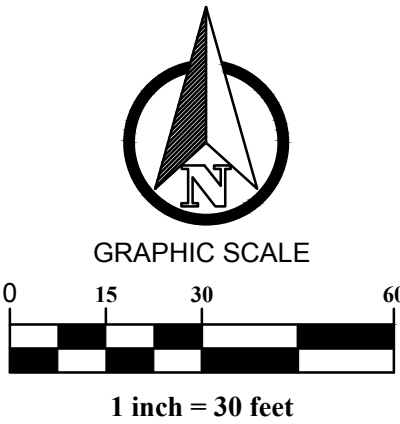

brock
engineering
NATHAN HARRINGTON
E: NHARRINGTON@BRACKENG.COM

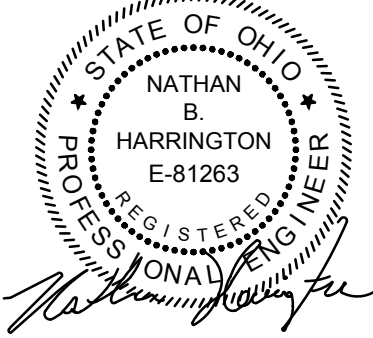

EITERMAN RD & SHIER RINGS RD., DUBLIN OHIO

[illegible]

C300