Addendum # 3 -- 17-012.0-CIP -- E-Mail Coversheet

Limerick Lane Stormwater Improvements

Planholder	*Company E-Mail*	*Company Contact*
Allied Construction Industries	coakley@aci-construction.org	Candi Oakley
Builders Exchange	INFO@bxohio.com	Kristin Niemeyer
Columbus Asphalt Paving, Inc.	dpower@capasphalt.com	Daivid Powers
ConstructConnect	:aterina.house@constructconnect.con	Katerina House
Construction Journal	d.dybzinski@constructionjournal.com	Donna Dybzinski
Construction Video Media	)arbara@constructionvideomedia.con	Barbara Lemanski
Danbert Electric	jstone@danbertinc.com	Joe Stone
George J. Igel & Company, Inc.	matt.check@igelco.com	Matt Check
JMT	mpetit@jmt.com	Matthew Petit
Shelly & Sands, Inc.	j.schultz@shellyandsands.com	Jeff Schultz
Strawser Paving Company, Inc.	clayS@strawserpaving.com	Clay Strawser
The Blue Book	pdurba@thebluebook.com	The Blue Book
Trucco Construction Company	joel.cochran@truccoconstruction.com	Joel Cochran
Vititoe Construction, Inc.	VITITOE@FRONTIER.COM	Mike Vititoe

Please sign, date and return by e-mail to hgeorge@dublin.oh.us to verify receipt of this addendum. Attach signed copy of addendum to bid package when submitting a bid.

Received by:_____ Date: _____

City of Dublin

Date of Addendum
Mar 28, 2018

City of Dublin -- Division of Engineering
5800 Shier-Rings Road Dublin OH 43016
Phone (614) 410-4640 Fax (614) 761-650

ADDENDUM NO. 3
to the contract for

Limerick Lane Stormwater Improvements
17-012-CIP
Bid Opening Date: April 3, 2018

TO PROSPECTIVE BIDDERS: The following changes shall be made part of the contract documents for this project:

Bid Schedule

Bid schedule sheet 26-1 is being provided in Microsoft Excel format ***and*** PDF format. Previous Addendum #2 only included PDF format.

Bid Sheets

Plan sheets 7 and 8 include minor corrections. Please note changes associated with the following corrections:

Sheet 7
Change: 178′ of 30″ STM @ 0.53%
To: 178′ of 30″ STM @ 1.00%

Sheet 8
Change: 20′ of 12″ STM @ 0.00%
To: 20′ of 12″ STM @ 0.50%

Change: Backfill Per COC Item 613
To: Backfill Per COC Item 912

Additional PDFs of Plan Sheets 7 and 8 are included as part of this Addendum #3, with the sheets displaying clouded changes.

* * * * * * * * * * *

* * * Beginning of Sheet 2 * * *

Addendum Approved By:

Paul A. Hammersmith, PE
Director of Engineering/City Engineer

03-28-2018
Date

* * * * * * * * * * *

Terminus for Addendum No. 3
Certification by Bidder

Bidder shall sign and date one copy of this Addendum No. 3 and submit with his proposal as evidence of receipt and evaluation of same in his bid analysis.

Signed: _____ **Date:** _____

Company: _____

* * * End of Sheet 2 * * *

BID SCHEDULE

BIDDER agrees to perform all work described in the CONTRACT DOCUMENTS for the following unit prices:

LIMERICK LANE STORMWATER IMPROVEMENTS
17-012-CIP

CITY OF DUBLIN

REF NO.	(1) ITEM	(2) DESCRIPTION	(3) QUANT.	(4) UNIT	(5) LABOR($)	(6) MATERIAL($)	(7) (5)+(6) TOTAL($)	(8) (3) X (7) TOTAL EXTENDED INFORMAL PRICE($)
		GENERAL						
1	201	CLEARING AND GRUBBING	1	LUMP				
2	202	CATCH BASIN REMOVED	4	EA.				
3	202	ENDWALL REMOVED	1	EA.				
4	202	PAVEMENT REMOVED	1365	S.Y.				
5	202	CURB & GUTTER REMOVED	32	L.F.				
6	202	PIPE REMOVED	167	L.F.				
7	202	PIPE FILLED IN PLACE	439	L.F.				
8	204	SUBGRADE COMPACTION	1365	S.Y.				
9	301	ASPHALT CONCRETE BASE	265	C.Y.				
10	448	ASPHALT CONCRETE SURFACE COURSE, PG64-22	48	C.Y.				
11	448	ASPHALT CONCRETE INTERMEDIATE COURSE, PG64-22	67	C.Y.				
12	604	MANHOLE (AA-S102)	10	EA.				
13	604	MANHOLE (AA-S104)	1	EA.				
14	604	CATCH BASIN (AA-S133A)	3	EA.				
15	604	CATCH BASIN (AA-S133B)	3	EA.				
16	604	ENDWALL (AA-S169)	1	EA.				
17	609	COMBINATION CURB & GUTTER	32	L.F.				
18	614	MAINTAINING TRAFFIC	1	LUMP				
19	623	CONSTRUCTION LAYOUT STAKES	1	LUMP				
20	624	MOBILIZATION AND GENERAL CONDITIONS	1	LUMP				
21	659	SEEDING AND MULCHING	400	S.Y.				
22	670	EROSION PROTECTION	1	LUMP				
23	901	12" HDPP PIPE, TYPE 1 BEDDING & 911 BACKFILL	27	L.F.				
24	901	12" HDPP PIPE, TYPE 1 BEDDING & 912 BACKFILL	50	L.F.				
25	901	15" HDPP PIPE, TYPE 1 BEDDING & 613 BACKFILL	40	L.F.				
26	901	15" HDPP PIPE, TYPE 1 BEDDING & 912 BACKFILL	683	L.F.				
27	901	18" HDPP PIPE, TYPE 1 BEDDING & 912 BACKFILL	334	L.F.				
28	901	24" HDPP PIPE, TYPE 1 BEDDING & 911 BACKFILL	8	L.F.				
29	901	24" HDPP PIPE, TYPE 1 BEDDING & 912 BACKFILL	20	L.F.				
30	901	30" HDPP PIPE, TYPE 1 BEDDING & 911 BACKFILL	118	L.F.				
31	901	30" HDPP PIPE, TYPE 1 BEDDING & 912 BACKFILL	228	L.F.				
32	903	ROCK EXCAVATION WHERE THE CONTRACTOR CANNOT USE EXPLOSIVES	136	C.Y.				
33	SPECIAL	15" CONCRETE FLARED END SECTION	1	EA.				
							SANITARY SEWER SUBTOTAL=	
				TOTAL BASE BID (REF. #'s 1 - 33) =				

SUBMITTED BY (COMPANY): _____

INSPIRED PEOPLE ▲ CREATIVE DESIGN ▲ TRANSFORMING COMMUNITIES

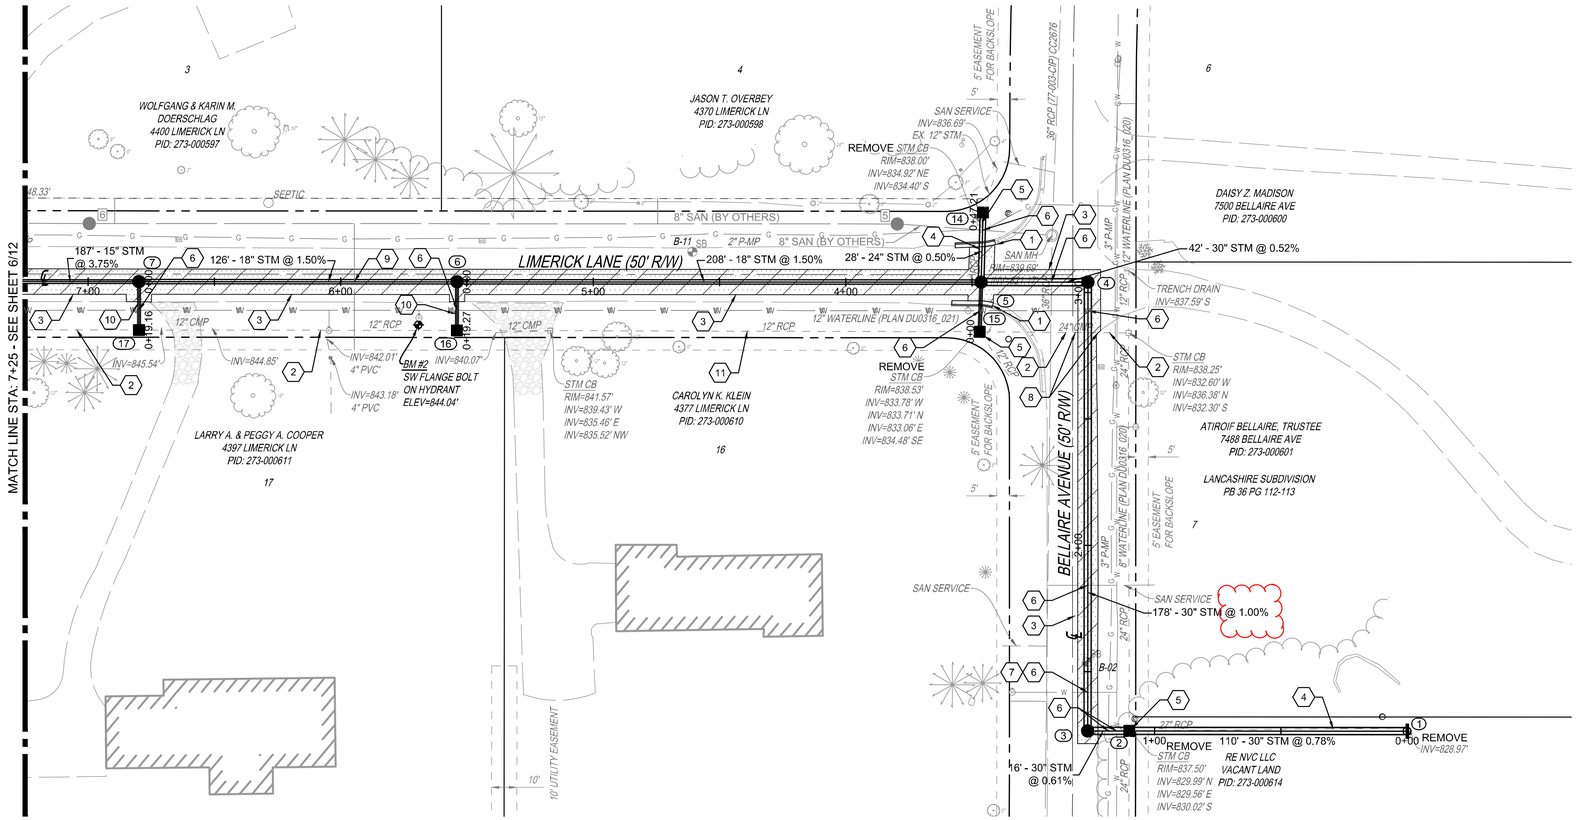

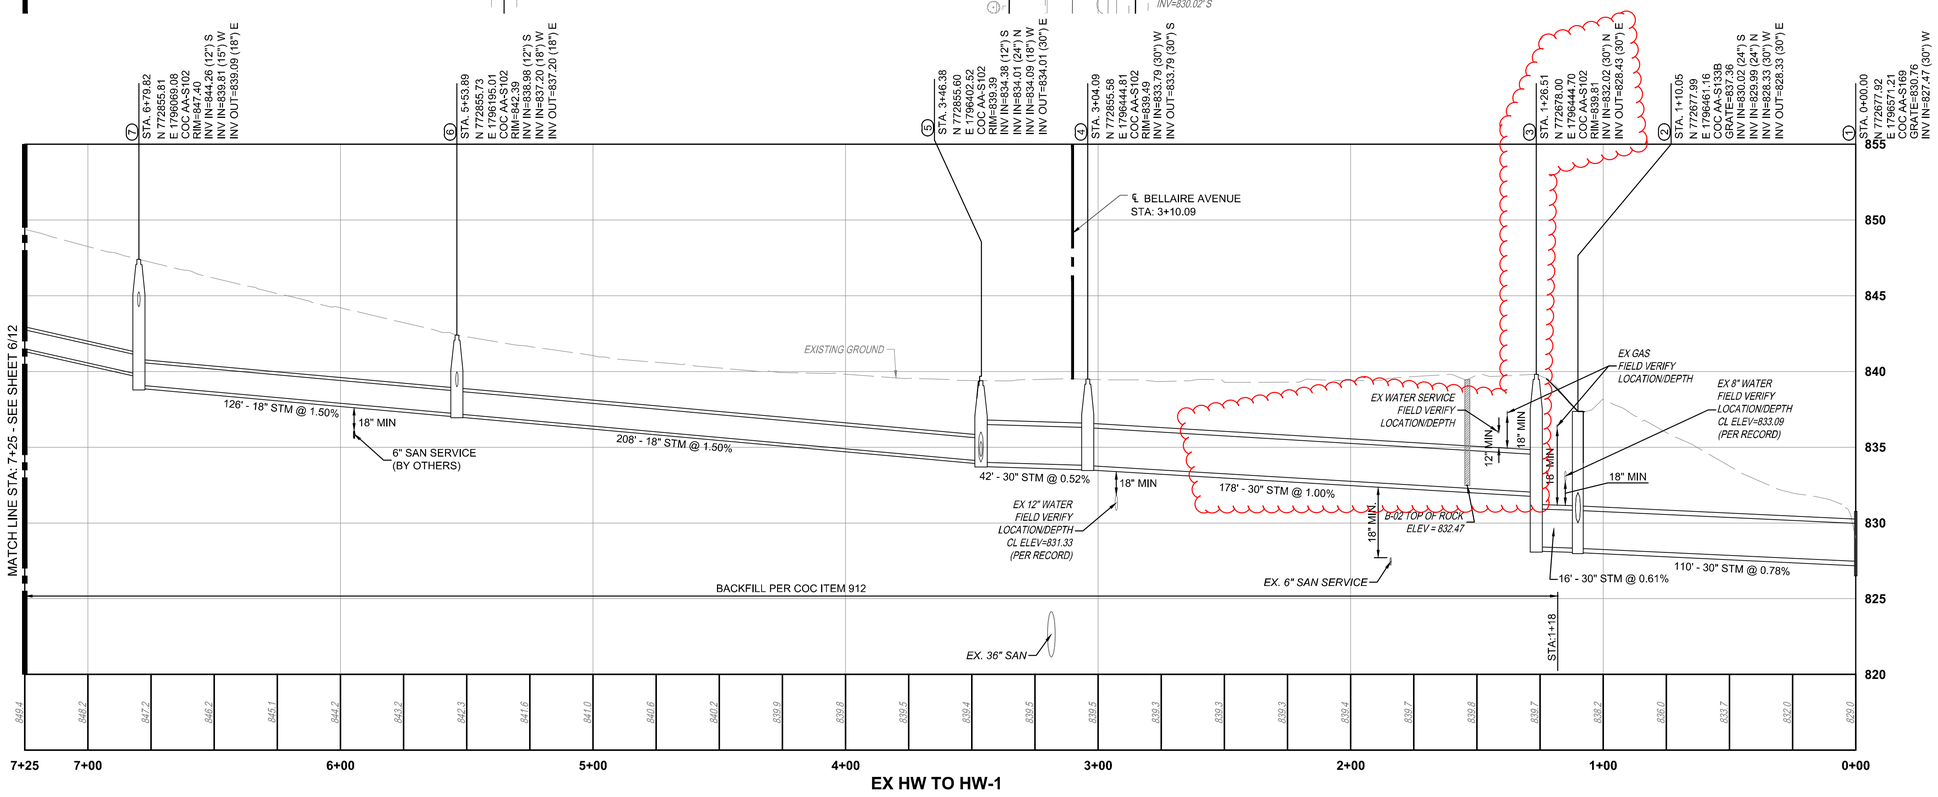

PROPOSED SYMBOLS

- PROPOSED TRENCH LIMITS PER COC STD 1441
- STM — PROPOSED STORM PIPE
- SAN — PROPOSED SANITARY PIPE
- (15) PROPOSED STORM MANHOLE
- (15) PROPOSED CATCH BASIN
- (6) PROPOSED SANITARY MANHOLE (BY OTHERS)

CODED NOTES

1. REMOVE AND REPLACE 16 LF OF EX. CURB & GUTTER PER RD-02
2. EXISTING STORM SEWER TO BE ABANDONED IN PLACE. BLOCK & PLUG EX. STORM SEWER AND GROUT IN PLACE.
3. REMOVE AND REPLACE EX. PAVEMENT PER COC STD 1441
4. REMOVE EX. STORM SEWER
5. REMOVE EX. CATCH BASIN
6. CONTRACTOR TO VERIFY EXACT LOCATIONS AND DEPTHS OF EXISTING UTILITIES PRIOR TO CONSTRUCTION. NOTIFY ENGINEER IN CASE OF CONFLICT.
7. EXISTING WATER SERVICE, DO NOT DISTURB
8. REMOVE 9 LF OF 24" STM PIPE
9. 6" SANITARY SERVICE (BY OTHERS). CONTRACTOR TO VERIFY EXACT LOCATION AND DEPTH PRIOR TO CONSTRUCTION. NOTIFY ENGINEER IN CASE OF CONFLICT.
10. SEE STORM PROFILE ON SHEET 8.
11. EXISTING STORM SEWER TO REMAIN

NOTES

1. ALL BACKFILL PER CITY OF COLUMBUS ITEM 911 UNLESS OTHERWISE SPECIFIED.

OHIO Utilities Protection SERVICE
811 or 1-800-362-2764 Call Before You Dig

THE KLEINGERS GROUP
CIVIL ENGINEERING
SURVEYING
LANDSCAPE ARCHITECTURE
www.kleingers.com
350 Worthington Rd, Ste B
Westerville, OH 43082
614.882.4311

SEAL: STATE OF OHIO — MICHAEL J. COUVREUR E-70851 REGISTERED PROFESSIONAL ENGINEER

NO.	DATE	DESCRIPTION
1	02/24/17	30% SUBMITTAL
2	04/07/17	60% SUBMITTAL
3	07/07/17	90% SUBMITTAL
4	03/13/18	BID DOCUMENTS

LIMERICK LANE STORMWATER IMPROVEMENTS 17-012-CIP

CITY OF DUBLIN, OHIO

PROJECT NO: 160688.001
DATE: 03/13/2018
SCALE: V 0 2.5 5 10 / H 0 15 30 60

SHEET NAME:

LIMERICK LANE PLAN & PROFILE

SHEET NO.

7/12

H:\Columbus\P\160688\DWG\Sheets STM\160688STM001.dwg, 3/23/2018 5:33:07 AM, mcouvreur

INSPIRED PEOPLE ▲ CREATIVE DESIGN ▲ TRANSFORMING COMMUNITIES

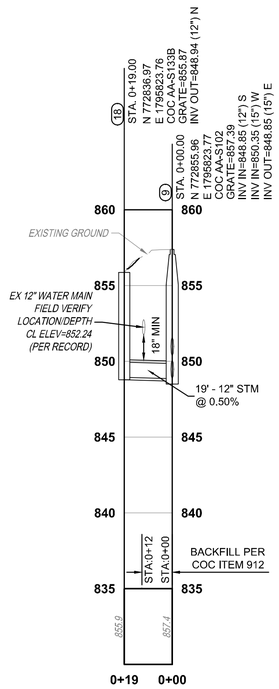

CB-9 TO MH-18

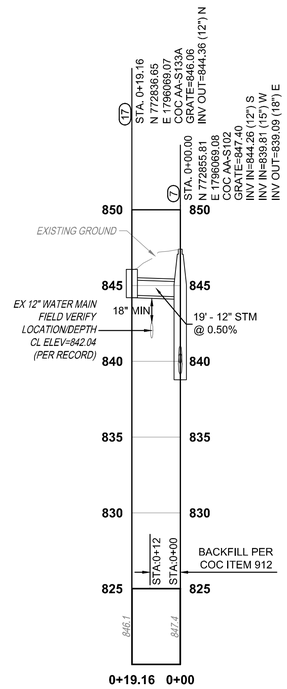

CB-7 TO MH-17

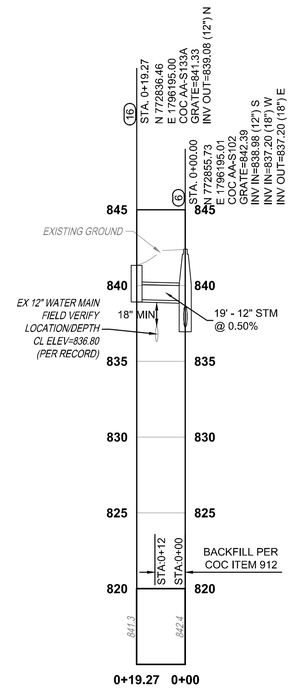

CB-6 TO MH-16

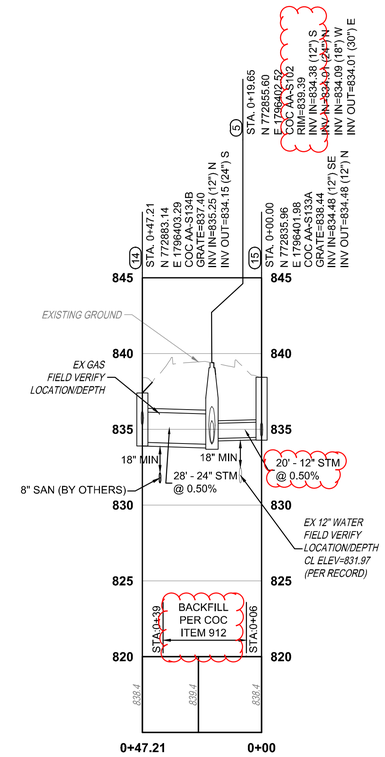

CB-14 TO CB-15

NOTES

1. ALL BACKFILL PER CITY OF COLUMBUS ITEM 911 UNLESS OTHERWISE SPECIFIED.

OHIO Utilities Protection SERVICE
811 or 1-800-362-2764 Call Before You Dig

THE KLEINGERS GROUP

CIVIL ENGINEERING
SURVEYING
LANDSCAPE ARCHITECTURE

www.kleingers.com
350 Worthington Rd, Ste B
Westerville, OH 43082
614.882.4311

SEAL:

STATE OF OHIO
MICHAEL J. COUVREUR
E-70851
REGISTERED
PROFESSIONAL ENGINEER

NO.	DATE	DESCRIPTION
1	02/24/17	30% SUBMITTAL
2	04/07/17	60% SUBMITTAL
3	07/07/17	90% SUBMITTAL
4	03/13/18	BID DOCUMENTS

LIMERICK LANE STORMWATER IMPROVEMENTS 17-012-CIP

CITY OF DUBLIN, OHIO

PROJECT NO: 160688.001

DATE: 03/13/2018

SCALE:
V 0 2.5 5 10
H 0 15 30 60

SHEET NAME:

STORM SEWER PROFILES

SHEET NO.

8/12

H:\Columbus\P\160688\DWG\Sheets STM\160688CUTB001.dwg, 3/28/2018 2:18:23 PM, mcouvreur